



# Патентная классификация

## Структура и использование

Андрю Чайковски

руководитель отдела инноваций и технической поддержки

Вебинар  
12 сентября  
2013 г.

# Обзор

- Подходы к определению соответствующей патентной классификации
- Обзор структуры патентной классификации (МПК) и ее опубликования

# Сценарий



- Компания по производству строительных материалов обратилась к вам с просьбой провести поиск по технологиям, связанным с теплоизоляцией домов.

Источник: Эндрю Данн (вверху), Радомил (Wikipedia PL) (внизу)

# Сценарий

- Вы решаете использовать патентную классификацию, чтобы определить соответствующие технологии.

# Преимущества патентной классификации

- Стандартизированное применение
- Охватывает (почти) все патентные документы
- Охватывает старые патентные документы, по которым отсутствует или практически отсутствует пригодный для поиска текст

# Подходы

- Обзор отдельных документов
- Анализ пакетов документов
- Отсылка к опубликованной патентной классификации

# Отдельные документы


Sort by: Pub Date Desc View All List Length 10

No	Ctr	Title	PubDate	Int. Class	Appl No	Applicant	Inventor
1.	WO	WO/2013/113703 - HEATING DEVICE, USE OF SUCH A HEATING DEVICE AND PRODUCTION METHOD	08.08.2013	H05B 3/14	PCTEP2013/051695	E.G.O. ELEKTRO-GERATEBAU GMBH	HORMSMANN, Karl, Heinz
<p>A heating device for an electrical household appliance has a large-area heating element or substantially comprises such a large-area heating element, wherein the heating element has electrical connections. The heating element comprises a material mixture of vermiculite and electrically conductive components such as metal particles, carbon black particles or graphite particles, and oxides. In this case, the electrically conductive components are distributed substantially over the entire heating element, advantageously uniformly. Thus, a heating device is provided which can be used simultaneously as thermal insulation and can form, for example, an inner rear wall of a refrigerator for a defrost function.</p>							
2.	WO	WO/2013/115969 - SYSTEM FOR CONTROLLING TEMPERATURE OF SUBSEA EQUIPMENT	08.08.2013	G05D 23/00	PCTUS2012/063758	CAMERON INTERNATIONAL CORPORATION	MCHUGH, Edmund Peter
<p>An underwater assembly includes a flow control device and an actuator coupled to the flow control device, where the actuator is configured to actuate the flow control device. The underwater assembly further includes an insulator housing surrounding the flow control device and the actuator, where the housing is configured to retain heat. The underwater assembly also includes a thermal control system comprising a heat exchanger configured to control a temperature of the actuator.</p>							
3.	WO	WO/2013/114861 - INFRARED SENSOR	08.08.2013	G01J 1/02	PCTJP2013/000467	MITSUBISHI MATERIALS CORPORATION	TARI, Kazuyoshi
<p>Provided is an infrared sensor with which highly precise temperature measurement of a subject to be measured is possible without requiring a thermal balance even when lead lines are connected to one side. The infrared sensor comprises: an insulation film (2); a first heat-sensitive element (3A) and a second heat-sensitive element (3B) which are disposed on one face of the insulation film; a first wiring membrane (4A) which is connected to the first heat-sensitive element and a second wiring membrane (4B) which is connected to the second heat-sensitive element; said wiring membranes being formed on one face of the insulation film; an infrared reflecting membrane (5) which is disposed on the other face of the insulation film, opposite to the second heat-sensitive element; a plurality of terminal electrodes (6) which are disposed on the same end part side of the insulation film and which are connected to the corresponding first wiring membrane and second wiring membrane; and a thermal resistance adjustment membrane (7) which is disposed on the other face of the insulation film, which is in opposition to at least a portion of the longer of the first wiring membrane and the second wiring membrane in wiring distance from the terminal electrodes, and which is formed of a material with greater heat dissipation than the insulation film.</p>							

→ Поиск документов (поиск по ключевым словам)

# Отдельные документы

No	Cr	Pub Date Desc	Title	PubDate	Int. Class	Appl No	Applicant	Inventor
1.	WO	WO/2013/113703	HEATING DEVICE, USE OF SUCH A HEATING DEVICE AND PRODUCTION METHOD	08.08.2013	H05B 3/14	PCTEP2013/051695	E.G.O. ELEKTRO-GERATEBAU GMBH	HORMSMANN, Karl, Heinz
<p>A heating device for an electrical <b>household</b> appliance has a large-area heating element or substantially comprises such a large-area heating element, wherein the heating element has electrical connections. The heating element comprises a material mixture of vermiculite and electrically conductive components such as metal particles, carbon black particles or graphite particles, and others. In this case, the electrically conductive components are distributed substantially over the entire heating element, advantageously uniformly. Thus, a heating device is provided which can be used simultaneously as <b>thermal insulation</b> and can form, for example, an inner rear wall of a refrigerator for a defrost function.</p>								
2.	WO	WO/2013/115863	SYSTEM FOR CONTROLLING TEMPERATURE OF SUBSEA EQUIPMENT	08.08.2013	G05D 23/00	PCTUS2012/063758	CAMERON INTERNATIONAL CORPORATION	MCHUGH, Edmund Peter
<p>An underwater assembly includes a flow control device and an actuator coupled to the flow control device, where the actuator is configured to actuate the flow control device. The underwater assembly further includes an insulator <b>housing</b> surrounding the flow control device and the actuator, where the <b>housing</b> is configured to retain <b>heat</b>. The underwater assembly also includes a thermal control system comprising a heat exchanger configured to control a temperature of the actuator.</p>								
3.	WO	WO/2013/114861	INFRARED SENSOR	08.08.2013	G01J 1/02	PCTJP2013/000467	MITSUBISHI MATERIALS CORPORATION	TARI, Kazuyoshi
<p>Provided is an infrared sensor with which highly precise temperature measurement of a subject to be measured is possible without reacting a thermal balance even when lead lines are connected to one side. The infrared sensor comprises: an <b>insulation</b> film (2); a first <b>heat</b>-sensitive element (3A) and a second <b>heat</b>-sensitive element (3B) which are disposed on one face of the insulation film; a first wiring membrane (4A) which is connected to the first <b>heat</b>-sensitive element and a second wiring membrane (4B) which is connected to the second <b>heat</b>-sensitive element; said wiring membranes being formed on one face of the insulation film; an infrared reflecting membrane (5) which is disposed on the other face of the <b>insulation</b> film, opposite to the second <b>heat</b>-sensitive element; a plurality of terminal electrodes (6) which are disposed on the same end part side of the insulation film and which are connected to the corresponding first wiring membrane and second wiring membrane; and a thermal resistance adjustment membrane (7) which is disposed on the other face of the insulation film, which is in opposition to at least a portion of the longer of the first wiring membrane and the second wiring membrane in wiring distance from the terminal electrodes, and which is formed of a material with greater <b>heat</b> dissipation than the <b>insulation</b> film.</p>								

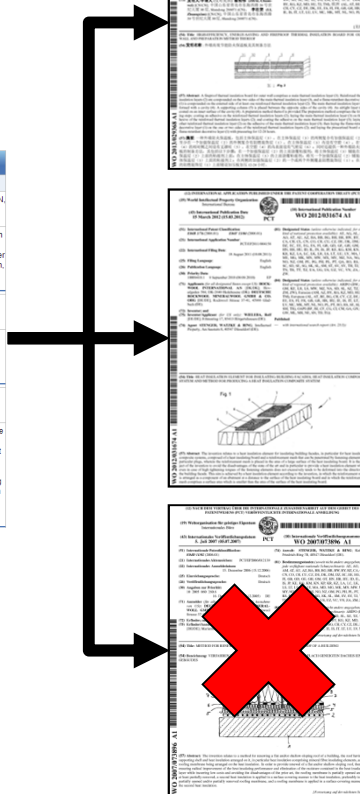


→ Отобразить релевантные документы



# Отдельные документы

No	Ctr	Title	PubDate	Int. Class	Appl No	Applicant	Inventor
1.	WO	WO/2013/113703 - HEATING DEVICE, USE OF SUCH A HEATING DEVICE AND PRODUCTION METHOD	08.08.2013	H05B 3/14	PCTEP2013/051695	E.G.O. ELEKTRO-GERATEBAU GmbH	HORMSMANN, Karl, Heinz
<p>A heating device for an electrical <b>household</b> appliance has a large-area heating element or substantially comprises such a large-area heating element, wherein the heating element has electrical connections. The heating element comprises a material mixture of vermiculite and electrically conductive components such as metal particles, carbon black particles or graphite particles, and oxides. In this case, the electrically conductive components are distributed substantially over the entire heating element, advantageously uniformly. Thus, a heating device is provided which can be used simultaneously as <b>thermal insulation</b> and can form, for example, an inner rear wall of a refrigerator for a defrost function.</p>							
2.	WO	WO/2013/115863 - SYSTEM FOR CONTROLLING TEMPERATURE OF SUBSEA EQUIPMENT	08.08.2013	G05D 23/00	PCTUS2012/063758	CAMERON INTERNATIONAL CORPORATION	MCULUGH, Edmund Peter
<p>An underwater assembly includes a flow control device and an actuator coupled to the flow control device, where the actuator is configured to actuate the flow control device. The underwater assembly further includes an insulator <b>housing</b> surrounding the flow control device and the actuator, where the <b>housing</b> is configured to retain <b>heat</b>. The underwater assembly also includes a thermal control system comprising a heat exchanger configured to control a temperature of the actuator.</p>							
3.	WO	WO/2013/114861 - INFRARED SENSOR	08.08.2013	G01J 1/02	PCTJP2013/000467	MITSUBISHI MATERIALS CORPORATION	TARI, Kazuyoshi
<p>Provided is an infrared sensor with which highly precise temperature measurement of a subject to be measured is possible without reacting a thermal balance even when lead lines are connected to one side. The infrared sensor comprises: an <b>insulation</b> film (2); a first <b>heat</b>-sensitive element (3A) and a second <b>heat</b>-sensitive element (3B) which are disposed on one face of the insulation film; a first wiring membrane (4A) which is connected to the first <b>heat</b>-sensitive element and a second wiring membrane (4B) which is connected to the second <b>heat</b>-sensitive element; said wiring membranes being formed on one face of the insulation film; an infrared reflecting membrane (5) which is disposed on the other face of the <b>insulation</b> film, opposite to the second <b>heat</b>-sensitive element; a plurality of terminal electrodes (6) which are disposed on the same end part side of the insulation film and which are connected to the corresponding first wiring membrane and second wiring membrane; and a thermal resistance adjustment membrane (7) which is disposed on the other face of the insulation film, which is in opposition to at least a portion of the longer of the first wiring membrane and the second wiring membrane in wiring distance from the terminal electrodes, and which is formed of a material with greater <b>heat</b> dissipation than the <b>insulation</b> film.</p>							

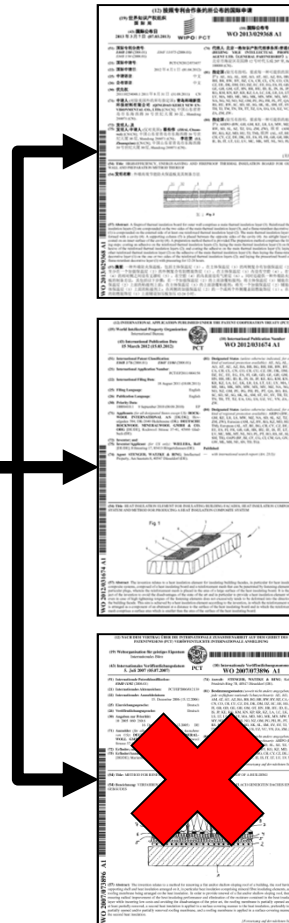

(51) International Patent Classification:  
*E04B 1/76* (2006.01)      *E04F 13/04* (2006.01)

(51) 国际专利分类号:  
*E04B 1/80* (2006.01)      *E04F 13/075* (2006.01)  
*E04B 1/94* (2006.01)

→ Отметьте классификационные индексы релевантной документации


# Пакеты документов

No	Cr	Title	PubDate	Int. Class	Appl No	Applicant	Inventor
1.	WO	WO/2013/113703 - HEATING DEVICE, USE OF SUCH A HEATING DEVICE AND PRODUCTION METHOD	08.08.2013	H05B 3/14	PCTEP2013/051695	E.G.O. ELEKTRO-GERATEBAU GMBH	HORMSMANN, Karl, Heinz
<p>A heating device for an electrical <b>household</b> appliance has a large-area heating element or substantially comprises such a large-area heating element, wherein the heating element has electrical connections. The heating element comprises a material mixture of vermiculite and electrically conductive components such as metal particles, carbon black particles or graphite particles, and others. In this case, the electrically conductive components are distributed substantially over the entire heating element, advantageously uniformly. Thus, a heating device is provided which can be used simultaneously as <b>thermal insulation</b> and can form, for example, an inner rear wall of a refrigerator for a defrost function.</p>							
2.	WO	WO/2013/115969 - SYSTEM FOR CONTROLLING TEMPERATURE OF SUBSEA EQUIPMENT	08.08.2013	G05D 23/00	PCTUS2012/063758	CAMERON INTERNATIONAL CORPORATION	MCHUGH, Edmund Peter
<p>An underwater assembly includes a flow control device and an actuator coupled to the flow control device, where the actuator is configured to actuate the flow control device. The underwater assembly further includes an insulator <b>housing</b> surrounding the flow control device and the actuator, where the <b>housing</b> is configured to retain <b>heat</b>. The underwater assembly also includes a thermal control system comprising a heat exchanger configured to control a temperature of the actuator.</p>							
3.	WO	WO/2013/114861 - INFRARED SENSOR	08.08.2013	G01J 1/02	PCTJP2013/000467	MITSUBISHI MATERIALS CORPORATION	TARI, Kazuyoshi
<p>Provided is an infrared sensor with which highly precise temperature measurement of a subject to be measured is possible without requiring a thermal balance even when lead lines are connected to one side. The infrared sensor comprises: an <b>insulation</b> film (2); a first <b>heat</b>-sensitive element (3A) and a second heat-sensitive element (3B) which are disposed on one face of the insulation film; a first wiring membrane (4A) which is connected to the first heat-sensitive element and a second wiring membrane (4B) which is connected to the second heat-sensitive element; said wiring membranes being formed on one face of the insulation film; an infrared reflecting membrane (5) which is disposed on the other face of the <b>insulation</b> film, opposite to the second <b>heat</b>-sensitive element; a plurality of terminal electrodes (6) which are disposed on the same end part side of the insulation film and which are connected to the corresponding first wiring membrane and second wiring membrane; and a thermal resistance adjustment membrane (7) which is disposed on the other face of the insulation film, which is in opposition to at least a portion of the longer of the first wiring membrane and the second wiring membrane in wiring distance from the terminal electrodes, and which is formed of a material with greater <b>heat</b> dissipation than the <b>insulation</b> film.</p>							

→ Поиск документов (поиск по ключевым словам)

# Пакеты документов

No	Ctr	Title	PubDate	Int. Class	Appl No	Applicant	Inventor
1.	WO	WO/2013/113703 - HEATING DEVICE, USE OF SUCH A HEATING DEVICE AND PRODUCTION METHOD	08.08.2013	H05B 3/14	PCTEP2013/051695	E.G.O. ELEKTRO-GERATEBAU GMBH	HORMSMANN, Karl, Heinz
<p>A heating device for an electrical <b>household</b> appliance has a large-area heating element or substantially comprises such a large-area heating element, wherein the heating element has electrical connections. The heating element comprises a material mixture of vermiculite and electrically conductive components such as metal particles, carbon black particles or graphite particles, and others. In this case, the electrically conductive components are distributed substantially over the entire heating element, advantageously uniformly. Thus, a heating device is provided which can be used simultaneously as <b>thermal insulation</b> and can form, for example, an inner rear wall of a refrigerator for a defrost function.</p>							
2.	WO	WO/2013/115863 - SYSTEM FOR CONTROLLING TEMPERATURE OF SUBSEA EQUIPMENT	08.08.2013	G05D 23/00	PCTUS2012/063758	CAMERON INTERNATIONAL CORPORATION	MCHUGH, Edmund Peter
<p>An underwater assembly includes a flow control device and an actuator coupled to the flow control device. Where the actuator is configured to actuate the flow control device. The underwater assembly further includes an insulator <b>housing</b> surrounding the flow control device and the actuator, where the <b>housing</b> is configured to retain <b>heat</b>. The underwater assembly also includes a thermal control system comprising a heat exchanger configured to control a temperature of the actuator.</p>							
3.	WO	WO/2013/114861 - INFRARED SENSOR	08.08.2013	G01J 1/02	PCTJP2013/000467	MTSUBISHI MATERIALS CORPORATION	TARI, Kazuyoshi
<p>Provided is an infrared sensor with which highly precise temperature measurement of a subject to be measured is possible without requiring a thermal balance even when lead lines are connected to one side. The infrared sensor comprises: an <b>insulation</b> film (2); a first <b>heat</b>-sensitive element (3A) and a second heat-sensitive element (3B) which are disposed on one face of the insulation film; a first wiring membrane (4A) which is connected to the first heat-sensitive element and a second wiring membrane (4B) which is connected to the second heat-sensitive element; said wiring membranes being formed on one face of the insulation film; an infrared reflecting membrane (5) which is disposed on the other face of the <b>insulation</b> film, opposite to the second <b>heat</b>-sensitive element; a plurality of terminal electrodes (6) which are disposed on the same end part side of the insulation film and which are connected to the corresponding first wiring membrane and second wiring membrane; and a thermal resistance adjustment membrane (7) which is disposed on the other face of the insulation film, which is in opposition to at least a portion of the longer of the first wiring membrane and the second wiring membrane in wiring distance from the terminal electrodes, and which is formed of a material with greater <b>heat</b> dissipation than the <b>insulation</b> film.</p>							

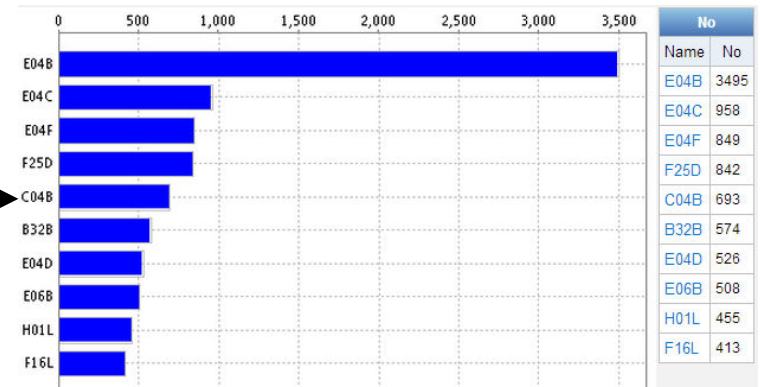

→ Статистический анализ всех найденных документов, или...

# Пакеты документов


Sort by: Pub Date Desc View All List Length 10

No	Ctr	Title	PubDate	Int. Class	Appl No	Applicant	Inventor
1.	WO	WO/2013/113703 - HEATING DEVICE, USE OF SUCH A HEATING DEVICE AND PRODUCTION METHOD	08.08.2013	H05B 3/14	PCTEP2013/051695	E.G.O. ELEKTRO-GERATEBAU GMBH	HORMSMANN, Karl, Heinz
<p>A heating device for an electrical household appliance has a large-area heating element or substantially comprises such a large-area heating element, wherein the heating element has electrical connections. The heating element comprises a material mixture of vermiculite and electrically conductive components such as metal particles, carbon black particles or graphite particles, and others. In this case, the electrically conductive components are distributed substantially over the entire heating element, advantageously uniformly. Thus, a heating device is provided which can be used simultaneously as thermal insulation and can form, for example, an inner rear wall of a refrigerator for a defrost function.</p>							
2.	WO	WO/2013/115969 - SYSTEM FOR CONTROLLING TEMPERATURE OF SUBSEA EQUIPMENT	08.08.2013	G05D 23/00	PCTUS2012/063758	CAMERON INTERNATIONAL CORPORATION	MCUGH, Edmund Peter
<p>An underwater assembly includes a flow control device and an actuator coupled to the flow control device, where the actuator is configured to actuate the flow control device. The underwater assembly further includes an insulator housing surrounding the flow control device and the actuator, where the housing is configured to retain heat. The underwater assembly also includes a thermal control system comprising a heat exchanger configured to control a temperature of the actuator.</p>							
3.	WO	WO/2013/114861 - INFRARED SENSOR	08.08.2013	G01J 1/02	PCTJP2013/000467	MITSUBISHI MATERIALS CORPORATION	TARI, Kazuyoshi
<p>Provided is an infrared sensor with which highly precise temperature measurement of a subject to be measured is possible without requiring a thermal balance even when lead lines are connected to one side. The infrared sensor comprises: an insulation film (2); a first heat-sensitive element (3A) and a second heat-sensitive element (3B) which are disposed on one face of the insulation film; a first wiring membrane (4A) which is connected to the first heat-sensitive element and a second wiring membrane (4B) which is connected to the second heat-sensitive element; said wiring membranes being formed on one face of the insulation film; an infrared reflecting membrane (5) which is disposed on the other face of the insulation film, opposite to the second heat-sensitive element; a plurality of terminal electrodes (6) which are disposed on the same end part side of the insulation film and which are connected to the corresponding first wiring membrane and second wiring membrane; and a thermal resistance adjustment membrane (7) which is disposed on the other face of the insulation film, which is in opposition to at least a portion of the longer of the first wiring membrane and the second wiring membrane in wiring distance from the terminal electrodes, and which is formed of a material with greater heat dissipation than the insulation film.</p>							

→ поиск документов (поиск по ключевым словам)

# Отдельные документы



No.	Cr.	PubDate	Title	PubDate	Int. Class.	Appl. No.	Applicant	Inventor
1.	WO	WO/2013/113703	HEATING DEVICE, USE OF SUCH A HEATING DEVICE AND PRODUCTION METHOD	08.08.2013	H05B 3/14	PCTEP2013/051695	E.G.O. ELEKTRO-GERATEBAU GMBH	HORMSMANN, Karl, Heinz
<p>A heating device for an electrical <b>household</b> appliance has a large-area heating element or substantially comprises such a large-area heating element, wherein the heating element has electrical connections. The heating element comprises a material mixture of vermiculite and electrically conductive components such as metal particles, carbon black particles or graphite particles, and others. In this case, the electrically conductive components are distributed substantially over the entire heating element, advantageously uniformly. Thus, a heating device is provided which can be used simultaneously as <b>thermal insulation</b> and can form, for example, an inner rear wall of a refrigerator for a defrost function.</p>								
2.	WO	WO/2013/115969	SYSTEM FOR CONTROLLING TEMPERATURE OF SUBSEA EQUIPMENT	08.08.2013	G05D 23/00	PCTUS2012/063758	CAMERON INTERNATIONAL CORPORATION	MCULUGH, Edmund Peter
<p>An underwater assembly includes a flow control device and an actuator coupled to the flow control device, where the actuator is configured to actuate the flow control device. The underwater assembly further includes an insulator <b>housing</b> surrounding the flow control device and the actuator, where the <b>housing</b> is configured to retain <b>heat</b>. The underwater assembly also includes a thermal control system comprising a heat exchanger configured to control a temperature of the actuator.</p>								
3.	WO	WO/2013/114861	INFRARED SENSOR	08.08.2013	G01J 1/02	PCTJP2013/000467	MITSUBISHI MATERIALS CORPORATION	TARI, Kazuyoshi
<p>Provided is an infrared sensor with which highly precise temperature measurement of a subject to be measured is possible without reacting a thermal balance even when lead lines are connected to one side. The infrared sensor comprises: an <b>insulation</b> film (2); a first <b>heat</b>-sensitive element (3A) and a second <b>heat</b>-sensitive element (3B) which are disposed on one face of the insulation film; a first wiring membrane (4A) which is connected to the first <b>heat</b>-sensitive element and a second wiring membrane (4B) which is connected to the second <b>heat</b>-sensitive element; said wiring membranes being formed on one face of the insulation film; an infrared reflecting membrane (5) which is disposed on the other face of the <b>insulation</b> film, opposite to the second <b>heat</b>-sensitive element; a plurality of terminal electrodes (6) which are disposed on the same end part side of the insulation film and which are connected to the corresponding first wiring membrane and second wiring membrane; and a thermal resistance adjustment membrane (7) which is disposed on the other face of the insulation film, which is in opposition to at least a portion of the longer of the first wiring membrane and the second wiring membrane in wiring distance from the terminal electrodes, and which is formed of a material with greater <b>heat</b> dissipation than the <b>insulation</b> film.</p>								

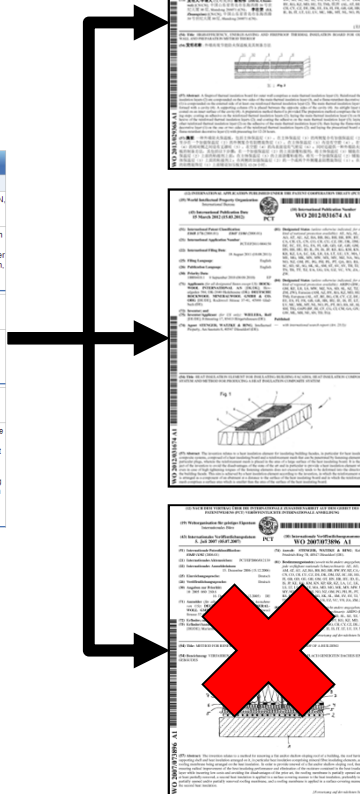

→ Отбор соответствующих документов

# Пакеты документов










No. Clr	Title	PubDate	Int. Class.	Appl. No.	Applicant	Inventor
1.	WO/2013/113703 - HEATING DEVICE, USE OF SUCH A HEATING DEVICE AND PRODUCTION METHOD	08.08.2013	H05B 3/14	PCTEP2013/051695	E.G.O. ELEKTRO-GERATEBAU GmbH	HORMSMANN, Karl, Heinz
<p>A heating device for an electrical <b>household</b> appliance has a large-area heating element or substantially comprises such a large-area heating element, wherein the heating element has electrical connections. The heating element comprises a material mixture of vermiculite and electrically conductive components such as metal particles, carbon black particles or graphite particles, and others. In this case, the electrically conductive components are distributed substantially over the entire heating element, advantageously uniformly. Thus, a heating device is provided which can be used simultaneously as <b>thermal insulation</b> and can form, for example, an inner rear wall of a refrigerator for a defrost function.</p>						
2.	WO/2013/115863 - SYSTEM FOR CONTROLLING TEMPERATURE OF SUBSEA EQUIPMENT	08.08.2013	G05D 23/00	PCTUS2012/063758	CAMERON INTERNATIONAL CORPORATION	MCULUGH, Edmund Peter
<p>An underwater assembly includes a flow control device and an actuator coupled to the flow control device. Where the actuator is configured to actuate the flow control device. The underwater assembly further includes an insulator <b>housing</b> surrounding the flow control device and the actuator, where the <b>housing</b> is configured to retain <b>heat</b>. The underwater assembly also includes a thermal control system comprising a heat exchanger configured to control a temperature of the actuator.</p>						
3.	WO/2013/114861 - INFRARED SENSOR	08.08.2013	G01J 1/02	PCTJP2013/000467	MITSUBISHI MATERIALS CORPORATION	TARI, Kazuyoshi
<p>Provided is an infrared sensor with which highly precise temperature measurement of a subject is possible without exerting a thermal balance even when lead lines are connected to one side. The infrared sensor comprises: an <b>insulation film</b> (2); a first <b>heat-sensitive element</b> (3A) and a second <b>heat-sensitive element</b> (3B) which are disposed on one face of the insulation film; a first <b>wiring membrane</b> (4A) which is connected to the first heat-sensitive element and a second <b>wiring membrane</b> (4B) which is connected to the second heat-sensitive element; said <b>wiring membranes</b> being formed on one face of the insulation film; an <b>infrared reflecting membrane</b> (5) which is disposed on the other face of the <b>insulation film</b>, opposite to the second <b>heat-sensitive element</b>; a plurality of <b>terminal electrodes</b> (6) which are disposed on the same end part side of the insulation film and which are connected to the corresponding first <b>wiring membrane</b> and second <b>wiring membrane</b>; and a <b>thermal resistance adjustment membrane</b> (7) which is disposed on the other face of the insulation film, which is in opposition to at least a portion of the longer of the first <b>wiring membrane</b> and the second <b>wiring membrane</b> in <b>wiring distance</b> from the terminal electrodes, and which is formed of a material with greater <b>heat dissipation</b> than the <b>insulation film</b>.</p>						

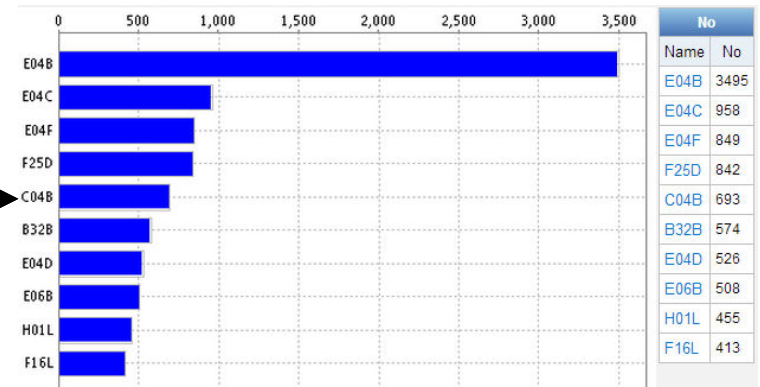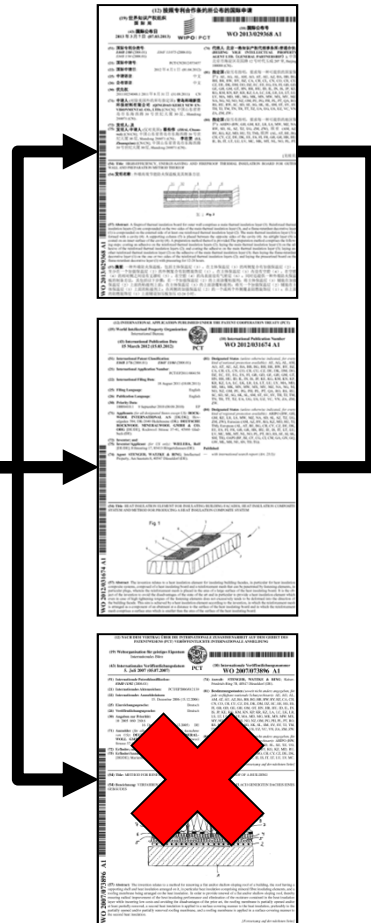

→ Статический анализ релевантных документов

# Публикация классификации (МПК)


## Схема

Scheme	RCL	Compilation	Catchwords	Corrigendum
E				
<b>SECTION E — FIXED CONSTRUCTIONS</b>				
E04				
<b>BUILDING</b>				
 E04B				
<b>GENERAL BUILDING CONSTRUCTIONS; WALLS, e.g. PARTITIONS; ROOFS; FLOORS; CEILINGS; INSULATION OR OTHER PROTECTION OF BUILDINGS</b> (border constructions of openings in walls, floors, or ceilings E06B 1/00)				
Note(s)				
1. This subclass <u>covers</u> working methods used in constructing new buildings and analogous working methods on existing buildings. Other working methods on existing buildings, except those for insulating, are classified in group E04G 23/00. [5]				
2. In this subclass, the following term is used with the meaning indicated:				
<ul style="list-style-type: none"> <li>• "ceiling" includes all the finishing <b>material</b> concealing the underside of the load-carrying ceiling structure or roof structure. [4]</li> </ul>				
 E04B 1/00				
<b>Constructions in general; Structures which are not restricted either to walls, e.g. partitions, or floors or ceilings or roofs</b> (scaffolds, shutterings E04G; structures specially adapted for buildings for special purposes, general layout of buildings, e.g. modular co-ordination, E04H; the particular parts of buildings, <u>see</u> the relevant groups for those parts)				
 E04B 1/02				
• Structures consisting primarily of load-supporting, block-shaped or slab-shaped elements (E04B 1/32-E04B 1/36 take precedence)				
 E04B 1/04				
• the elements consisting of concrete, e.g. reinforced concrete, or other stone-like <b>material</b>				
 E04B 1/06				
• • the elements being prestressed				
 E04B 1/08				
• • the elements consisting of metal				
 E04B 1/10				
• • the elements consisting of wood				
 E04B 1/12				
• • the elements consisting of other <b>material</b>				
 E04B 1/14				
• • the elements being composed of two or more <b>materials</b> (of reinforced concrete E04B 1/04)				

## Ключевые слова

Scheme	RCL	Compilation	Catchwords	Corrigendum
<b>A</b>				
ABACUSES	-	ADHESION		
ADHESIVE(S)	-	ALKALI METALS		
ALKALINE EARTH METALS	-	ANEMOMETERS		
ANEROID	-	ANTI-TOXINS		
ANVILS	-	ASPIRATOR		
ASSEMBLIES	-	AWNS		
AXES	-	AZOXY		
<b>B</b>				
BABIES	-	BARIUM		
BARK	-	BEAUTY		
BECKMANN	-	BISMUTH		
BISULFITES	-	BOLT(S)		
BOMBS	-	BRASSIERES		
BRAZERS	-	BUILDING(S)		
BULBS	-	BUZZERS		
<b>C</b>				
CABINET(S)	-	CANDIES		
CANDLE(S)	-	CARCASES, CARCASSES		
CARCINOGENS	-	CATARACT(S)		
CATATHERMOMETERS	-	CHALK		
CHALKERS	-	CHIPS		
CHIROMANTIC	-	CIRCUMCISION		
CIRCUS(ES)	-	COASTS		
COAT(S)	-	COLOURING, COLORING		
<b>M</b>				
MACADAMISED, MACADAMIZED	-	MARBLE(S)		
MARCHING	-	MEDICINE(S)		
MEERSCHAUM	-	MICROPHONES		
MICROPROCESSORS	-	MONOLINE		
MONO-RAIL(S)	-	MUSCLES		
MUSEUMS	-	MYOGRAPHS		
<b>N</b>				
NACELLES	-	NIPPERS		
NIPPLES	-	NUTMEG		
<b>O</b>				
OAKUM	-	ORNITHOPTERS		
ORRERIES	-	OXYGEN		
OXYKETONE	-	OZOTYPY		
<b>P</b>				
PACKAGES	-	PARCHMENT		
PARING	-	PEELING		
PEENING	-	PEWTER		
PFBC [= pressurised fluidised bed combustion]	-	PICKLING		
PICK-UP(S)	-	PLACARDS		
PLACKETS	-	POACHING		
POCKET(S)	-	POLYUREAS		
POLYURETHANE(S)	-	PRALINES		
PRASEODYMIUM	-	PROPELLERS		
PROPELLING	-	PURSES		

# Классификация: Схема (МПК)

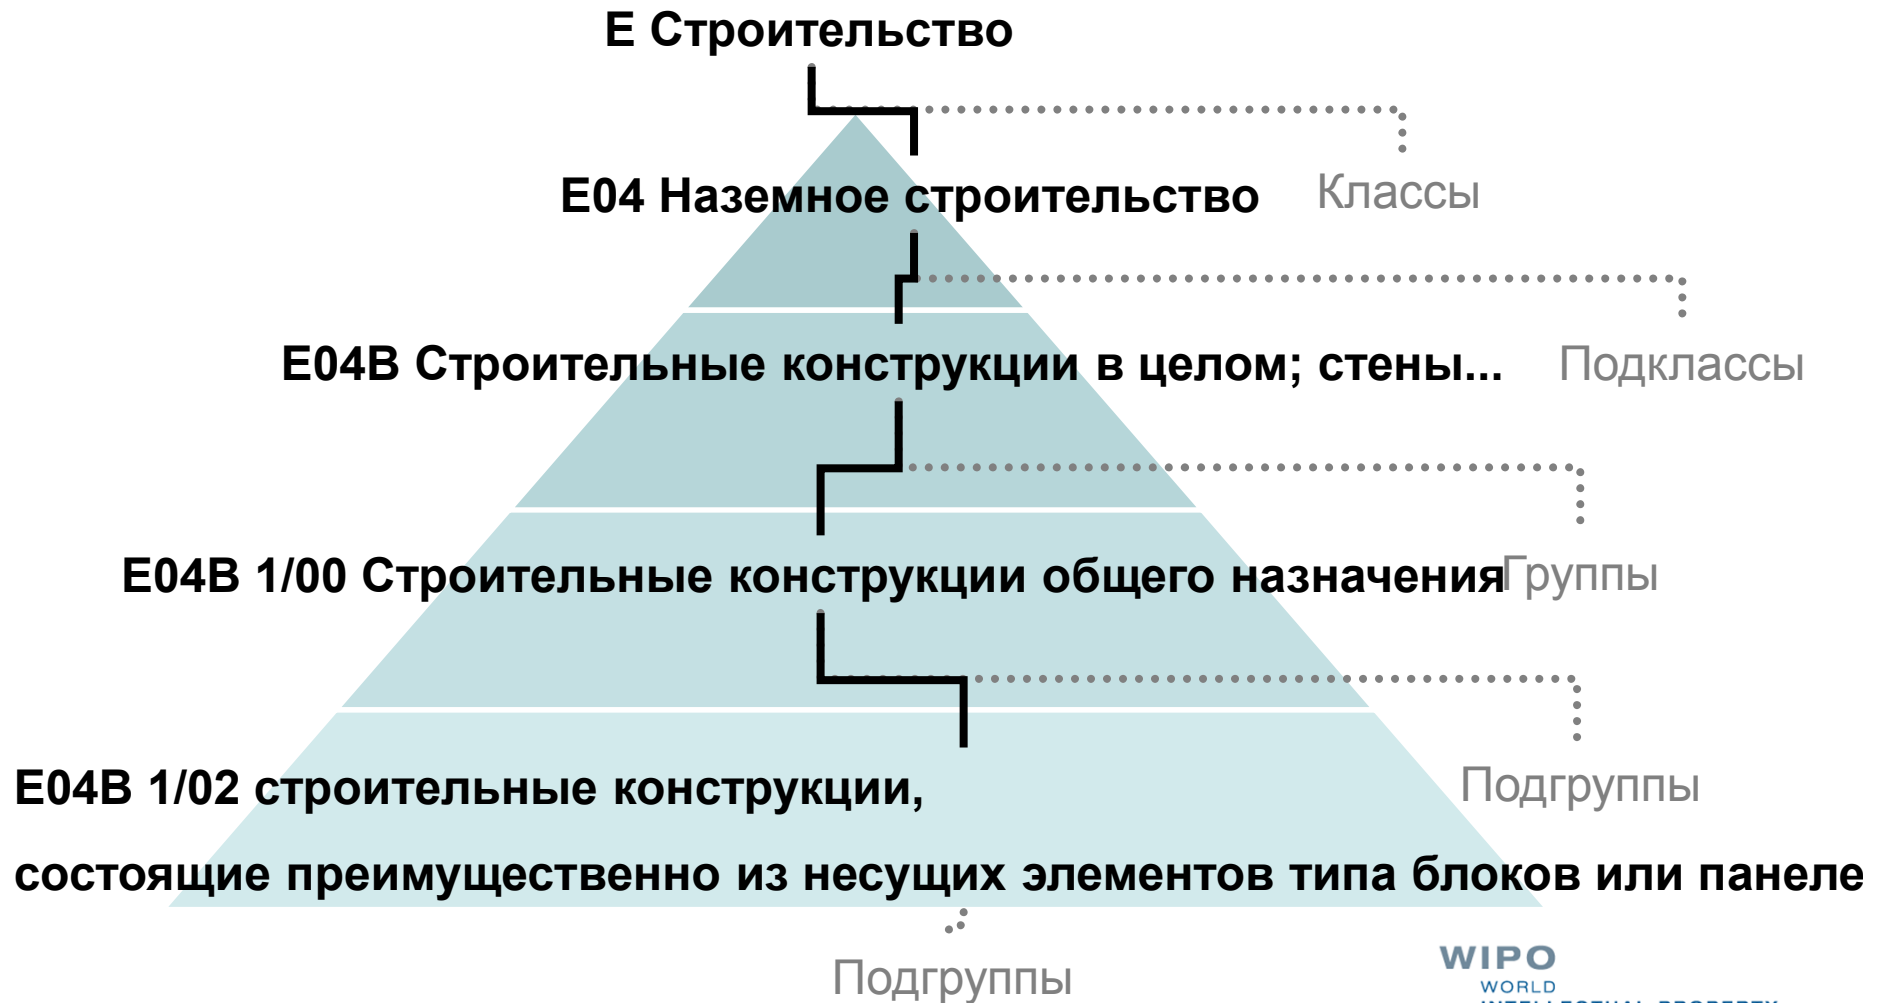



# Классификация: Схема (МПК)

SECTION A — HUMAN NECESSITIES

SECTION B — PERFORMING OPERATIONS; TRANSPORTING

SECTION C — CHEMISTRY; METALLURGY

SECTION D — TEXTILES; PAPER

SECTION E — FIXED CONSTRUCTIONS

SECTION F — MECHANICAL ENGINEERING; LIGHTING;  
HEATING; WEAPONS; BLASTING

SECTION G — PHYSICS

SECTION H — ELECTRICITY

→ Определить соответствующий раздел (или ряд разделов)

# Классификация: Схема (МПК)

SECTION A — HUMAN NECESSITIES

SECTION B — PERFORMING OPERATIONS; TRANSPORTING

SECTION C — CHEMISTRY; METALLURGY

SECTION D — TEXTILES; PAPER

SECTION E — FIXED CONSTRUCTIONS

SECTION F — MECHANICAL ENGINEERING; LIGHTING;  
HEATING; WEAPONS; BLASTING

SECTION G — PHYSICS

SECTION H — ELECTRICITY

E01 CONSTRUCTION OF ROADS, RAILWAYS, OR BRIDGES

E02 HYDRAULIC ENGINEERING; FOUNDATIONS; SOIL-SHIFTING

E03 WATER SUPPLY; SEWERAGE

E04 BUILDING


E05 LOCKS; KEYS; WINDOW OR DOOR FITTINGS; SAFES



→ Определить соответствующий класс (или ряд классов)

# Классификация: Схема (МПК)

SECTION A — HUMAN NECESSITIES  
SECTION B — PERFORMING OPERATIONS; TRANSPORTING  
SECTION C — CHEMISTRY; METALLURGY  
SECTION D — TEXTILES; PAPER  
SECTION E — FIXED CONSTRUCTIONS  
SECTION F — MECHANICAL ENGINEERING; LIGHTING;  
HEATING; WEAPONS; BLASTING  
SECTION G — PHYSICS  
SECTION H — ELECTRICITY




E04B	<b>GENERAL BUILDING CONSTRUCTIONS; WALLS, e.g. PARTITIONS; ROOFS; FLOORS; CEILINGS; INSULATION OR OTHER PROTECTION OF BUILDINGS</b> (border constructions of openings in walls, floors, or ceilings E06B 1/00)
	Note(s) 1. This subclass covers working methods used in constructing new buildings and analogous working methods on existing buildings. Other working methods on existing buildings, except those for insulating, are classified in group E04G 23/00. [5] 2. In this subclass, the following term is used with the meaning indicated: <ul style="list-style-type: none"><li>• "ceiling" includes all the finishing material concealing the underside of the load-carrying ceiling structure or roof structure. [4]</li></ul>
E04C	<b>STRUCTURAL ELEMENTS; BUILDING MATERIALS</b> (for bridges E01D; specially designed for insulation or other protection E04B; elements used as building aids E04G; for mining E21; for tunnels E21D; structural elements with broader range of application than for building engineering F16, particularly F16S)
E04D	<b>ROOF COVERINGS; SKY-LIGHTS; GUTTERS; ROOF-WORKING TOOLS</b> (coverings of outer walls by plaster or other porous material E04F 13/00)

→ Определить соответствующий подкласс (или ряд подклассов)

# Классификация: Схема (МПК)

- SECTION A — HUMAN NECESSITIES
- SECTION B — PERFORMING OPERATIONS; TRANSPORTING
- SECTION C — CHEMISTRY; METALLURGY
- SECTION D — TEXTILES; PAPER
- SECTION E — FIXED CONSTRUCTIONS
- SECTION F — MECHANICAL ENGINEERING; LIGHTING; HEATING; WEAPONS; BLASTING
- SECTION G — PHYSICS
- SECTION H — ELECTRICITY



**E04B GENERAL BUILDING CONSTRUCTIONS; WALLS, e.g. PARTITIONS; ROOFS; FLOORS; CEILINGS; INSULATION OR OTHER PROTECTION OF BUILDINGS** (border constructions of openings in walls, floors, or ceilings E06B 1/00)

Note(s)

1. This subclass covers working methods used in constructing new buildings and analogous working methods on existing buildings. Other working methods on existing buildings, except those for insulating, are classified in group E04G 23/00. [5]
2. In this subclass, the following term is used with the meaning indicated:
  - "ceiling" includes all the finishing material concealing the underside of the load-carrying ceiling structure or roof structure. [4]

**E04C STRUCTURAL ELEMENTS; BUILDING MATERIALS** (for bridges E01D; specially designed for insulation or other protection E04B; elements used as building aids E04G; for mining E21; for tunnels E21D; structural elements with broader range of application than for building engineering F16, particularly F16S)

**E04D ROOF COVERINGS; SKY-LIGHTS; GUTTERS; ROOF-WORKING TOOLS** (coverings of outer walls by plaster or other porous material E04F 13/00)



→ Продолжить по ситуации...

# Классификация: Ключевые слова (МПК)

## A

ABACUSES	-	ADHESION
ADHESIVE(S)	-	ALKALI METALS
ALKALINE EARTH METALS	-	ANEMOMETERS
ANEROID	-	ANTI-TOXINS
ANVILS	-	ASPIRATOR
ASSEMBLIES	-	AWNS
AXES	-	AZOXY

## B

BABIES	-	BARIUM
BARK	-	BEAUTY
BECKMANN	-	BISMUTH
BISULFITES	-	BOLT(S)
BOMBS	-	BRASSIERES
BRAZIER(S)	-	BUILDING(S)
BULBS	-	BUZZERS

## C

CABINET(S)	-	CANDIES
CANDLE(S)	-	CARCASES, CARCASSES
CARCINOGENS	-	CATARACT(S)
CATATHERMOMETERS	-	CHALK
CHALKERS	-	CHIPS
CHIROMANTIC	-	CIRCUMCISION
CIRCUS(E(S))	-	COASTS
COAT(S)	-	COLOURING, COLORING
COLTERS	-	CONDIMENTS
CONDITIONING	-	COPROSTANES
COPS	-	COVERLETS
COVERS	-	CRUETS
CRUMB TRAYS	-	CVD [= chemical vapour deposition]
CYANAMIDE	-	CYSTOSCOPES

→ Подберите подходящее стартовое ключевое слово

# Классификация: Ключевые слова (МПК)

A	
ABACUSES	- ADHESION
ADHESIVE(S)	- ALKALI METALS
ALKALINE EARTH METALS	- ANEMOMETERS
ANEROID	- ANTI-TOXINS
ANVILS	- ASPIRATOR
ASSEMBLIES	- AWNS
AXES	- AZOXY

B	
BABIES	- BARIUM
BARK	- BEAUTY
BECKMANN	- BISMUTH
BISULFITES	- BOLT(S)
BOMBS	- BRASSIERES
BRAZIER(S)	- BUILDING(S)
BULBS	- BUZZERS

C	
CABINET(S)	- CANDIES
CANDLE(S)	- CARCASES, CARCASSES
CARCINOGENS	- CATARACT(S)
CATATHERMOMETERS	- CHALK
CHALKERS	- CHIPS
CHIROMANTIC	- CIRCUMCISION
CIRCUS(ES)	- COASTS
COAT(S)	- COLOURING, COLORING
COLTERS	- CONDIMENTS
CONDITIONING	- COPROSTANES
COPS	- COVERLETS
COVERS	- CRUETS
CRUMB TRAYS	- CVD [= chemical vapour deposition]
CYANAMIDE	- CYSTOSCOPES

Scheme	RCL	Compilation	Catchwords	Corrigendum
<b>BUILDING(S) E04</b>				
(1) kinds of BUILDING(S); features of BUILDING(S)				
air-conditioning or ventilation of BUILDING(S) F24F				
BUILDING(S) for particular purposes E04H				
devices for rescuing persons from BUILDING(S) A62B 1/00-A62B 5/00				
floating BUILDING(S) B63B 35/44				
foundations inserted underneath existing BUILDING(S) E02D 27/48				
inflatable tent or canopy-like BUILDING(S) E04H 15/20				
ladders attachable to BUILDING(S) E06C 1/34				
ladders fixed permanently to BUILDING(S) E06C 9/00				
lifts associated with BUILDING(S) B66B 9/00				
structures of BUILDING(S) E04B				
subaqueous BUILDING(S) E02D 29/00, E21D				
(2) construction of BUILDING(S)				
BUILDING(S) implements E04G				
cranes for erecting BUILDING(S) B66C				

→ Перейти к соответствующему ключевому слову

# Подсказка!

- Следите за ссылками и примечаниями!

Constructions in general; Structures which are not restricted either to walls, e.g. partitions, or floors or ceilings or roofs (scaffolds, shutterings E04G; structures specially adapted for buildings for special purposes, general layout of buildings, e.g. modular co-ordination, E04H; the particular parts of buildings, see the relevant groups for those parts)

- Structures consisting primarily of load-supporting, block-shaped or slab-shaped elements (E04B 1/32-E04B 1/36 take precedence)
- the elements consisting of concrete, e.g. reinforced concrete, or other stone-like material

# Подсказка!

- Следите за ссылками и примечаниями!

Constructions in general; Structures which are not restricted either to walls, e.g. partitions, or floors or ceilings or roofs (scaffolds, shutterings E04G) structures specially adapted for buildings for special purposes, general layout of buildings, e.g. modular co-ordination, E04H; the particular parts of buildings, see the relevant groups for those parts)

- Structures consisting primarily of load-supporting, block-shaped or slab-shaped elements (E04B 1/32-E04B 1/36 take precedence)
- the elements consisting of concrete, e.g. reinforced concrete, or other stone-like material



# Подсказка!

- Следите за ссылками и примечаниями!

Constructions in general; Structures which are not restricted either to walls, e.g. partitions, or floors or ceilings or roofs (scaffolds, shutterings E04G; structures specially adapted for buildings for special purposes, general layout of buildings, e.g. modular co-ordination, E04H; the particular parts of buildings, see the relevant groups for those parts)

- Structures consisting primarily of load-supporting, block-shaped or slab-shaped elements **E04B 1/32-E04B 1/36 take precedence**
- the elements consisting of concrete, e.g. reinforced concrete, or other stone-like material

# Сценарий

- Компания по производству строительных материалов обратилась к вам с просьбой определить технологии, связанные с теплоизоляцией домов.

# Запрос

- **thermal (тепловая)**
- **insulation (изоляция)**
- **house (дом)**

# Запрос

- **thermal**: heat (тепло), temperature (температура)
- **insulation**: insulate (изолировать)
- **house**: building (здание)

# Запрос

- (thermal OR heat OR temperature)
- (insulat\*)
- (house\* OR housing\* OR building\*)

# Запрос

- (thermal OR heat OR temperature) NEAR (insulat\*)

# Запрос

- (thermal OR heat OR temperature) NEAR (insulat\*) **AND**  
**(house\* OR housing\* OR building\*)**

# Запрос

- ((thermal OR heat OR temperature) NEAR (insulat\*))  
AND (house\* OR housing\* OR building\*)



# Запрос

- ((thermal OR heat OR temperature) NEAR (insulat\*))  
AND (house\* OR housing\* OR building\*)

# Поиск (PATENTSCOPE)



**PATENTSCOPE**

Mobile | Deutsch | Español | Français | 日本語 | 한국어 | Português | Русский | 中文 |

Search International and National Patent Collections

WORLD INTELLECTUAL PROPERTY ORGANIZATION

Search | Browse | Translate | Options | News | Login | Help

Home > IP Services > PATENTSCOPE

Simple Search

Using PATENTSCOPE you can search 30 million patent documents including 2.2 million published international patent applications (PCT). Detailed coverage information can be found here (->)

Front Page



(((thermal OR heat OR temperature) NEAR (insulat\*)) AND (house\* OR housi



Office: All

Search

# Результаты (PATENTSCOPE)

 **PATENTSCOPE** Mobile | Deutsch | Español | Français | 日本語 | 한국어 | Português | Русский | 中文

Search International and National Patent Collections

WORLD INTELLECTUAL PROPERTY ORGANIZATION

Search | Browse | Translate | Options | News | Login | Help

Home > IP Services > PATENTSCOPE

Results 1-10 of 13,109 for Criteria:FP:(((thermal OR heat OR temperature) NEAR (insulat\*)) AND (house\* OR housing\* OR building\*))  
Office(s):all Language:EN Stemming: true

prev 1 2 3 4 5 6 7 8 9 10 next Page:1 / 1311 Go >

Refine Search  Search  

**Analysis** »

Sort by: Pub Date Desc View All List Length 10

No	Ctr	Title	PubDate	Int.Class	Appl.No	Applicant	Inventor
1.	WO	WO/2013/113703 - HEATING DEVICE, USE OF SUCH A HEATING DEVICE AND PRODUCTION METHOD	08.08.2013	H05B 3/14	PCT/EP2013/051695	E.G.O. ELEKTRO-GERÄTEBAU GMBH	HORSMANN, Karl, Heinz

A heating device for an electrical household appliance has a large-area heating element or substantially comprises such a large-area heating element, wherein the heating element has electrical connections. The heating element comprises a material mixture of vermiculite and electrically conductive components such as metal particles, carbon black particles or graphite particles, and binders. In this case, the electrically conductive components are distributed substantially over the entire heating element, advantageously uniformly. Thus, a heating device is provided which can be used simultaneously as thermal insulation and can form, for example, an inner rear wall of a refrigerator for a defrost function.

# Результаты (PATENTSCOPE)

**WIPO**  **PATENTSCOPE** Mobile | Deutsch | Español | Français | 日本語 | 한국어 | Português | Русский | 中文

Search International and National Patent Collections

WORLD INTELLECTUAL PROPERTY ORGANIZATION

Search | Browse | Translate | Options | News | Login | Help

Home > IP Services > PATENTSCOPE

Results 1-10 of 13,109 for Criteria:FP:(((thermal OR heat OR temperature) NEAR (insulat\*)) AND (house\* OR housing\* OR building\*))  
Office(s):all Language:EN Stemming: true

prev 1 2 3 4 5 6 7 8 9 10 next Page: 1 / 1311 Go >

Refine Search  Search RSS 

**Analysis**

Sort by: **Relevance** (selected) | Pub Date Desc | View: All | List Length: 10

No	Ctr	Pub Date Desc	Title	PubDate	Int. Class	Appl.No	Applicant	Inventor
1.	WO	Pub Date Asc App Date Desc App Date Asc	HEATING DEVICE, USE OF SUCH A HEATING FUNCTION METHOD	08.08.2013	H05B 3/14	PCT/EP2013/051695	E.G.O. ELEKTRO- GERÄTEBAU GMBH	HORSMANN, Karl, Heinz

A heating device for an electrical household appliance has a large-area heating element or substantially comprises such a large-area heating element, wherein the heating element has electrical connections. The heating element comprises a material mixture of vermiculite and electrically conductive components such as metal particles, carbon black particles or graphite particles, and binders. In this case, the electrically conductive components are distributed substantially over the entire heating element, advantageously uniformly. Thus, a heating device is provided which can be used simultaneously as thermal insulation and can form, for example, an inner rear wall of a refrigerator for a defrost function.



# Результаты (PATENTSCOPE)

Sort by: Relevance View All List Length 10							
No	Ctr	Title	PubDate	Int. Class	Appl.No	Applicant	Inventor
1.	KR	1020060100522 - HOLLOW THERMAL INSULATING PLYWOOD, A MOLD AND A MOLDING APPARATUS FOR MANUFACTURING THE HOLLOW THERMAL INSULATING PLYWOOD AND A MANUFACTURING METHOD THEREOF, FOR REDUCING WEIGHT AND INCREASING RIGIDITY	21.09.2006	E04B 1/80	1020050022082	DOOWON C&C CO., LTD.	LEE, KUY SEOP
<p>PURPOSE: A hollow thermal insulating plywood, a mold and a molding apparatus for manufacturing the hollow thermal insulating plywood, and a manufacturing method thereof are provided to decrease the weight of the plywood by forming holes, and to use the plywood as interior or exterior panels of a building by increasing rigidity, thermal insulation effect and fire resistance.</p> <p>CONSTITUTION: A hollow thermal insulating plywood(1) is made of thermal insulation material, and composed of two thermal insulation panels(2). Plural grooves are formed in the thermal insulation panel, and holes(3) are formed by facing the grooves of the thermal insulation panels in contacting the thermal insulation panels to each other. The hollow thermal insulating plywood is manufactured by contacting and fixing the thermal insulation panels. A mold for manufacturing the hollow thermal insulating plywood includes an upper mold with plural groove forming projections, a forming space containing thermal insulation powder, and a lower mold pressed by the upper mold to form the thermal insulation panel.</p> <p>© KIPO 2006</p>							
2.	RU	02357044 - HEAT INSULATED FOUNDATION	27.05.2009	E02D 27/35	2007104429/03		Лушников Владимир Вениаминович (RU)
<p>FIELD: construction. SUBSTANCE: invention is related to construction, namely to erection of buildings and structures on freezing heaving soils. Foundation on freezing soil includes rigid body comprising foot and wall, with gasket from the side of foot inverted to soil and made of heat insulation material, for instance from foam polystyrene, and also additional heat insulation material installed outside foundation limits. Upper edge of additional heat insulation material is pulled from the side of foundation external edge in the form of broken inserts via rigid body of foundation and is connected to additional heat insulator of opposite external edge of foundation. Pressure on soil in foundation foot is accepted as not higher than value of design resistance of heat insulation material to compression, and relative area of broken inserts (<math>\beta = A_{br.ins}/A_0</math>) is defined from ratio <math>\beta \leq 1 - \sigma_{max}/R</math>, where <math>A_{br.ins}</math> is area of broken inserts section, <math>m^2</math>, <math>A_0</math> is gross area of foundation section in place of inserts installation, <math>m^2</math>, <math>\sigma_{max}</math> is maximum tension in foundation material from external loads, MPa, <math>R</math> is design resistance of foundation material, MPa. Additional heat insulation material installed on external side of foundation foot is connected to heat insulation material of foundation external wall. Additional heat insulation material installed on internal side of foundation foot is connected to heat insulation material of foundation internal wall. Inserts of additional heat insulation material of foundation are connected to ceiling heat insulation material above foundation. Heat insulation material installed from external side of foundation wall is connected to heat insulation material of blind area. Heat insulation material installed on internal side of foundation wall is connected to heat insulation material of ceiling above foundation. EFFECT: provision of possibility to install foundation above design depth of heaving soil freezing, increased level of soil protection under foundation against freezing. 2 dwg</p>							




# Результаты (PATENTSCOPE)

Sort by: Relevance View All List Length 10							
No	Ctr	Title	PubDate	Int. Class	Appl.No	Applicant	Inventor
1.	KR	1020060100522 - HOLLOW THERMAL INSULATING PLYWOOD, A MOLD AND A MOLDING APPARATUS FOR MANUFACTURING THE HOLLOW THERMAL INSULATING PLYWOOD AND A MANUFACTURING METHOD THEREOF, FOR REDUCING WEIGHT AND INCREASING RIGIDITY	21.09.2006	E04B 1/80	1020050022082	DOOWON C&C CO., LTD.	LEE, KUY SEOP
<p>PURPOSE: A hollow thermal insulating plywood, a mold and a molding apparatus for manufacturing the hollow thermal insulating plywood, and a manufacturing method thereof are provided to decrease the weight of the plywood by forming holes, and to use the plywood as interior or exterior panels of a building by increasing rigidity, thermal insulation effect and fire resistance.</p> <p>CONSTITUTION: A hollow thermal insulating plywood(1) is made of thermal insulation material, and composed of two thermal insulation panels(2). Plural grooves are formed in the thermal insulation panel, and holes(3) are formed by facing the grooves of the thermal insulation panels in contacting the thermal insulation panels to each other. The hollow thermal insulating plywood is manufactured by contacting and fixing the thermal insulation panels. A mold for manufacturing the hollow thermal insulating plywood includes an upper mold with plural groove forming projections, a forming space containing thermal insulation powder, and a lower mold pressed by the upper mold to form the thermal insulation panel.</p> <p>© KIPO 2006</p>							
2.	RU	02357044 - HEAT INSULATED FOUNDATION	27.05.2009	E02D 27/35	2007104429/03		Лушников Владимир Вениаминович (RU)
<p>FIELD: construction. SUBSTANCE: invention is related to construction, namely to erection of buildings and structures on freezing heaving soils. Foundation on freezing soil includes rigid body comprising foot and wall, with gasket from the side of foot inverted to soil and made of heat insulation material, for instance from polystyrene, and also additional heat insulation material installed outside foundation limits. Upper edge of additional heat insulation material is pulled to the side of foundation external edge in the form of broken inserts via rigid body of foundation and is connected to additional heat insulator of opposite side of foundation. Pressure on soil in foundation foot is accepted as not higher than value of design resistance of heat insulation material to compression, and relative area of broken inserts (<math>\beta = A_{br.ins}/A_0</math>) is defined from ratio <math>\beta \leq 1 - \sigma_{max}/R</math>, where <math>A_{br.ins}</math> is area of broken inserts section, <math>m^2</math>, <math>A_0</math> is area of foundation section in place of inserts installation, <math>m^2</math>, <math>\sigma_{max}</math> is maximum tension in foundation material from external loads, MPa, <math>R</math> is design resistance of foundation material, MPa. Additional heat insulation material installed on external side of foundation foot is connected to heat insulation material of foundation external wall. Additional heat insulation material installed on internal side of foundation foot is connected to heat insulation material of foundation internal wall. Inserts of additional heat insulation material installed on foundation are connected to ceiling heat insulation material above foundation. Heat insulation material installed from external side of foundation wall is connected to heat insulation material of blind area. Heat insulation material installed on internal side of foundation wall is connected to heat insulation material of ceiling above foundation. EFFECT: provision of possibility to install foundation above design depth of heaving soil freezing, increased level of soil protection under foundation against freezing. 2 dwg</p>							




# Запись (PATENTSCOPE)

National Biblio. Data

Permanent Link/ Bookmark: 

**Application Number:** 1020050022082 **Application Date:** 17.03.2005  
**Publication Number:** 1020060100522 **Publication Date:** 21.09.2006  
**Publication Kind :** AKOREAN PATENT ABSTRACTS

**IPC:** E04B 1/80 

**Applicants:** DOOWON C&C CO., LTD.  
**Inventors:** LEE, KUY SEOP  
**Priority Data:**

**Title:** (EN) HOLLOW THERMAL INSULATING PLYWOOD, A MOLD AND A MOLDING APPARATUS FOR MANUFACTURING THE HOLLOW THERMAL INSULATING PLYWOOD AND A MANUFACTURING METHOD THEREOF, FOR REDUCING WEIGHT AND INCREASING RIGIDITY

**Abstract:** (EN)


PURPOSE: A hollow thermal insulating plywood, a mold and a molding apparatus for manufacturing the hollow thermal insulating plywood, and a manufacturing method thereof are provided to decrease the weight of the plywood by forming holes, and to use the plywood as interior or exterior panels of a building by increasing rigidity, thermal insulation effect and fire resistance.

CONSTITUTION: A hollow thermal insulating plywood(1) is made of thermal insulation material, and composed of two thermal insulation panels(2). Plural grooves are formed in the thermal insulation panel, and holes(3) are formed by facing the grooves of the thermal insulation panels in contacting the thermal insulation panels to each other. The hollow thermal insulating plywood is manufactured by contacting and fixing the thermal insulation panels. A mold for manufacturing the hollow thermal insulating plywood includes an upper mold with plural groove forming projections, a forming space containing thermal insulation powder, and a lower mold pressed by the upper mold to form the thermal insulation panel.


© KIPO 2006

# Запись (PATENTSCOPE)

National Biblio. Data

Permanent Link/ Bookmark: 

**Application Number:** 1020050022082 **Application Date:** 17.03.2005  
**Publication Number:** 1020060100522 **Publication Date:** 21.09.2006  
**Publication Kind :** A KOREAN PATENT ABSTRACTS

**IPC:** E04B 1/80 

**Applicants:** DOOWON C&C CO., LTD.  
**Inventors:** LEE, KUY SEOP  
**Priority Data:**

**Title:** (EN) HOLLOW THERMAL INSULATING PLYWOOD, A MOLD AND A MOLDING APPARATUS FOR MANUFACTURING THE HOLLOW THERMAL INSULATING PLYWOOD AND A MANUFACTURING METHOD THEREOF, FOR REDUCING WEIGHT AND INCREASING RIGIDITY

**Abstract:** (EN)

PURPOSE: A hollow thermal insulating plywood, a mold and a molding apparatus for manufacturing the hollow thermal insulating plywood, and a manufacturing method thereof are provided to decrease the weight of the plywood by forming holes, and to use the plywood as interior or exterior panels of a building by increasing rigidity, thermal insulation effect and fire resistance.


CONSTITUTION: A hollow thermal insulating plywood(1) is made of thermal insulation material, and composed of two thermal insulation panels(2). Plural grooves are formed in the thermal insulation panel, and holes(3) are formed by facing the grooves of the thermal insulation panels in contacting the thermal insulation panels to each other. The hollow thermal insulating plywood is manufactured by contacting and fixing the thermal insulation panels. A mold for manufacturing the hollow thermal insulating plywood includes an upper mold with plural groove forming projections, a forming space containing thermal insulation powder, and a lower mold pressed by the upper mold to form the thermal insulation panel.

© KIPO 2006




# Запись (PATENTSCOPE)

National Biblio. Data

Permanent Link/ Bookmark: 

**Application Number:** 1020050022082 **Application Date:** 17.03.2005  
**Publication Number:** 1020060100522 **Publication Date:** 21.09.2006  
**Publication Kind :** AKOREAN PATENT ABSTRACTS

**IPC:** E04B 1/80 

**Applicants:** DOOWON C&S

**Inventors:** LEE, KUY SE

**Priority Data:**

**Title:** (EN) HOLLOW  
HOLLOW THE  
INCREASING

**Abstract:** (EN)  
PURPOSE: A  
plywood, and  
plywood as in

E FIXED CONSTRUCTIONS

04 BUILDING

B GENERAL BUILDING CONSTRUCTIONS; WALLS, e.g. PARTITIONS; ROOFS; FLOORS; CEILINGS; INSULATION OR OTHER PROTECTION OF BUILDINGS

1 Constructions in general; Structures which are not restricted either to walls, e.g. partitions, or floors or ceilings or roofs

62 Insulation or other protection; Elements or use of specified material therefor

74 Heat, sound or noise insulation, absorption, or reflection; Other building methods affording favourable thermal or acoustical conditions, e.g. accumulating of heat within walls

76 specifically with respect to heat only

78 Heat insulating elements


80 slab-shaped

CONSTITUTION: A hollow thermal insulating plywood(1) is made of thermal insulation material, and composed of two thermal insulation panels(2). Plural grooves are formed in the thermal insulation panel, and holes(3) are formed by facing the grooves of the thermal insulation panels in contacting the thermal insulation panels to each other. The hollow thermal insulating plywood is manufactured by contacting and fixing the thermal insulation panels. A mold for manufacturing the hollow thermal insulating plywood includes an upper mold with plural groove forming projections, a forming space containing thermal insulation powder, and a lower mold pressed by the upper mold to form the thermal insulation panel.


© KIPO 2006

# Запись (PATENTSCOPE)

National Biblio. Data

Permanent Link/ Bookmark: 

**Application Number:** 1020050042193 **Application Date:** 19.05.2005  
**Publication Number:** 1020050054901 **Publication Date:** 10.06.2005  
**Publication Kind :** A KOREAN PATENT ABSTRACTS

**IPC:** E04B 1/78 

**Applicants:** KIM, GI TAE  
**Inventors:** KIM, GI TAE  
**Priority Data:**

**Title:** (EN) EXTERNAL HEAT INSULATION CONSTRUCTION METHOD USING A THERMAL INSULATION BOARD FORMED BY COMBINING AN EXTERIOR MATERIAL WITH A THERMAL INSULATION MATERIAL

**Abstract:** (EN)


PURPOSE: An external heat insulation construction method using a thermal insulation board is provided to efficiently insulate heat in a building, and to improve the appearance and the durability by fastening the thermal insulation board to a structure firmly with an L-shaped supporting piece and an adhesive and restricting deformation or dewing.

CONSTITUTION: A structure is cleaned in an external heat insulation construction method(S1). Plural L-shaped supporting pieces are fastened to the structure, and a thermal insulation board is attached and fixed to the structure(S2). A joint remaining bar is installed and mounted to an upper part of the thermal insulation board attached to the structure, and the L-shaped supporting piece is contacted and fastened to the upper part of the joint remaining bar and the structure(S3). The thermal insulation board is mounted to the structure repeatedly(S4), and a coating layer is formed in the front of the thermal insulation board mounted to the structure(S5). A joint is formed by charging caulking materials between the thermal insulation boards(S6).


© KIPO 2006

# Запись (PATENTSCOPE)

National Biblio. Data

Permanent Link/ Bookmark: 

**Application Number:** 1020050042193 **Application Date:** 19.05.2005  
**Publication Number:** 1020050054901 **Publication Date:** 10.06.2005  
**Publication Kind :** A KOREAN PATENT ABSTRACTS

**IPC:** **E04B 1/78** 

**Applicants:** KIM, GI TAE  
**Inventors:** KIM, GI TAE  
**Priority Data:**

**Title:** (EN) EXTERNAL HEAT INSULATION CONSTRUCTION METHOD USING A THERMAL INSULATION BOARD FORMED BY COMBINING AN EXTERIOR MATERIAL WITH A THERMAL INSULATION MATERIAL

**Abstract:** (EN)


PURPOSE: An external heat insulation construction method using a thermal insulation board is provided to efficiently insulate heat in a building, and to improve the appearance and the durability by fastening the thermal insulation board to a structure firmly with an L-shaped supporting piece and an adhesive and restricting deformation or dewing.

CONSTITUTION: A structure is cleaned in an external heat insulation construction method(S1). Plural L-shaped supporting pieces are fastened to the structure, and a thermal insulation board is attached and fixed to the structure(S2). A joint remaining bar is installed and mounted to an upper part of the thermal insulation board attached to the structure, and the L-shaped supporting piece is contacted and fastened to the upper part of the joint remaining bar and the structure(S3). The thermal insulation board is mounted to the structure repeatedly(S4), and a coating layer is formed in the front of the thermal insulation board mounted to the structure(S5). A joint is formed by charging caulking materials between the thermal insulation boards(S6).


© KIPO 2006

# Запись (PATENTSCOPE)

National Biblio. Data

Permanent Link/ Bookmark: 

**Application Number:** 1020050042193 **Application Date:** 19.05.2005  
**Publication Number:** 1020050054901 **Publication Date:** 10.06.2005  
**Publication Kind :** AKOREAN PATENT ABSTRACTS

**IPC:** E04B 1/78 

**Applicants:** KIM, GI TAE  
**Inventors:** KIM, GI TAE  
**Priority Data:**  
**Title:** (EN) EXTERNA COMBINING A  
**Abstract:** (EN) PURPOSE: An in a building, an L-shaped suppo

<b>E</b>	FIXED CONSTRUCTIONS
<b>04</b>	BUILDING
<b>B</b>	GENERAL BUILDING CONSTRUCTIONS; WALLS, e.g. PARTITIONS; ROOFS; FLOORS; CEILINGS; INSULATION OR OTHER PROTECTION OF BUILDINGS
<b>1</b>	Constructions in general; Structures which are not restricted either to walls, e.g. partitions, or floors or ceilings or roofs
<b>62</b>	Insulation or other protection; Elements or use of specified material therefor
<b>74</b>	Heat, sound or noise insulation, absorption, or reflection; Other building methods affording favourable thermal or acoustical conditions, e.g. accumulating of heat within walls
<b>76</b>	specifically with respect to heat only
<b>78</b>	Heat insulating elements

CONSTITUTION: A structure is cleaned in an external heat insulation construction method(S1). Plural L-shaped supporting pieces are fastened to the structure, and a thermal insulation board is attached and fixed to the structure(S2). A joint remaining bar is installed and mounted to an upper part of the thermal insulation board attached to the structure, and the L-shaped supporting piece is contacted and fastened to the upper part of the joint remaining bar and the structure(S3). The thermal insulation board is mounted to the structure repeatedly(S4), and a coating layer is formed in the front of the thermal insulation board mounted to the structure(S5). A joint is formed by charging caulking materials between the thermal insulation boards(S6).

© KIPO 2006

# Результаты (PATENTSCOPE)

 **PATENTSCOPE** Mobile | Deutsch | Español | Français | 日本語 | 한국어 | Português | Русский | 中文

Search International and National Patent Collections

WORLD INTELLECTUAL PROPERTY ORGANIZATION

Search | Browse | Translate | Options | News | Login | Help

Home > IP Services > PATENTSCOPE

Results 1-10 of 13,109 for Criteria:FP:(((thermal OR heat OR temperature) NEAR (insulat\*)) AND (house\* OR housing\* OR building\*))  
Office(s):all Language:EN Stemming: true

prev 1 2 3 4 5 6 7 8 9 10 next Page:1 / 1311 Go >

Refine Search  Search  

**Analysis** »

Sort by: Pub Date Desc View All List Length 10 

No	Ctr	Title	PubDate	Int.Class	Appl.No	Applicant	Inventor
1.	WO	WO/2013/113703 - HEATING DEVICE, USE OF SUCH A HEATING DEVICE AND PRODUCTION METHOD	08.08.2013	H05B 3/14 	PCT/EP2013/051695	E.G.O. ELEKTRO-GERÄTEBAU GMBH	HORSMANN, Karl, Heinz

A heating device for an electrical household appliance has a large-area heating element or substantially comprises such a large-area heating element, wherein the heating element has electrical connections. The heating element comprises a material mixture of vermiculite and electrically conductive components such as metal particles, carbon black particles or graphite particles, and binders. In this case, the electrically conductive components are distributed substantially over the entire heating element, advantageously uniformly. Thus, a heating device is provided which can be used simultaneously as thermal insulation and can form, for example, an inner rear wall of a refrigerator for a defrost function.



# Результаты (PATENTSCOPE)

 **PATENTSCOPE** Mobile | Deutsch | Español | Français | 日本語 | 한국어 | Português | Русский | 中文 |

Search International and National Patent Collections

WORLD INTELLECTUAL PROPERTY ORGANIZATION

Search | Browse | Translate | Options | News | Login | Help

Home > IP Services > PATENTSCOPE

Results 1-10 of 13,109 for Criteria:FP:(((thermal OR heat OR temperature) NEAR (insulat\*)) AND (house\* OR housing\* OR building\*))  
Office(s):all Language:EN Stemming: true

prev 1 2 3 4 5 6 7 8 9 10 next Page:1 / 1311 Go >

Refine Search  Search  

**Analysis** »

Sort by: Pub Date Desc View All List Length 10 

No	Ctr	Title	PubDate	Int.Class	Appl.No	Applicant	Inventor
1.	WO	WO/2013/113703 - HEATING DEVICE, USE OF SUCH A HEATING DEVICE AND PRODUCTION METHOD	08.08.2013	H05B 3/14 	PCT/EP2013/051695	E.G.O. ELEKTRO-GERÄTEBAU GMBH	HORSMANN, Karl, Heinz

A heating device for an electrical household appliance has a large-area heating element or substantially comprises such a large-area heating element, wherein the heating element has electrical connections. The heating element comprises a material mixture of vermiculite and electrically conductive components such as metal particles, carbon black particles or graphite particles, and binders. In this case, the electrically conductive components are distributed substantially over the entire heating element, advantageously uniformly. Thus, a heating device is provided which can be used simultaneously as thermal insulation and can form, for example, an inner rear wall of a refrigerator for a defrost function.

# Анализ результатов (PATENTSCOPE)

Analysis

Options  Table  Graph Options  bar  pie

Countries		Main IPC		Main Applicant		Main Inventor		Pub Date	
Name	No	Name	No	Name	No	Name	No	Date	No
Japan	5426	E04B	3495	SEKISUI HOUSE LTD	181	TAN SEIKICHI	43	2003	736
PCT	1868	E04C	958	MATSUSHITA ELECTRIC IND CO LTD	171	KOTANI MIKI	35	2004	742
United States	1847	E04F	849	SANYO ELECTRIC CO LTD	128	WADA HIROTAKE	33	2005	739
Russian Federation	1542	F25D	842	SEKISUI CHEM CO LTD	109	IMANISHI KOJI	30	2006	814
European Patent Office	1272	C04B	693	DAIWA HOUSE IND CO LTD	109	MATSUMOTO SETSUYA	18	2007	836
Republic of Korea	1036	B32B	574	BSH BOSCH UND SIEMENS HAUSGERÄTE GMBH	92	Энтони Коста (RU)	17	2008	736
Mexico	56	E04D	526	KANEGAFUCHI CHEM IND CO LTD	83	ISHIKAWA TAKASHI	15	2009	690
Spain	19	E06B	508	BSH BOSCH SIEMENS HAUSGERÄTE	76	TAZAKI KOJIRO	15	2010	720
South Africa	17	H01L	455	PANASONIC CORP	75	YOSHIDA SHIGEO	15	2011	627
Russian Federation (USSR data)	16	F16L	413	IG TECH RES INC	62	ELIMAKI	14	2012	478
Israel	5							2013	218
ARIPCO	2								

# Анализ результатов (PATENTSCOPE)

Analysis

Options  Table  Graph Options  bar  pie

Countries		Main IPC		Main Applicant		Main Inventor		Pub Date	
Name	No	Name	No	Name	No	Name	No	Date	No
Japan	5426	E04B	3495	SEKISUI HOUSE LTD	181	TAN SEIKICHI	43	2003	736
PCT	1868	E04C	958	MATSUSHITA ELECTRIC IND CO LTD	171	KOTANI MIKI	35	2004	742
United States	1847	E04F	849	SANYO ELECTRIC CO LTD	128	WADA HIROTAKA	33	2005	739
Russian Federation	1542	F25D	842	SEKISUI CHEM CO LTD	109	IMANISHI KOJI	30	2006	814
European Patent Office	1272	C04B	693	DAIWA HOUSE IND CO LTD	109	MATSUMOTO SETSUYA	18	2007	836
Republic of Korea	1036	B32B	574	BSH BOSCH UND SIEMENS HAUSGERÄTE GMBH	92	Энтони Коста (RU)	17	2008	736
Mexico	56	E04D	526	KANEGAFUCHI CHEM IND CO LTD	83	ISHIKAWA TAKASHI	15	2009	690
Spain	19	E06B	508	BSH BOSCH SIEMENS HAUSGERÄTE	76	TAZAKI KOJIRO	15	2010	720
South Africa	17	H01L	455	PANASONIC CORP	75	YOSHIDA SHIGEO	15	2011	627
Russian Federation (USSR data)	16	F16L	413	IG TECH RES INC	62	ELIMAKI	14	2012	478
Israel	5							2013	218
ARIPCO	2								



# Публикация классификации (МПК)

**WIPO** IP SERVICES International Patent Classification (IPC) Official Publication

WORLD INTELLECTUAL PROPERTY ORGANIZATION

IPC Home Page - Help

Version: 2013.01

Current symbol:

Go to:

Language:  English,  French,  English/French

View mode:  path,  full,  hierarchic

Standardized sequence  
 Deleted entries  
 Subclass indexes  
 Guidance Headings  
 Notes

Search:

Assistance:

Scheme	RCL	Compilation	Catchwords	Corrigendum
<a href="#">A</a>				
<a href="#">B</a>				
<a href="#">C</a>				
<a href="#">D</a>				
<a href="#">E</a>				
<a href="#">F</a>				
<a href="#">G</a>				
<a href="#">H</a>				

**SECTION A — HUMAN NECESSITIES**

**SECTION B — PERFORMING OPERATIONS; TRANSPORTING**

**SECTION C — CHEMISTRY; METALLURGY**

**SECTION D — TEXTILES; PAPER**

**SECTION E — FIXED CONSTRUCTIONS**

**SECTION F — MECHANICAL ENGINEERING; LIGHTING; HEATING; WEAPONS; BLASTING**

**SECTION G — PHYSICS**

**SECTION H — ELECTRICITY**

# Публикация классификации (МПК)

WIPO IP SERVICES International Patent Classification (IPC) Official Publication

WORLD INTELLECTUAL PROPERTY ORGANIZATION

IPC Home Page - Help

Version: 2013.01

Current symbol: [input field]

Go to: [button]

Language:  English,  French,  English/French

View mode:  path,  full,  hierarchic

Standardized sequence  
 Deleted entries  
 Subclass indexes  
 Guidance Headings  
 Notes

Search: [Terms], [Cross-references]

**Assistance**  
[Text categorization (IPCCAT)]

Scheme	RCL	Compilation	Catchwords	Corrigendum	
A					SECTION A — HUMAN NECESSITIES
B					SECTION B — PERFORMING OPERATIONS; TRANSPORTING
C					SECTION C — CHEMISTRY; METALLURGY
D					SECTION D — TEXTILES; PAPER
E					SECTION E — FIXED CONSTRUCTIONS
F					SECTION F — MECHANICAL ENGINEERING; LIGHTING; HEATING; WEAPONS; BLASTING
G					SECTION G — PHYSICS
H					SECTION H — ELECTRICITY

# Статистический анализ (IPCCAT)

The screenshot displays the IPCCAT web interface. At the top left is the WIPO logo. The main header reads "IPCCAT - Categorization Assistant in the International Patent Classification (version 2012.01)". Below this, a descriptive paragraph states: "This is a categorization assistance tool for the International Patent Classification system. It is mainly designed to help to classify patents at IPC class, subclass or main group level."

The interface features a sidebar on the left with the following sections:

- IPCCAT:**
  - Help
  - About IPCCAT
- GATEWAY TO:**
  - IPC
  - TACSY

The main content area is titled "Classification Request Form" and contains the following elements:

- A text input field for "Choose the document to categorize:" with a "Browse..." button and a "Supported formats" button.
- A text input field for "Or paste in the text below a quote from the document to categorize:" containing the query: `((thermal OR heat OR temperature) NEAR (insulat*)) AND (house* OR housing* OR building*).`
- Two dropdown menus: "Number of predictions:" set to "3" and "Classification level:" set to "SubClass".
- A "Classify" button.

At the bottom left of the sidebar, it says "Last update: 201201".

→ Не забудьте поставить точку в конце короткого запроса!

# Статистический анализ (IPCCAT)



**WIPO**

**IPCCAT - Categorization Assistant in the International Patent Classification (version 2012.01)**

This is a categorization assistance tool for the International Patent Classification system. It is mainly designed to help to classify patents at IPC class, subclass or main group level.

**IPCCAT:**  
Help  
About IPCCAT

**GATEWAY TO:**  
IPC  
TACSY

Last update: 201201

**Classification Request Form**

Choose the document to categorize:

Or paste in the text below a quote from the document to categorize:

Number of predictions:  Classification level:

→ Не забудьте поставить точку в конце короткого запроса!

# Статистический анализ (IPCCAT)

WIPO



## IPCCAT - Categorization Assistant in the International Patent Classification (version 2012.01)

### IPCCAT:

Help  
About IPCCAT

### GATEWAY TO:

IPC  
TACSY

Last update: 201201

This is a categorization assistance tool for the International Patent Classification system. It is mainly designed to help to classify patents at IPC class, subclass or main group level.

### Classification Request Form

Choose the document to categorize:

Browse...

Supported formats

Or paste in the text below a quote from the document to categorize:

((thermal OR heat OR temperature) NEAR (insulat\*)) AND (house\* OR housing\* OR building\*).

Number of predictions: 3

Classification level: SubClass

Classify

# Статистический анализ (IPCCAT)

WIPO



## IPCCAT - Categorization Assistant in the International Patent Classification (version 2012.01)

### IPCCAT:

Help  
About IPCCAT

### GATEWAY TO:

IPC  
TACSY

Last update: 201201

This is a categorization assistance tool for the International Patent Classification system. It is mainly designed to help to classify patents at IPC class, subclass or main group level.

### Classification Request Form

Choose the document to categorize:

Browse...

Supported formats

Or paste in the text below a quote from the document to categorize:

((thermal OR heat OR temperature) NEAR (insulat\*)) AND (house\* OR housing\* OR building\*).

Number of predictions: 3

Classification level: SubClass

Classify

# Результаты (IPCCAT)

## Suggested IPC Categories

Confidence <small>↑↓</small>	IPC <small>↑↓</small>	Description	Refine
★★★★★	E04B	💡	▶▶
★★★★	G08B	💡	▶▶
★★★★	A63H	💡	▶▶

# Результаты (IPCCAT)

## Suggested IPC Categories

Confidence <small>↑↓</small>	IPC <small>↑↓</small>	Description	Refine
	E04B		▶▶
	G08B		▶▶
	A63H		▶▶



# Результаты (IPCCAT)

## Suggested IPC Categories

Confidence <small>↑↓</small>	IPC <small>↑↓</small>	Description	Refine
★★★★★	E04B	💡	▶▶
★★★★	G08B	💡	▶▶
★★★★	A63H	💡	▶▶

# Результаты (IPCCAT)

## Suggested IPC Categories






Confidence <small>↑↓</small>	IPC <small>↑↓</small>	Description	Refine
★★★★★	E04B	💡	◀◀
★★★★★	E04B 1/00	💡	
★	E04B 2/00	💡	
—	E04B 7/00	💡	
★★★★★	G08B	💡	▶▶
★★★★★	A63H	💡	▶▶

# Результаты (IPCCAT)

## Suggested IPC Categories

Confidence <small>↑↓</small>	IPC <small>↑↓</small>	Description	Refine
★★★★★	E04B	💡	◀◀
★★★★★	E04B 1/00	💡	
★	E04B 2/00	💡	
—	E04B 7/00	💡	
★★★★★	G08B	💡	▶▶
★★★★★	A63H	💡	▶▶

# Классификация: Схема (МПК)

Scheme	RCL	Compilation	Catchwords
 <b>E04B 1/00</b>			<b>Constructions in general; Structures which are not restricted either to walls, e.g. partitions, or floors or ceilings or roofs</b> (scaffolds, shutterings <b>E04G</b> ; structures specially adapted for buildings for special purposes, general layout of buildings, e.g. modular co-ordination, <b>E04H</b> ; the particular parts of buildings, <u>see</u> the relevant groups for those parts)
 E04B 1/02			· Structures consisting primarily of load-supporting, block-shaped or slab-shaped elements ( <b>E04B 1/32-E04B 1/36</b> take precedence)
 E04B 1/04			· · the elements consisting of concrete, e.g. reinforced concrete, or other stone-like <b>material</b>
 E04B 1/06			· · · the elements being prestressed
 E04B 1/08			· · the elements consisting of metal

# Публикация классификации (МПК)

**WIPO** IP SERVICES International Patent Classification (IPC) Official Publication

WORLD INTELLECTUAL PROPERTY ORGANIZATION

IPC Home Page - Help

Version: 2013.01

Current symbol:

Go to:

Language:  English,  French,  English/French

View mode:  path,  full,  hierarchic

Standardized sequence,  Deleted entries,  Subclass indexes,  Guidance Headings,  Notes

Search:

Assistance:

Scheme	RCL	Compilation	Catchwords	Corrigendum
<a href="#">A</a>				
<a href="#">B</a>				
<a href="#">C</a>				
<a href="#">D</a>				
<a href="#">E</a>				
<a href="#">F</a>				
<a href="#">G</a>				
<a href="#">H</a>				

**SECTION A — HUMAN NECESSITIES**

**SECTION B — PERFORMING OPERATIONS; TRANSPORTING**

**SECTION C — CHEMISTRY; METALLURGY**

**SECTION D — TEXTILES; PAPER**

**SECTION E — FIXED CONSTRUCTIONS**

**SECTION F — MECHANICAL ENGINEERING; LIGHTING; HEATING; WEAPONS; BLASTING**

**SECTION G — PHYSICS**

**SECTION H — ELECTRICITY**

# Публикация классификации (МПК)

**WIPO** IP SERVICES International Patent Classification (IPC) Official Publication

WORLD INTELLECTUAL PROPERTY ORGANIZATION

IPC Home Page - Help

Version: 2013.01

Current symbol: [input field]

Go to: [button]

Language:  English,  French,  English/French

View mode:  path,  full,  hierarchic

Standardized sequence,  Deleted entries,  Subclass indexes,  Guidance Headings,  Notes

Search: **Terms**, Cross-references

Assistance: Text categorization (IPCCAT)

Scheme	RCL	Compilation	Catchwords	Corrigendum	
A					SECTION A — HUMAN NECESSITIES
B					SECTION B — PERFORMING OPERATIONS; TRANSPORTING
C					SECTION C — CHEMISTRY; METALLURGY
D					SECTION D — TEXTILES; PAPER
E					SECTION E — FIXED CONSTRUCTIONS
F					SECTION F — MECHANICAL ENGINEERING; LIGHTING; HEATING; WEAPONS; BLASTING
G					SECTION G — PHYSICS
H					SECTION H — ELECTRICITY

# Классификация: Положения (МПК)

Version 2013.01 - English

Word(s)

Limit to

Exclude

Scheme  Path

Definition

Catchwords

# Классификация: Положения (МПК)

Version 2013.01 - English

Word(s)

Limit to

Exclude

Scheme  Path  Definition  Catchwords

→ «Path» (Путь) включает в себя все определения на пути к определенному индексу



# Классификация: Положения (МПК)

Version 2013.01 - English

Word(s)

Limit to

Exclude

Scheme  Path  Definition  Catchwords

<div style="height: 200px;"></div>	<div style="height: 200px;"></div>	<div style="height: 200px;"></div>
------------------------------------	------------------------------------	------------------------------------

Display results

# Классификация: Положения (МПК)

Version 2013.01 - English

Word(s)

Limit to

Exclude

<input checked="" type="checkbox"/> Scheme	<input checked="" type="checkbox"/> Path	<input type="checkbox"/> Definition	<input checked="" type="checkbox"/> Catchwords
<ul style="list-style-type: none"><li>E04B 1/74</li><li>E04B 1/76</li><li>E04B 1/78</li><li>E04B 1/88</li><li>F16B</li><li>F16J</li><li>F16J 15/00</li><li>F16L</li><li>F16L 3/00</li><li>F16L 25/02</li><li>F16L 58/02</li><li>F16L 59/00</li><li>F16L 59/02</li></ul> <p>24</p>			<p>HEAT INSULATION</p> <p>2</p>
<input type="button" value="Display results"/>			

# Классификация: Положения (МПК)

Version 2013.01 - English

Word(s)














Limit to

Exclude

<input checked="" type="checkbox"/> Scheme	<input checked="" type="checkbox"/> Path	<input type="checkbox"/> Definition	<input checked="" type="checkbox"/> Catchwords
<ul style="list-style-type: none"><li><b>E04B 1/74</b></li><li>E04B 1/76</li><li>E04B 1/78</li><li>E04B 1/88</li><li>F16B</li><li>F16J</li><li>F16J 15/00</li><li>F16L</li><li>F16L 3/00</li><li>F16L 25/02</li><li>F16L 58/02</li><li>F16L 59/00</li><li>F16L 59/02</li></ul>			HEAT INSULATION
24			2

Display results

# Классификация: Схема (МПК)

Scheme	RCL	Compilation	Catchwords	Corrigendum
 E				
<b>SECTION E — FIXED CONSTRUCTIONS</b>				
 E04				
<b>BUILDING</b>				
  E04B				
<b>GENERAL BUILDING CONSTRUCTIONS; WALLS, e.g. PARTITIONS; ROOFS; FLOORS; CEILINGS; INSULATION OR OTHER PROTECTION OF BUILDINGS</b> (border constructions of openings in walls, floors, or ceilings E06B 1/00)				
Note(s)				
<ol style="list-style-type: none"> <li>This subclass <u>covers</u> working methods used in constructing new <b>buildings</b> and analogous working methods on existing <b>buildings</b>. Other working methods on existing <b>buildings</b>, except those for <b>insulating</b>, are classified in group E04G 23/00. [5]</li> <li>In this subclass, the following term is used with the meaning indicated: <ul style="list-style-type: none"> <li>"ceiling" includes all the finishing <b>material</b> concealing the underside of the load-carrying ceiling structure or roof structure. [4]</li> </ul> </li> </ol>				
 E04B 1/00				
<b>Constructions in general; Structures which are not restricted either to walls, e.g. partitions, or floors or ceilings or roofs</b> (scaffolds, shutterings E04G; structures specially adapted for <b>buildings</b> for special purposes, general layout of <b>buildings</b> , e.g. modular co-ordination, E04H; the particular parts of <b>buildings</b> , <u>see</u> the relevant groups for those parts)				
 E04B 1/62				
· <b>Insulation</b> or other protection; Elements or <b>use</b> of specified <b>material</b> therefor ( <b>chemical compositions</b> C01-C11; implements for applying <b>insulation</b> or sealings E04F 21/00; <b>buildings</b> to withstand, or to provide protection against, external undesired influences E04H 9/00; sealing pipes in walls or partitions F16L 5/02; shielding against dangerous radiation G21F; constructions of particular parts of <b>buildings</b> , <u>see</u> the relevant groups for those parts)				
 E04B 1/74				
· · Heat, sound or noise <b>insulation</b> , absorption, or reflection (forms of, or arrangements in, rooms for influencing or directing sound E04B 1/99); Other <b>building</b> methods affording favourable <b>thermal</b> or acoustical conditions, e.g. accumulating of heat within walls (fire protection E04B 1/94; elements chiefly adapted for structural purposes E04C 1/00-E04C 3/00; chiefly adapted for surface coverings E04F 13/00; as underlayers for floor coverings E04F 15/18; closures for wall or like openings E06B)				
  E04B 1/76				
· · · specifically with respect to heat only (heat <b>insulation</b> in general F16L 59/00)				
  E04B 1/82				
· · · specifically with respect to sound only (noise damping in ducts or channels E04F 17/00; noise damping in general G10K 11/16)				
  E04B 1/88				
· · · <b>insulating</b> elements for both heat and sound				

# Классификация: Положения (МПК)

Version 2013.01 - English

Word(s)

Limit to

Exclude

<input checked="" type="checkbox"/> Scheme	<input checked="" type="checkbox"/> Path	<input type="checkbox"/> Definition	<input checked="" type="checkbox"/> Catchwords
E04B 1/74 E04B 1/76 E04B 1/78 E04B 1/88 F16B F16J F16J 15/00 F16L F16L 3/00 F16L 25/02 F16L 58/02 F16L 59/00 F16L 59/02 24			HEAT <b>INSULATION</b>
			2

Display results

# Классификация: Ключевые слова (МПК)

Scheme	RCL	Compilation	Catchwords	Corrigendum
<b>INSULATION</b>				
(1) electric <b>INSULATION</b>				
<b>INSULATION</b> of cables <b>H01B</b>				
<b>INSULATION</b> of wire by covering with plastics or substances in a plastic state <b>B29C</b>				
paper for electric <b>INSULATION</b> <b>D21H 27/12</b>				
slotting out <b>INSULATION</b> between commutator segments <b>H01R 43/06</b>				
(2) thermal <b>F16L 59/00</b>				
see also <b>THERMAL</b>				
domestic heat-insulated vessels <b>A47J 41/00, B65D</b>				
<b>INSULATION</b> for roof coverings <b>E04D 13/16</b>				
<b>INSULATION</b> in building wall construction <b>E04B 2/00</b>				
<b>INSULATION</b> in buildings in general <b>E04B 1/62</b>				
<b>INSULATION</b> measures in the flooring of buildings <b>E04F 15/18</b>				
<b>INSULATION</b> of tunnels <b>E02D 29/00, E21D 9/00, E21D 11/00</b>				
<b>INSULATION</b> of windows or doors <b>E06B 3/263, E06B 3/66</b>				
laboratory heat- <b>INSULATION</b> devices <b>B01L 7/04</b>				
(3) <b>INSULATION</b> against sound waves <b>G10K 11/00</b>				
<b>INSULATION</b> of ceilings or floors <b>E04B 5/00, E04F 15/20</b>				
<b>INSULATION</b> in building structures <b>E04B 1/62</b>				
<b>INSULATION</b> of tunnels <b>E21D 11/00</b>				
<b>INSULATION</b> of walls <b>E04B 2/00</b>				
materials for <b>INSULATION</b> <b>C04B</b>				

# Классификация: Ключевые слова (МПК)

Scheme RCL Compilation **Catchwords** Corrigendum

**INSULATION**





(1) electric **INSULATION**  
**INSULATION** of cables H01B  
**INSULATION** of wire by covering with plastics or substances in a plastic state B29C  
paper for electric **INSULATION** D21H 27/12  
slitting out **INSULATION** between commutator segments H01R 43/06

(2) **thermal** F16L 59/00  
see also **THERMAL**

domestic heat-insulated vessels A47J 41/00, B65D  
**INSULATION** for roof coverings E04D 13/16  
**INSULATION** in **building** wall construction E04B 2/00  
**INSULATION** in **buildings** in general E04B 1/62  
**INSULATION** measures in the flooring of **buildings** E04F 15/18  
**INSULATION** of tunnels E02D 29/00, E21D 9/00, E21D 11/00  
**INSULATION** of windows or doors E06B 3/263, E06B 3/66  
laboratory heat-**INSULATION** devices B01L 7/04





(3) **INSULATION** against sound waves G10K 11/00  
**INSULATION** of ceilings or floors E04B 5/00, E04F 15/20  
**INSULATION** in **building** structures E04B 1/62  
**INSULATION** of tunnels E21D 11/00  
**INSULATION** of walls E04B 2/00  
materials for **INSULATION** C04B

# Классификация: Схема (МПК)

	<b>F16L 57/00</b>	<b>Protection of pipes or objects of similar shape against external or internal damage or wear</b> (supporting of pipes inside other pipes or sleeves <a href="#">F16L 7/00</a> ; used in connection with end fittings of hoses <a href="#">F16L 35/00</a> ; protection of pipes or pipe fittings against corrosion or incrustation <a href="#">F16L 58/00</a> ; protection thereof during transport <a href="#">B65D</a> , e.g. <a href="#">B65D 59/00</a> )
	<b>F16L 58/00</b>	<b>Protection of pipes or pipe fittings against corrosion or incrustation</b> (supporting of pipes inside other pipes or sleeves <a href="#">F16L 7/00</a> ; compound tubes <a href="#">F16L 9/14</a> ; cleaning pipes or tubes <a href="#">B08B 9/02</a> )
	<b>F16L 59/00</b>	<b>Thermal insulation in general</b> (heat, sound <a href="#">insulation</a> in <a href="#">buildings</a> <a href="#">E04B</a> ; heat <a href="#">insulation</a> of steam <a href="#">engines</a> <a href="#">F01B 31/08</a> ; heat <a href="#">insulation</a> in rotary piston machines or <a href="#">engines</a> <a href="#">F01C 21/06</a> ; heat <a href="#">insulation</a> of pumps <a href="#">F04C 29/04</a> ; <a href="#">thermal insulation</a> of pressure vessels <a href="#">F17C 1/12</a> ; vessels not under pressure, with provision for <a href="#">insulation</a> <a href="#">F17C 3/02</a> )
		<u><a href="#">Indexing scheme associated with groups F16L 55/26-F16L 55/48, relating to uses and applications of pigs or moles.</a></u> [6]
	<b>F16L 101/00</b>	<b>Uses</b> or applications of pigs or moles [6]



# Классификация: Схема (МПК)

	<b>F16L 57/00</b>	<b>Protection of pipes or objects of similar shape against external or internal damage or wear</b> (supporting of pipes inside other pipes or sleeves <a href="#">F16L 7/00</a> ; used in connection with end fittings of hoses <a href="#">F16L 35/00</a> ; protection of pipes or pipe fittings against corrosion or incrustation <a href="#">F16L 58/00</a> ; protection thereof during transport <a href="#">B65D</a> , e.g. <a href="#">B65D 59/00</a> )
	<b>F16L 58/00</b>	<b>Protection of pipes or pipe fittings against corrosion or incrustation</b> (supporting of pipes inside other pipes or sleeves <a href="#">F16L 7/00</a> ; compound tubes <a href="#">F16L 9/14</a> ; cleaning pipes or tubes <a href="#">B08B 9/02</a> )
	<b>F16L 59/00</b>	<b>Thermal insulation in general</b> (heat, sound <b>insulation in buildings E04B</b> ; heat <b>insulation</b> of steam engines <a href="#">F01B 31/08</a> ; heat <b>insulation</b> in rotary piston machines or engines <a href="#">F01C 21/06</a> ; heat <b>insulation</b> of pumps <a href="#">F04C 29/04</a> ; <b>thermal insulation</b> of pressure vessels <a href="#">F17C 1/12</a> ; vessels not under pressure, with provision for <b>insulation F17C 3/02</b> )
		<u><a href="#">Indexing scheme associated with groups F16L 55/26-F16L 55/48, relating to uses and applications of pigs or moles.</a></u> [6]
	<b>F16L 101/00</b>	<b>Uses</b> or applications of pigs or moles [6]

# Поиск (PATENTSCOPE)



**PATENTSCOPE**

Mobile | Deutsch | Español | Français | 日本語 | 한국어 | Português | Русский | 中文

Search International and National Patent Collections

WORLD INTELLECTUAL PROPERTY ORGANIZATION

Search | Browse | Translate | Options | News | Login | Help

Home > IP Services > PATENTSCOPE

Simple Search



Using PATENTSCOPE you can search 30 million patent documents including 2.2 million published international patent applications (PCT). Detailed coverage information can be found here (->)

Int. Classification(IPC) ▾


E04B 1/76



Office: All

Search

# Результаты (PATENTSCOPE)


 **PATENTSCOPE** Mobile | Deutsch | Español | Français | 日本語 | 한국어 | Português | Русский | 中文

Search International and National Patent Collections


WORLD INTELLECTUAL PROPERTY ORGANIZATION


Search | Browse | Translate | Options | News | Login | Help


Home > IP Services > PATENTSCOPE


Results 1-10 of 6,200 for Criteria:IC:"E04B 1/76" Office(s):all Language:EN Stemming: true 

prev 1 2 3 4 5 6 7 8 9 10 next Page: 1 / 621 [Go >](#)

Refine Search  [Search](#) [RSS](#) 

**Analysis** 

Sort by:  View  List Length   Machine translation

No	Ctr	Title	PubDate	Int. Class	Appl.No	Applicant	Inventor
1.	WO	<a href="#">WO/2013/113455</a> - THERMAL INSULATION MATERIAL WITH IMPROVED FIRE RESISTANCE	08.08.2013	<a href="#">B32B 7/12</a> 	PCT/EP2012/076490	VALSEM INDUSTRIES SAS	DAVIET, Jean-François

A thermal insulation material (10) comprises an inner and outer layers (11, 12) of reflective material with a reflectivity over than 90%. The thermal insulation material (10) further comprises a non-combustible material (15) located between said inner and outer layers (11, 12) and bonded to said inner and outer layers (11, 12) by a polymeric primary bonding agent (16) containing a load of fire-retardant.

# Результаты (PATENTSCOPE)

Sort by: <input type="button" value="Pub Date Desc"/> View <input type="button" value="All"/> List Length <input type="button" value="10"/> Machine translation							
No	Ctr	Title	PubDate	Int. Class	Appl.No	Applicant	Inventor
1.	WO	<a href="#">WO/2013/113455</a> - THERMAL INSULATION MATERIAL WITH IMPROVED FIRE RESISTANCE	08.08.2013	B32B 7/12	PCT/EP2012/076490	VALSEM INDUSTRIES SAS	DAVIET, Jean-François
<p>A thermal insulation material (10) comprises an inner and outer layers (11, 12) of reflective material with a reflectivity over than 90%. The thermal insulation material (10) further comprises a non-combustible material (15) located between said inner and outer layers (11, 12) and bonded to said inner and outer layers (11, 12) by a polymeric primary bonding agent (16) containing a load of fire-retardant.</p>							
2.	EP	<a href="#">2619377</a> - SELF-SUPPORTING MODULE FOR THE FACADE OF A BUILDING	31.07.2013	E04B 1/76	11797347	PRO ENERGY SYSTEMS S R L	FICCADENTI MARCO
<p>A self-supporting module (1) for the facade (2) of a building provided with its own load-bearing structure (4); the module (1) is provided with: an external finishing assembly (5), which has a shaped structure and is suited to frontally close the module (1); a frame (18), which can be coupled with the load-bearing structure (4) and with further self-supporting modules (1) and functions as support for the external finishing assembly (5), there being defined within the frame (18) a gap (21) designed to enable passage of a flow of air for aerating the external finishing assembly (5); and an insulation packet (6), which is coupled to the frame (3) and, has a plurality of layers (33), which are set in contact with one another and are made of at least one first insulating material, each layer (33) being set staggered with respect to the adjacent layers (33) in a first direction.</p>							
3.	EP	<a href="#">2620567</a> - Composite heat insulation system with a fire barrier, heat insulation element and use of the heat insulation element as a fire barrier	31.07.2013	E04B 1/76	13152566	STO AG	HITZLER MARTIN
<p>Die Erfindung betrifft ein Wärmedämmverbundsystem mit einer auf einer Außenseite einer Gebäudeaußenwand angebrachten ein- oder mehrlagigen Wärmedämmschicht und einer hierauf aufgebracht ein- oder mehrlagigen Putzschicht, wobei die Wärmedämmschicht wenigstens eine Wärmedämmplatte aus einem Hartschaum, insbesondere aus einem Polystyrol-Hartschaum, sowie wenigstens ein platten- oder profilförmiges Wärmedämmelement zur Ausbildung einer Brandbarriere umfasst. Erfindungsgemäß umfasst das die Brandbarriere ausbildende, platten- oder profilförmige Wärmedämmelement einen Wärmedämmstoff, welcher Aerogel-Partikel und wenigstens ein wasserbasiertes organisches und/oder anorganisches Bindemittel enthält und eine Wärmeleitfähigkeit <math>\lambda_{\text{eff}} \leq 0,028 \text{ W/(mK)}</math>, vorzugsweise <math>\lambda_{\text{eff}} \leq 0,025 \text{ W/(mK)}</math>, weiterhin vorzugsweise <math>\lambda_{\text{eff}} \leq 0,022 \text{ W/(mK)}</math>, besitzt. Ferner betrifft die Erfindung ein als Brandbarriere in einem Wärmedämmverbundsystem einsetzbares, platten- oder profilförmiges Wärmedämmelement sowie die Verwendung eines solchen platten- oder profilförmigen Wärmedämmelementes als Brandbarriere.</p>							

# Обзор

- Обзор отдельных документов
- Анализ пакетов документов
- Отсылка к опубликованной патентной классификации
  - Схема
  - Ключевые слова

# Спасибо за внимание!

Вопросы?

Дополнительную информацию можно запросить по  
адресу:

[tisc@wipo.int](mailto:tisc@wipo.int)