

ST.96 - ANNEX V

IMPLEMENTATION RULES AND GUIDELINES

Version **3.24.0**

*Revision approved by the XML4IP Task Force of the
 Committee of WIPO Standards (CWS) on December 18, 2019 **June 1, 2020***

Table of Contents

ST.96 - ANNEX V	2
1. INTRODUCTION	4
1.1 Overview	4
1.2 Scope	4
1.3 How to use this document	4
1.4 Terminology	4
1.5 Rule identifiers	4
1.6 Overview of ST.96 Schema Development Procedure	5
2. DESIGNING FOR ST.96 CUSTOMIZATION	6
2.1 Designing for Interoperability	6
2.1.1 Superset of the Schema model	7
2.2 Designing for conformance	7
2.2.1 Subsets of the Schema model	8
2.2.2 Enumeration list constraints on content	8
2.2.3 Other constraints on content	8
2.3 Designing for compatibility	8
2.3.1 Re-use of ST.96 Schema Components	8
2.3.2 Compatible extension of ST.96	9
3. IMPLEMENTATION	11
3.1 Schema folder	11
3.2 Customized schemas	11
3.3 Using the ST.96 components for non-ST.96 document types	13
3.4 Testing implementation for conformation with DRCs	13
4. DESIGN-STAGE AND PRODUCTION-STAGE SCHEMAS	13
5. REFERENCES	14
APPENDIX A - EXAMPLES OF ST.96 INTEROPERABLE SCHEMAS	15
1. Design-Stage Schemas - Modular Schemas	15
1.1. Add an optional element	15
1.2. Add an optional attribute	19
1.3. Remove an optional element	23
1.4. Modify constraints	23
1.5. Make an element required	23
1.6. Add new aggregate component	23
1.7. Add new document components	30
1.8. Remove an existing element and add a new element	31
2. Design-Stage Schemas - Flattened Schemas	31

2.1.	Add an optional element	31
2.2.	Add an optional attribute	34
2.3.	Remove an optional element	36
2.4.	Modify constraints	36
2.5.	Make an element required	36
2.6.	Add new aggregate component	37
2.7.	Add new document components	41
2.8.	Remove an existing element and add a new element	42
APPENDIX B - EXAMPLES OF ST.96 CONFORMANT (Subset) SCHEMAS		43
1.	Design-Stage Schemas - Modular Schemas	43
1.1.	Add an optional element	43
1.2.	Add an optional attribute	43
1.3.	Remove an optional element	43
1.4.	Modify constraints	45
1.5.	Make an element required	47
1.6.	Add new aggregate component	58
1.7.	Add new document components	58
1.8.	Remove an existing element and add a new element	58
2.	Design-Stage Schemas - Flattened Schemas	58
2.1.	Add an optional element	58
2.2.	Add an optional attribute	58
2.3.	Remove an optional element	58
2.4.	Modify constraints	60
2.5.	Make an element required	62
2.6.	Add new aggregate component	68
2.7.	Add new document components	68
2.8.	Remove an existing element and add a new element	68
APPENDIX C - EXAMPLES OF ST.96 COMPATIBLE SCHEMAS		69
1.	Design-Stage Schemas - Modular Schemas	69
1.1.	Add an optional element	69
1.2.	Add an optional attribute	69
1.3.	Remove an optional element	69
1.4.	Modify constraints	69
1.5.	Make an element required	69
1.6.	Add new aggregate component	69
1.7.	Add new document components	69
1.8.	Remove an existing element and add a new element	74
2.	Design-Stage Schemas - Flattened Schemas	80
2.1.	Add an optional element	80
2.2.	Add an optional attribute	80
2.3.	Remove an optional element	80
2.4.	Modify constraints	80
2.5.	Make an element required	80
2.6.	Add new aggregate component	80
2.7.	Add new document components	80
2.8.	Remove an existing element and add a new element	99

4. INTRODUCTION

1.1 Overview

1. 1. WIPO Standard ST.96 provides a collection of extensible markup language (XML) resources that, for many cases, can be used "as is". However, Intellectual Property Offices (IPOs) may need to address use cases whose requirements are not met by the XML Schemas defined in ST.96. This document is intended to guide IPOs to develop their XML schemas based on ST.96 Schemas and other XML resources.
2. 2. One of the goals of the ST.96 Implementation Guidelines is to promote the implementation of ST.96 Schemas in a common interoperable way by IPOs and to maintain a consistent usage of element and attribute names between specific implementations.

1.2 Scope

3. 3. The scope of this document is to provide a comprehensive set of rules and guidelines for the customization and implementation of ST.96 Schemas.

1.3 How to use this document

4. 4. This document is intended for use by IPOs which want to implement and customize ST.96 Schemas in an Interoperable way (Appendix A), a Conformant way (Appendix B) or a Compatible way (Appendix C). This document refers to the main body of ST.96 and its Annexes I, II and III as prerequisites.

When color is used in this document, green indicates where customizations to an XML Instance are guaranteed to validate and red where customizations to an XML Instance are NOT guaranteed to validate.

1.4 Terminology

5. 5. In this document:

- the term "Customization" refers to the alteration of ST.96 Schemas in order to better fit specific requirements.
- the term "ST.96 compatible schema" refers to a schema consistent with the ST.96 Schema Components and the XML Design Rules and Conventions for Industrial Property (DRCs), i.e. Annex I of ST.96. XML instances valid for the ST.96 compatible schema are not guaranteed to successfully validate against ST.96 Schemas.
- the term "ST.96 conformant schema" refers to a compatible schema that has not been extended and that sustains constraints expressed by an ST.96 Schema (as a subset schema to ST.96 schema). XML instances valid for an ST.96 conformant schema will validate against ST.96 Schemas.
- the term "ST.96 interoperable schema" refers to a type of conformant schema that has not been altered in structure from its published state; it sustains constraints expressed by an ST.96 Schema with additional IPO specific components (as a superset schema to ST.96 schemas). XML instances are guaranteed to be valid against ST.96 Schemas.
- the term "Basic Component" refers to W3C Built-in Datatype or Datatypes, simple Type Types or complex Type Types with the xsd:simpleContent definition.
- the term "Aggregate Component" refers to the collection of related Basic Components and/or other Aggregate Components that together convey a distinct business meaning, independent or not of any specific business context.

1.5 Rule identifiers

6. 6. All Office Implementation rules are informative and are identified through a prefix of [OI- nn]. The value "nn" indicates the sequential number of the rule. For example, the rule identifier [OI-06] identifies the 6th rule of the Office Implementation rules.

1.6 Overview of ST.96 Schema Development Procedure

7. The ST.96 Component Schemas have been expressed in W3C XML Schema (XSD), based on the ST.96 DRCs. The ST.96 Component Schemas are used to both specify and validate ST.96 conformance. The following steps are presented as the procedure for developing ST.96 Schema components and a possible procedure for developing Office implementation ~~schemas in an interoperable, conformant or compatible way (refer to Figure 1)~~.

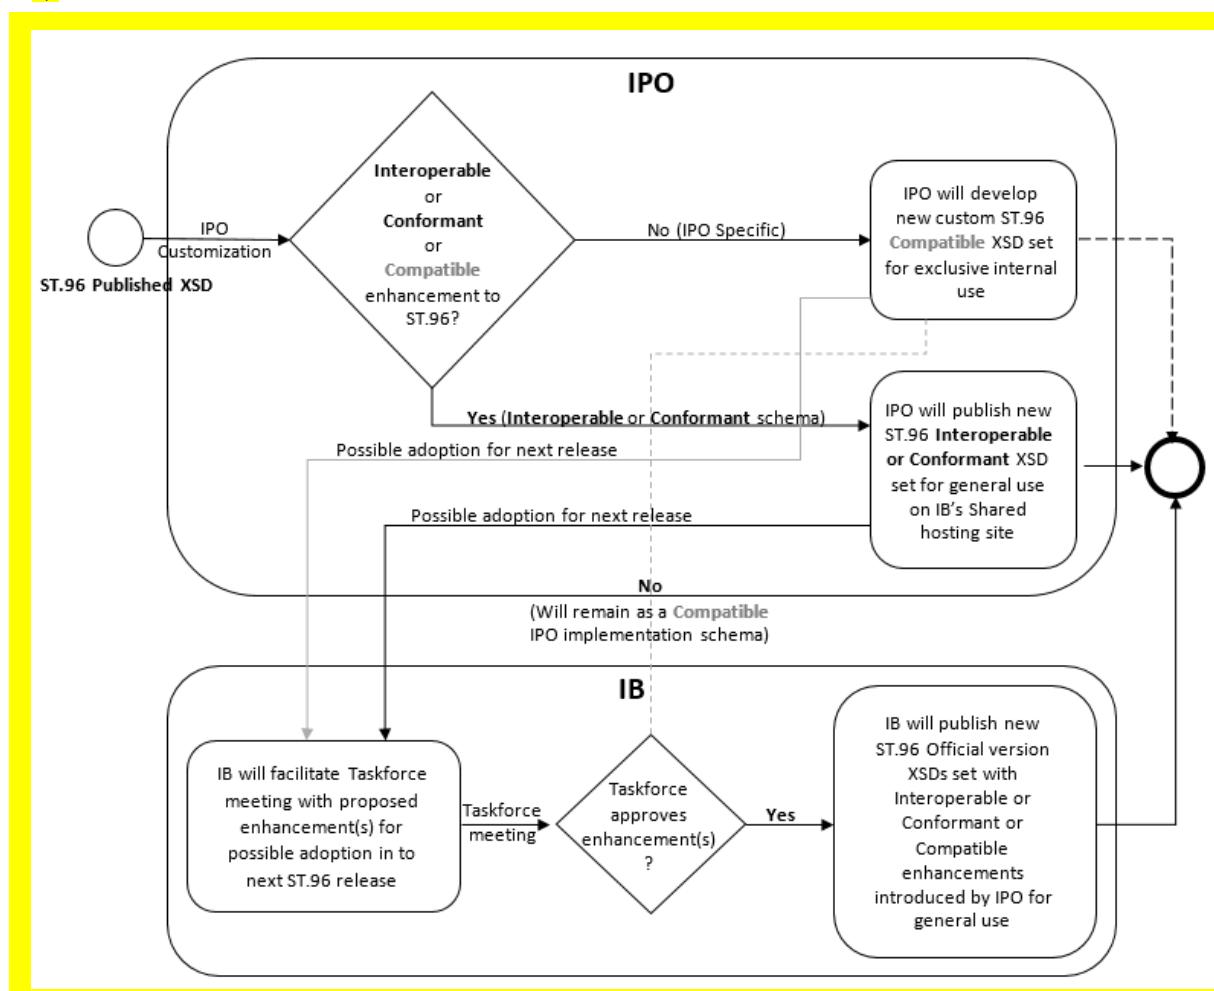


Figure 1: Overview of ST.96 Schema Development Procedure

- Step 1: Analyze the business processes; identify information to be exchanged, used and stored in the processes and define data for the information;
- Step 2: Model the data defined in Step 1;
- Step 3: Look for previously developed XML schema components that can be reused;
- Step 4: Create the ST.96 compliant name and definition for each component following XML Design Rules and Conventions (DRCs, ST.96 Annex I);
- Step 5: Identify any common business terms that are associated with the components;
- Step 6: Build schema components; and
- Step 7: Validate schema component using Schematron.

	Schema		Instance
	Annex I (DRC) Compliance	Alter ST.96 Structure/Constraints	Validation against ST.96?
<u>Compatible (IPO Specific model)</u>	<u>Yes</u>	<u>Yes</u>	<u>Not guaranteed</u>
<u>Conformant (Subset model)</u>	<u>Yes</u>	<u>Yes</u>	<u>Guaranteed</u> ¹
<u>Interoperable (Conformant Superset model)</u>	<u>Yes</u>	<u>No</u>	<u>Guaranteed</u>

¹ None of the required components have not been altered, removed or switched to optional in customized schema

Table 1: Compatible versus conformant versus interoperable: ST.96 customization

2. DESIGNING FOR ST.96 CUSTOMIZATION

8. The design of the conceptual models for ST.96 and its customizations are not affected by the syntactical issues of XML, schema languages, or validation tools. Once the need to customize the ST.96 Schema has been determined, IPOs SHOULD decide whether the result will be ST.96 conformant (subset model), ST.96 interoperable (conformant superset model) or ST.96 compatible (IPO Specific Implementation) schema. [It should be noted that the ST.96 Schemas and Customized interoperable (conformant superset model) schemas are acceptable for data exchange.]
9. Schematron can be used to validate whether an IPO's implementation schema follows the XML Design Rules and Conventions of ST.96. The ST96XSDValidator, which is a tool that uses Schematron to validate XML schema against the ST.96 Design Rules and Conventions, is available in WIPO website at: <http://www.wipo.int/standards/en/st96/v3-0/> <http://www.wipo.int/standards/en/st96/v4-0/>
10. Designing a customization may involve:
 - adding components to meet the requirements of a specific business context; (Conformant, Interoperable and Compatible)
 - omitting optional components not needed in a specific context; (Conformant, Compatible)
 - modifying constraints on possible values for basic components such as code lists; (Conformant, Compatible); and
 - combining (or recombining) and assembling components into new aggregate components (Conformant, Interoperable and Compatible)
 - combining (or recombining) and assembling components into new document components (Compatible)

2.1 Designing for Interoperability

11. ST.96 interoperability at the instance and schema level means that there are no constraint violations when validating the instance against the ST.96. When designing an XML schema for ST.96 interoperability, the key objective is to create custom models that can be used to specify and validate ST.96 interoperable instances. An ST.96 interoperable instance is an instance that validates against an ST.96 Schema and an IPO's customized ST.96 interoperable schema. An ST.96 interoperable schema is a schema that validates only ST.96 interoperable instances. An ST.96 interoperable schema is a superset of an ST.96 Schema. Consequently, designing for interoperability applies primarily to restrictions:
 - supersets of the Schema model — MUST not restrict the number of elements in a ST.96 Schema; and
 - constraints on content — MUST not be altered.

- stop propagation up to the root element level of XML schema to support the data consumer;
- make the changes easily identifiable to support the data producer; and
- make the changes as targeted as possible.
- ST.96 mandatory components must not be removed;
- ST.96 mandatory components must not be changed to optional;
- ST.96 components must remain in the order they were published;
- new components must be added at the bottom of the extended element;
- new components must be added as optional;
- new enumeration values must not be added or removed. These new components must be created in an IPO specific namespace. For example, “uspat” as an extension to an element in the pat namespace;
- ST.96 elements should retain their original namespace (pat, tmk, dgn, com, gin, cpy) but be updated to reference IPO modified complex types which are created in the IPO specific namespace. For example, if com>Contact is customized, then the new components will refer to uscom>ContactType;
- there must only be one component with the same name in either the original namespace or the office-specific namespace. In reference to the example above, there should not be both uscom>Contact and com>Contact; and
- do not add or propagate namespace changes to the root of the document.

12. There are no changes to the element references which import or include the interoperable schemas except the targeted customized element(s).

2.1.1 Superset of the Schema model

13. The use of supersets allows for the addition to a component of any new optional components that are needed to satisfy the new specific business requirements of an implementation.

14. It must be noted that super-setting can only be used to add optional elements and no change in cardinality for any existing elements.

- [OI-01] Interoperable Schemas should use the xsd:import construct to refer to ST.96 Schemas in IPO definitions.
- [OI-02] Interoperable Schemas should use the xsd:import construct to refer to IPO customized type definitions in targeted ST.96 Schemas customized element definitions.
- [OI-03] Interoperable Schemas must not alter any existing ST.96 enumeration values.

2.2 Designing for conformance

13. 11. ST.96 conformance at the instance and schema level means that there are no constraint violations when validating the instance against the ST.96 Schema. When designing an XML schema for ST.96 conformance, the key objective is to create custom models that can be used to specify and validate ST.96 conformant instances. An ST.96 conformant instance is an instance that validates against an ST.96 Schema. An ST.96 conformant schema is a schema that validates only ST.96 conformant instances. An ST.96

conformant schema is a subset of an ST.96 Schema. Consequently, designing for conformance applies primarily to restrictions:

- subsets of the Schema model — restricting the number of elements in a Schema; and
- constraints on content — restricting the possible values a component can have.

14. 12. There are no changes to the element references which import or include the conformant schemas.

2.2.1.1 Subsets of the Schema model

15. 13. The use of subsets allows for the removal from a component of any optional components that are not needed to satisfy the specific business requirements of an implementation.

16. 14. It must be noted that sub-setting can only be used to remove optional elements or change cardinality in ways that do not reduce the required minimum number of occurrences or extend the permitted maximum number of occurrences of an element. The resulting range must be a subset of the original range. Thus, where $1 \leq m \leq n$,

- 0..1 can become 1..1 or the element can be removed (but not, for example, 1..2);
- 0..n can become 0..1, 1..m, 1..n, m..n, or the element can be removed;
- 1..n can become 1..1, m..n, or 1..m; and
- 1..1 cannot be changed.

2.2.2 Enumeration list constraints on content

17. 15. Constraining the values for a component to a fixed set is a common customization requirement. For example, "the Currency Code must be expressed using ISO 4217 codes" is a constraint on the possible values for Currency Code in an instance.

[OI-01-04] Office Implementation Schemas must not use `xsd:list` or `xsd:union` to derive simple Types defined in WIPO Standard ST.96.

2.2.3 Other constraints on content

18. 16. There are other cases in which the treatment of ST.96 instances may require customization in order to limit or restrict content values. For example, "The length of an Address Line cannot exceed 40 characters."

19. 17. There are many business rules a customization may require that constrain the values used in the documents including co-occurrence. For example, the value of one or more components is affected by the value of one or more other components in the document content. Some of these constraints cannot be specified using schema validation semantics. Using Schematron, a customization can specify such assertions in a declarative fashion independent of how the assertions are actually implemented.

2.23 Designing for compatibility

20. 18. While ST.96 conformance cannot be guaranteed, some degree of familiarity can be expected through the re-use of XML schema components defined in ST.96 (Annex III) and ST.96 Design Rules and Conventions (DRCs, Annex I). When creating new components or extending existing ST.96 Schema Components, the DRCs MUST be followed to ensure compatibility.

2.23.1 Re-use of ST.96 Schema Components

21. 19. Re-using ST.96 Schema Components keeps customization as closely aligned with ST.96 as possible and prevents an unnecessary proliferation of Components requiring maintenance. Do not recreate aggregate Components that already exist in ST.96.

2.3.2.2 Compatible extension of ST.96

22. **20.** If re-use of existing ST.96 Schema Components is not feasible, customization can be made to add additional Components to the ST.96 Schema to satisfy business requirements. In these situations, it is possible to extend ST.96 Components in a compatible manner.
23. **21.** Extension means to add to, or associate with, existing Components additional information that may be required for a particular context, for example, an extension creates a superset of the original Component. It is recommended that such an extension includes the original Component as an association from the Component that extends it. For example, `CitedIPDocumentType` defined in ST.96 is an extension of `CitedDocumentType` in ST.96 because it contains additional information required if the cited document is an IP document. Structurally, `CitedIPDocumentType` has an association to `CitedDocumentType`, making `CitedIPDocumentType` a superset of `CitedDocumentType`.
24. **22.** Compatible extensions can be implemented in parts of a schema. This allows validation checks to be built into the compatible schema that cannot be enforced in the extension area of a conformant schema.

25. **23.** The compatible schema does not share the same namespace as ST.96 Schemas. It allows the Office Implementation Schemas to use the default namespace. They should import ST.96 Schemas. To avoid confusion with ST.96 Schemas, it is not recommended to redefine them. If redefined, the namespace prefix for an Office's Implementation Schema should follow the two-letter codes (in lower case only) listed in WIPO Standard ST.3.

[OI-02] Compatible Schemas should use `xsd:import` construct to refer to ST.96 Schemas.

[OI-03] In Compatible Schemas, redefinition of any types, elements and attributes defined in the WIPO Standard ST.96 using `xsd:redefine` construct should be avoided.

[OI-04] Compatible Schemas may use a default namespace for efficient operations.

[OI-05] Compatible Schemas must use the two-letter codes defined in WIPO Standard ST.3 for the office namespace prefix.

[OI-05] Compatible Schemas should use `xsd:import` construct to refer to ST.96 Schemas.

[OI-06] In Compatible Schemas, redefinition of any types, elements and attributes defined in the WIPO Standard ST.96 using `xsd:redefine` construct should be avoided.

[OI-07] Compatible Schemas may use a default namespace for efficient operations.

[OI-08] Compatible Schemas must use the two-letter codes defined in WIPO Standard ST.3 for the office namespace prefix.

2.2.2.1 Using qualified names

26. **24.** Besides namespace qualification, IPOs may also qualify the property term of a component specified as its Dictionary Entry Name in the IP Data Dictionary, i.e. Annex II of ST.96, to indicate that the customized component is based on an ST.96 Schema Component. For example, "Address. Geographic Region" in ST.96 can be qualified for the Canadian office as "Address. CA Geographic Region", indicating that the use of the geographic region value is restricted to the context of Canadian provinces. The element name would be `CAGeographicRegion` which uses `GeographicRegionType` defined in ST.96. For example, `ruImageContentCategory` is an office implementation attribute name which is based on the ST.96 attribute `ImageContentCategory`.

[OI-06-09] Compatible Schemas may use the two-letter codes defined in WIPO Standard ST.3 as a qualifier for customized components based on the ST.96 Schema.

2.2.2.2 Re-using Aggregate Components

27. **25.** The principle applied is that if a required aggregate component has the same structure as a standard ST.96 component, then it should not be a redefinition but a re-use by association. The qualifying terms used to name the new associated component then describe the role it plays. For example, if an `AddressBook` is required for an Applicant, and this uses the normal `AddressBookType` structure, it could be defined as `ApplicantAddressBook`.
28. **26.** If the new aggregate component does not have the same structure as a standard ST.96 Component, then the required component MUST have a new name, not a qualified name. If possible, the new aggregate

component may then be associated with the ST.96 Component being extended. For example, if an Address has additional components when the address is in Korea, then a new aggregate component called KRAddress would be created. This is not a qualification, but a new name. Ideally this should contain the original Address structure by association plus the new Korean components.

2.2.2.3 New Basic components

29. 27. A customization may require new basic components; these should be based on an existing ST.96 or W3C built-in data type (or a refinement thereof). Note that, where the new basic component is included in an aggregate component, it will result in a new aggregate component being defined as well.

30. 28. When establishing a new basic component, it is necessary to associate it with a data type. This is determined by the Representation Term part of component's Dictionary Entry Name. For example, a Korean Address may have an additional component called "Dong. Text". This new basic information entity would use the standard Text data type.

31. 29. Changing or specializing a component's definition changes the component. Therefore, a new basic component must be defined. For example, in ST.96, "Person. Other Name. Name" is defined as "Person name other than first name, middle name, last name, first last name, second last name, suffix and prefix". If a component is required to specify the Login name as a specific other name, then a new component (perhaps called "Person. Login Name. Name") should be defined.

32. 30. In cases where the required component's representation does not fit an existing data type, a new data type may be required. New data types can be based on either ST.96 data types or W3C built-in data types. The following operations are allowed on ST.96 simple Types and examples of XML schema codes are available in Appendix A:

- add a character length restriction;
- add/change an enumeration list; and
- add a pattern restriction.

2.2.2.4 New associations

33. 31. Aggregate components are included in a schema model by associating them with a parent aggregate. If the required aggregation has the same structure as an existing aggregate a new association should be created with the existing aggregate (as in 2.2.2.2). This new association represents a new use of the aggregate, so qualifying terms can be used to describe the new role. For example, in ST.96, AddressBook is re-used in contexts such as

ClaimantAddressBook, ApplicantAddressBook and LicenseeAddressBook. They all share the same structure as AddressBookType with the terms "Claimant", "Applicant", and "Licensee" providing the qualification.

34. 32. By re-using the unqualified aggregate (AddressBook), the same XML type (AddressBookType) will be used for implementation of all these components.

2.2.2.5 New Aggregate Components

35. 33. A new aggregate component should be created if the required aggregation component does not exist in ST.96 or is an extension of an existing aggregate component, making it no longer conformant. When creating new aggregate components, there are some general principles to follow:

(a) (a) A new aggregate component may also include the aggregate component being extended, as a child by extension. For example, in ST.96, CitedIPDocumentType is a new aggregate that has a different structure to CitedDocumentType. The CitedDocumentType structure is re-used by extension in CitedIPDocumentType, in addition, CitedIPDocumentType also contains additional components. The name CitedIPDocumentType is not a qualification of the name CitedDocumentType, but an extension to the ST.96 CitedDocumentType to create a new aggregate.

(b) (b) New aggregate components should attempt to re-use patterns of ST.96 structures where possible.

(c) (e) When defining new aggregate components, different constructs and mechanisms are not allowed in ST.96 Schemas but are tolerated in Office Implementation Schemas. This is the case for the all compositor and substitution groups.

(d) (d) The following operations can be performed to customize an existing aggregate component. Examples of XML schema codes are provided in Appendix A:

- add and/or remove an element;
- add and/or remove an attribute;
- make an element mandatory and/or change its cardinality; and
- make an attribute required.

[OI-07] Compatible Schemas may use substitution groups.

2.2.2.6 New document component schemas

36. 34. Where existing document component schemas defined in ST.96 do not meet requirements, it is necessary to create a new document model. The key steps in assembling new document type structures are:

- (a) (a) Select/create the root aggregate for the document type;
- (b) (b) Assemble the required ST.96 Schema Components (and/or customized extensions), applying cardinality constraints;
- (c) (e) For all required associations from these Components assemble the required components (and/or customized extensions), applying cardinality constraints; and
- (d) (d) Continue step (c) above recursively through all required associations.

3. IMPLEMENTATION

3.1 Schema folder

37. 35. It is recommended that the folder structure for implementation schemas be defined as it is in ST.96 to minimize changes of import declaration.

3.2 Customized schemas

38. 36. At least two scenarios in particular lend themselves to XSD derivations performed on existing data types:

- an existing ST.96 data type fits the requirements for the application with modifications supported by XSD derivation. These modifications can include extension (adding new information to an existing ST.96 data type) and/or refinement (restricting the set of information allowed to a subset of that permitted by the existing data type); and
- no existing ST.96 data type is found that can be used as the basis for the new data type. Nevertheless, the base library of components that underlies ST.96 can be used to build up the new data type so as to ensure that interoperability is at least possible at the basic component level.

39. 37. The Interoperable schema model improves data exchange between IPO's, making it more practical and adoptable by encouraging all participating IPO's to add their customizations to base ST.96 schemas in a central repository; offering the following advantages:

- a common ground for data extraction using universal XSLT based data extraction based on the official ST.96 schema model;
- central repository of potential improvements for the IB to track and adopt for future ST.96 versions.

The following table, Table 2, summarizes types of common customizations to ST.96 schemas for both Conformant (Interoperable/Superset and Subset) and Compatible approaches in developing schemas.

Appendix Section #	<u>NOT guaranteed to validate</u> <u>Types of Customizations</u>	<u>Conformant</u>		<u>Compatible</u>
		<u>Interoperable/ Superset</u> <u>(Appendix A)</u>	<u>Subset</u> <u>(Appendix B)</u>	<u>(Appendix C)</u>
1.1.1.2 / 2.1.2.2	Adding an optional component to meet the requirements of a specific business context *Unaltered structure and appended to the existing structure (elements only, attributes can be ordered since XSD allows it)	<u>Allowed</u>	<u>Allowed</u>	<u>Allowed</u>
1.3 / 2.3	Omitting optional components not needed in a specific context	<u>Not Allowed</u>	<u>Allowed</u>	<u>Allowed</u>
1.4 / 2.4	Modifying constraints on possible values for basic components such as code lists	<u>Not Allowed</u>	<u>Allowed</u>	<u>Allowed</u>
1.5 / 2.5	Changing an optional component(s) to a required component(s)	<u>Not Allowed</u>	<u>Allowed</u>	<u>Allowed</u>
1.6 / 2.6	Combining (or recombining) and assembling components into new aggregate components (optional)	<u>Allowed</u>	<u>Allowed</u>	<u>Allowed</u>
1.7 / 2.7	Combining (or recombining) and assembling components into new document components	<u>Not Allowed</u>	<u>Not allowed</u>	<u>Allowed</u>
1.8 / 2.8	Removing an existing element and adding a new element	<u>Not Allowed</u>	<u>Not allowed</u>	<u>Allowed</u>

Table 2: Summary of common customizations for conformant versus compatible schemas

40. Where the requirements are for a pure superset, it is possible to develop a new customized schema adding new additional elements or attributes to existing ST.96 elements or attributes to produce an interoperable schema.
41. Though this document (Figure 3) presents two other types of customizations, subset conformant and compatible customizations, the IB believes the interoperable/superset conformant model for practical reasons is best for efficient data exchange.
42. Where the requirements are for a pure subset, it is possible to prune a ST.96 schema to create a new, smaller schema defining only the subset required. ST.96 relies on a common library of re-usable data types, and therefore this approach does not support the restriction of selective data types based on context. For example, an Address when used in one part of the subset schema cannot have a different restriction to an Address in another part of the document.
43. One approach for producing subset schemas is to work with the ST.96 schemas as input and use the XML comment construct to comment out all of the Components not used by the customization. A human reader of the schema specifications can see all of the ST.96 standardized constructs, easily distinguishing those that are in the customization and those that are not.
44. Another approach for producing subset schemas is to work at an abstract model level and to synthesize the schema fragments from scratch from the subset model. This approach implies all required elements are defined as global. In the following example, the first approach is applied.

```
<xsd:complexType name="PersonNameType">
    <xsd:sequence>
        <xsd:element ref="com:PersonNamePrefix" minOccurs="0"/>
        <xsd:element ref="com:FirstName" />
        <xsd:element ref="com:MiddleName" minOccurs="0"/>
        <xsd:element ref="com:LastName" />
        <xsd:element ref="com:FirstLastName" minOccurs="0"/>
        <xsd:element ref="com:SecondLastName" minOccurs="0"/>
        <xsd:element ref="com:PersonNameSuffix" minOccurs="0"/>
        <xsd:element ref="com:PreferredName" minOccurs="0"/>
```

```

<xsd:element ref="com:PersonOtherName" minOccurs="0"/>
</xsd:sequence>
</xsd:complexType>
  
```

3.3 Using the ST.96 components for non-ST.96 document types

45. 40. Even when a completely new document type must be defined, it can prove advantageous to use as many of the ST.96 Components as possible. [Figure 1](#) [Figure 1. Using the2](#) shows an approach to specifying the schema fragments defining a non-ST.96 document using both ST.96 and non-ST.96 Components.

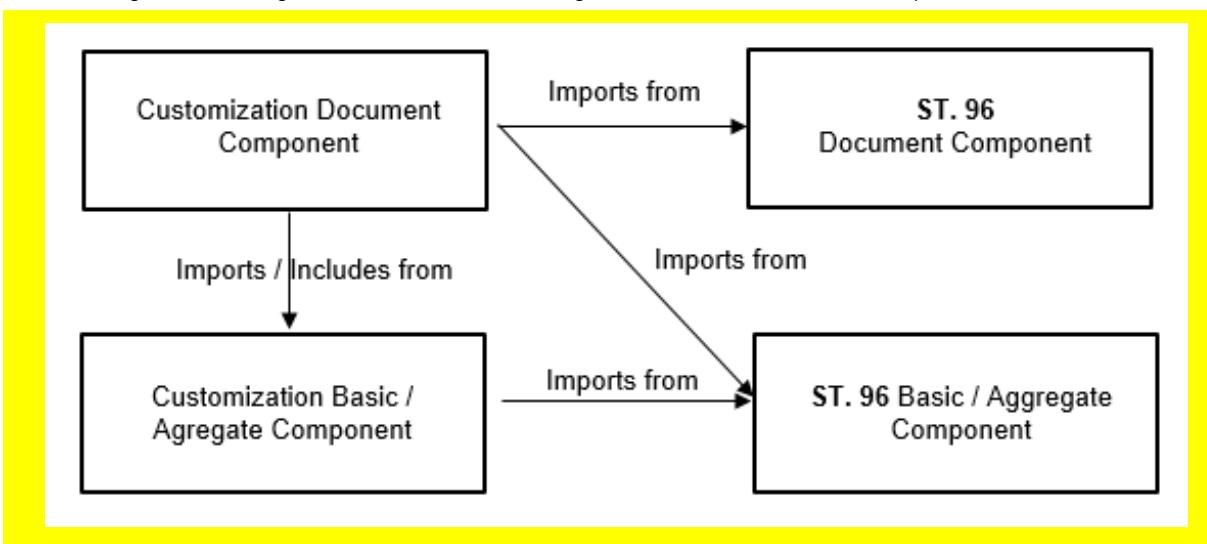


Figure 1. [Using the2](#): Specifying using both ST.96 Components for and non-ST.96 documents Components

3.4. Testing implementation for conformance with DRCs

46. 41. Rule-based validation such as Schematron may be used to validate an Office's Implementation Schema for conformance with DRCs (Annex I of ST.96). [Refer to Figure 1](#). [Using the2](#)

4. DESIGN-STAGE AND PRODUCTION-STAGE SCHEMAS

47. 42. Depending on an IPO's requirements, production-stage schema can be different from the design-stage schema. The design-stage schemas may exist in two forms:

- Modular Schemas: Each element, simple type or complex type definition i.e. basic components and aggregate components reside in their own schema file. The advantage of using modular schemas is the ability to compose the larger schema (by means of `include` or `import`) and the smaller files are more manageable and reusable than the single full schema.
- Flattened Schemas: Flattened schemas contain all the dependent files that are included in a schema belonging to the same namespace into one file. In the process, the components of any included schemas are added as global components of the flattened schema. In this way, the flattened schema can be used without having to rely on a network connection or an IO process to access the required files. This could aid in reducing processing time for each instance.

48. 43. The design-stage schema, in general, is used to produce the production-stage schema for efficiency purposes, which can be the flattened schemas in most cases. It must be ensured that the XML instances for data exchange conform to the design-stage schema, which means that the instances should contain the same namespace prefixes and schema version.

49. 44. In a design-stage schema, all namespaces should be identified and elements and attributes fully qualified; all components should have their own version information. In the course of designing a schema based on the

ST.96 Standard it is important to keep careful track of components using namespace and version information. To produce production-stage schemas it might be advisable to resolve all external references in a schema in advance and use the fully integrated schema in a production environment to reduce processing time for each instance. Such a practice is completely dependent on local circumstances and therefore no further recommendations can be given in this document.

50. 45. **Figure 3** below shows how ST.96 Design Stage and ST.96 Production Schemas are leveraged to create Office Implementation Schemas for both Conformance and Compatibility. ST.96 Design Rules and Conventions (Annex I) apply to both ST.96 Schemas and Office Implementation Conformant and Compatible Schemas. ST.96 design-stage and production-stage schemas can be imported to develop Office Implementation Schemas. The developed schemas can be validated for adherence to ST.96 Design Rules and Conventions (Annex I) using *ST96XSDValidator*.

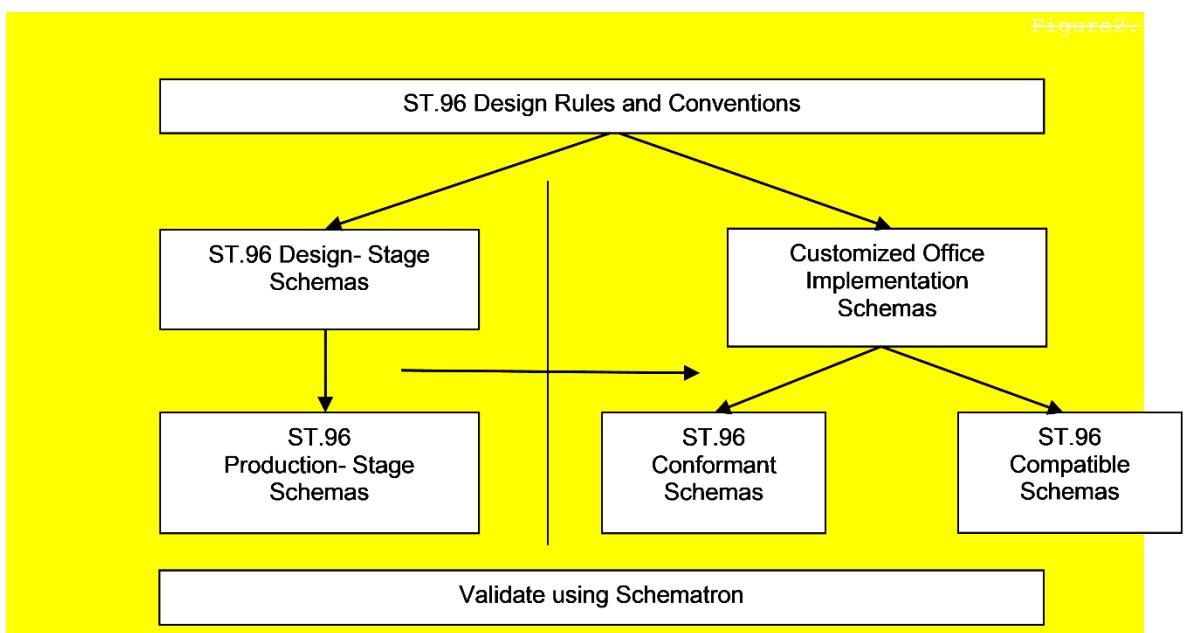


Figure 3: Overview of ST.96 customization process

5. REFERENCES

- UBL 2 Guidelines for Customization, available at:
<http://docs.oasis-open.org/ubl/guidelines/UBL2-Customization1.0cs01.pdf>
<http://docs.oasis-open.org/ubl/guidelines/UBL2-Customization1.0cs01.pdf>
- Exchange Network shared schema components- usage guide, available at:
http://www.exchangenetwork.net/dev_schema/SharedSchemaComponents-UsageGuide_v2.0.pdf
- Guidelines for Electronic Text Encoding and Interchange- the TEI Consortium, P5, Using the TEI section, available at: <http://www.tei-c.org/release/doc/tei-p5-doc/en/html/USE.html>
http://www.exchangenetwork.net/dev_schema/SharedSchemaComponents-UsageGuide_v2.0.pdf
- Guidelines for Electronic Text Encoding and Interchange- the TEI Consortium, P5, Using the TEI section, available at: <http://www.tei-c.org/release/doc/tei-p5-doc/en/html/USE.html>
- Rule-based validation – Schematron, ISO/IEC 19757-3:2006

APPENDIX A - Examples of EXAMPLES OF ST.96 conformant schemas INTEROPERABLE SCHEMAS

The following examples are listed to show how developers define ST.96 conformant schemas. These examples are based on ST.96 V4_0. Designing for conformance applies primarily to restrictions which are:

Subsets • Supersets of the Schema model — restricting appending the number of new optional Components in the ST.96 Schema; and

• Constraints on content — restricting the possible values a Component can have.

1. SUBSET OF THE SCHEMA MODEL

1. 1.1 Design-Stage Schemas - Modular Schemas: Remove

1.1. Add an optional element

Patent Sample Business Case: Remove Add an optional element ~~precede from ContractRole to the PlantName~~ ~~dgn:Applicant~~ Structure.

1. Create a folder called "USPatentRUDesign" at the same level as "Common", "Patent", "Trademark", "Common" etc.

2.

3.

2. Set the target Namespace to the IPO's namespace and add new namespace entries `xmlns:xxpat="" xmlns:xdgdn=""`, where xx is the lowercase ST.3 Code. Each IPO is expected to version the modified components separate from WIPO because this is the OfficeIPO specific implementation. "V1_0" is shown in the following example because this is the first Office modified component.

```
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:dgn="http://www.wipo.int/standards/XMLSchema/ST96/Design"
  xmlns:rudgn="http://rupro.ru/standards/XMLSchema/ST96/Design"
  targetNamespace="http://rupro.ru/standards/XMLSchema/ST96/Design"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V1_0">
```

3. Define new element type definition ContractRoleType.xsd as below:

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:dgn="http://www.wipo.int/standards/XMLSchema/ST96/Design"
  xmlns:rudgn="http://rupro.ru/standards/XMLSchema/ST96/Design"
  targetNamespace="http://rupro.ru/standards/XMLSchema/ST96/Design"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V4_0">
  <xsd:simpleType name="ContractRoleType">
    <xsd:restriction base="xsd:token">
      Please note that <xsd:enumeration value="Customer">
        <xsd:annotation>
          <xsd:documentation>Indicates whether the examples in entity is the contract customer</xsd:documentation>
        </xsd:annotation>
      </xsd:enumeration>
      <xsd:enumeration value="Implementor">
        <xsd:annotation>
          <xsd:documentation>Indicates whether the entity is the contract implementor</xsd:documentation>
        </xsd:annotation>
      </xsd:enumeration>
    </xsd:restriction>
  </xsd:simpleType>
</xsd:schema>
```

4. Define new element definition ContractRole.xsd by referring rudgn:ContractRoleType.xsd created above

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:dgn="http://www.wipo.int/standards/XMLSchema/ST96/Design"
  xmlns:rudgn="http://rupro.ru/standards/XMLSchema/ST96/Design"
  targetNamespace="http://rupro.ru/standards/XMLSchema/ST96/Design"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V4_0">
  <xsd:include schemaLocation="ContractRoleType.xsd"/>
  <xsd:annotation>
    <xsd:appinfo>
      <com:SchemaCreatedDate>2017-08-17</com:SchemaCreatedDate>
      <com:SchemaLastModifiedDate>2017-08-
      31</com:SchemaLastModifiedDate>
      <com:SchemaContactPoint>otd3138@rupro.ru</com:SchemaContactPoint>
      <com:SchemaReleaseNoteURL/>
    </xsd:appinfo>
  </xsd:annotation>
  <xsd:element name="ContractRole" type="rudgn:ContractRoleType">
    <xsd:annotation>
      <xsd:documentation>Applicant's role in
contract</xsd:documentation>
    </xsd:annotation>
  </xsd:element>
</xsd:schema>
```

5. Define new element type definition ApplicantType.xsd as below:

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:dgn="http://www.wipo.int/standards/XMLSchema/ST96/Design"
  xmlns:rudgn="http://rupro.ru/standards/XMLSchema/ST96/Design"
  targetNamespace="http://rupro.ru/standards/XMLSchema/ST96/Design"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V4_0">
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  schemaLocation="..../Common/NationalityCode.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  schemaLocation="..../Common/LegalEntityName.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  schemaLocation="..../Common/IncorporationCountryCode.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  schemaLocation="..../Common/IncorporationState.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  schemaLocation="..../Common/CommentText.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  schemaLocation="..../Common/Version.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  schemaLocation="..../Common/PartyIdentifier.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  schemaLocation="..../Common/Contact.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  schemaLocation="..../Common/PublicationContact.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  schemaLocation="..../Common/operationCategory.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  schemaLocation="..../Common/sequenceNumber.xsd"/>
```

```

<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Design"
schemaLocation=".../Design/Entitlement.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Design"
schemaLocation=".../Design/ApplicantContractingParty.xsd"/>
<xsd:include schemaLocation="ContractRole.xsd"/>
<xsd:annotation>
  <xsd:appinfo>
    <com:SchemaCreatedDate>2019-09-18</com:SchemaCreatedDate>
    <com:SchemaLastModifiedDate>2019-09-
20</com:SchemaLastModifiedDate>
    <com:SchemaContactPoint>otd3138@rupto.ru</com:SchemaContactPoint>
    <com:SchemaReleaseNoteURL/>
  </xsd:appinfo>
</xsd:annotation>
<xsd:complexType name="ApplicantType">
  <xsd:sequence>
    <xsd:element ref="com:NationalityCode" minOccurs="0"/>
    <xsd:element ref="com:LegalEntityName" minOccurs="0"/>
    <xsd:element ref="com:IncorporationCountryCode"
minOccurs="0"/>
    <xsd:element ref="com:IncorporationState" minOccurs="0"/>
    <xsd:element ref="com:CommentText" minOccurs="0"/>
    <xsd:element ref="dgn:Entitlement" minOccurs="0"/>
    <xsd:element ref="dgn:ApplicantContractingParty"
minOccurs="0"/>
    <xsd:element ref="com:Version" minOccurs="0"/>
    <xsd:choice maxOccurs="unbounded">
      <xsd:element ref="com:PartyIdentifier"/>
      <xsd:element ref="com>Contact"/>
      <xsd:element ref="com:PublicationContact"/>
    </xsd:choice>
    <xsd:element ref="rudgn:ContractRole" minOccurs="0"/>
  </xsd:sequence>
  <xsd:attribute ref="com:operationCategory"/>
  <xsd:attribute ref="com:sequenceNumber"/>
</xsd:complexType>
</xsd:schema>

```

6. Update Applicant.xsd in ST.96 “Design” folder, to update Type, reference to IPO customized ApplicationType.xsd

```

<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:dgn="http://www.wipo.int/standards/XMLSchema/ST96/Design"
xmlns:rudgn="http://rupto.ru/standards/XMLSchema/ST96/Design"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
targetNamespace="http://www.wipo.int/standards/XMLSchema/ST96/Design"
elementFormDefault="qualified" attributeFormDefault="qualified"
version="V4_0">
  <xsd:import namespace="http://rupto.ru/standards/XMLSchema/ST96/Design"
schemaLocation=".../RUDesign/ApplicantType.xsd"/>
  <xsd:element name="Applicant" type="rudgn:ApplicantType">
    <xsd:annotation>
      <xsd:documentation>Applicant or holder
details</xsd:documentation>
    </xsd:annotation>
  </xsd:element>
<Appendix use=></xsd:schema>

```

ST.96 Official Version Structure	IPO Interoperable Version (RUPTO Customization)
<xsd:element name="DesignTransaction" type="dgn:DesignTransactionType">	
<xsd:complexType name="DesignTransactionType">	
<xsd:sequence>	
<xsd:element ref="com:TransactionHeader" minOccurs="0"/>	
<xsd:element ref="dgn:DesignTransactionBody" maxOccurs="unbounded"/>	
•	
•	
•	
<xsd:element name="TransactionContentBag" type="dgn:TransactionContentBagType">	
•	
<xsd:element name="TransactionData" type="dgn:TransactionDataType">	
•	
<xsd:element name="Applicant" type="dgn:ApplicantType">	<xsd:element name="Applicant" type="rudgn:ApplicantType">
<xsd:complexType name="ApplicantType">	<xsd:complexType name="ApplicantType">
<xsd:sequence>	<xsd:sequence>
<xsd:element ref="com:NationalityCode" minOccurs="0"/>	<xsd:element ref="com:NationalityCode" minOccurs="0"/>
<xsd:element ref="com:LegalEntityName" minOccurs="0"/>	<xsd:element ref="com:LegalEntityName" minOccurs="0"/>
<xsd:element ref="com:IncorporationCountryCode" minOccurs="0"/>	<xsd:element ref="com:IncorporationCountryCode" minOccurs="0"/>
<xsd:element ref="com:IncorporationState" minOccurs="0"/>	<xsd:element ref="com:IncorporationState" minOccurs="0"/>
<xsd:element ref="com:CommentText" minOccurs="0"/>	<xsd:element ref="com:CommentText" minOccurs="0"/>
<xsd:element ref="dgn:Entitlement" minOccurs="0"/>	<xsd:element ref="dgn:Entitlement" minOccurs="0"/>
<xsd:element ref="dgn:ApplicantContractingParty" minOccurs="0"/>	<xsd:element ref="dgn:ApplicantContractingParty" minOccurs="0"/>
<xsd:element ref="com:Version" minOccurs="0"/>	<xsd:element ref="com:Version" minOccurs="0"/>
<xsd:choice maxOccurs="unbounded">	<xsd:choice maxOccurs="unbounded">
<xsd:element ref="com:PartyIdentifier"/>	<xsd:element ref="com:PartyIdentifier"/>
<xsd:element ref="com>Contact"/>	<xsd:element ref="com>Contact"/>
<xsd:element ref="com:PublicationContact"/>	<xsd:element ref="com:PublicationContact"/>
</xsd:choice>	</xsd:choice>
</xsd:sequence>	</xsd:sequence>
<xsd:attribute ref="com:operationCategory"/>	<xsd:attribute ref="com:operationCategory"/>
<xsd:attribute ref="com:sequenceNumber"/>	<xsd:attribute ref="com:sequenceNumber"/>
</xsd:complexType>	</xsd:complexType>

Figure 4: XML instance comparison

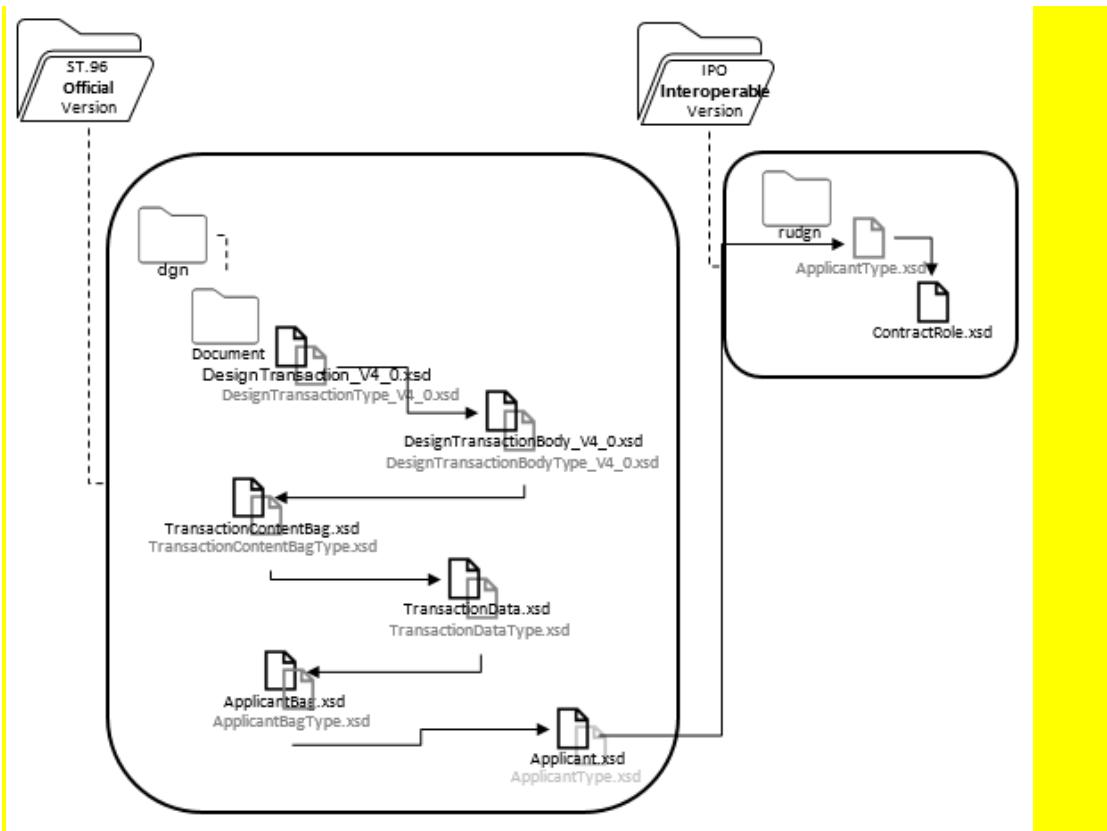


Figure 5: Graphical View

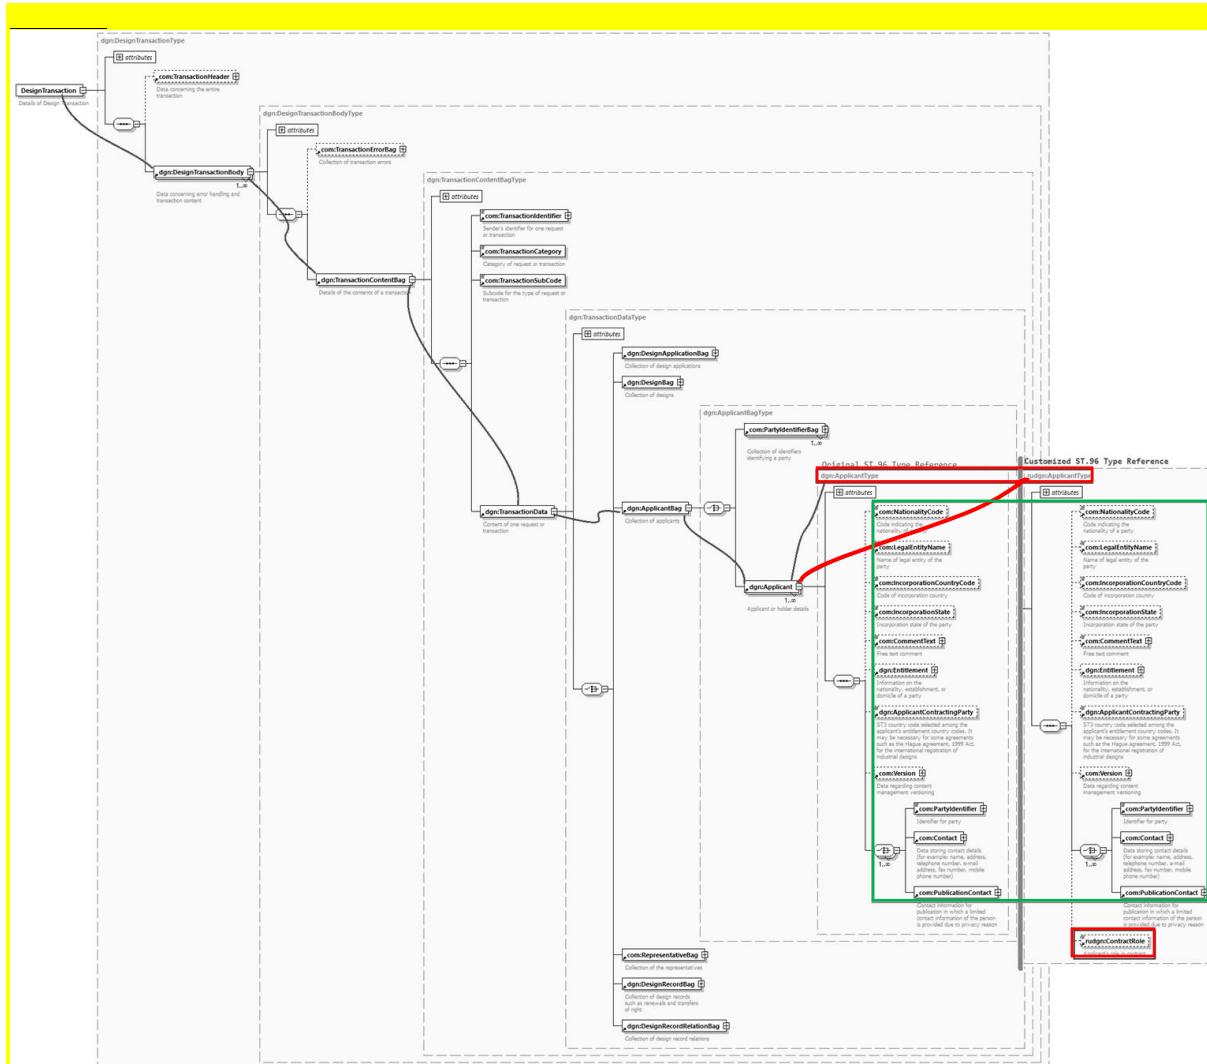


Figure 6: Updated XSD View

1.2. Add an optional attribute

Patent Sample Business Case: Add an optional attribute `activeIndicator` to the `pat:RegisteredPractitioner` Structure.

1. Create a folder called "USCommon" at the same level as "Common", "Patent", "Trademark" etc.
2. Set the target Namespace to the IPO's namespace and add new namespace entries `xmlns:xxcom`, where `xx` is the lower-case ST.3 Code. Each IPO is expected to version the modified components separate from WIPO because this is the IPO specific implementation. "V1_0" is shown in the following example because this is the first Office modified component...

Note: this example uses URN for IPO namespace as approved at USPTO.

Other IPO's can use either URN or URL namespace based on their internal practice.

```
<?xml version="1.0" encoding="UTF-8"?>
```

```
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:uscom="urn:us:gov:doc:uspto:common"
  targetNamespace="urn:us:gov:doc:uspto:common" elementFormDefault="qualified"
  attributeFormDefault="qualified" version="V1_0">
```

3. Define new attribute activeIndicator.xsd as xsd:Boolean

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:uscom="urn:us:gov:doc:uspto:common"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  targetNamespace="urn:us:gov:doc:uspto:common" elementFormDefault="qualified"
  attributeFormDefault="qualified" version="V8_0 ">
  <xsd:attribute name="activeIndicator" type="xsd:boolean">
    <xsd:annotation>
      <xsd:documentation>Indicates active/inactive
status.</xsd:documentation>
    </xsd:annotation>
  </xsd:attribute>
</xsd:schema>
```

4. Create a folder called "USPatent" at the same level as "Patent", "Trademark", "Common" etc.
5. Under "USPatent" folder, create a new W3C schema file for Type, RegisteredPractitionerType.xsd
6. Redefine pat:RegisteredPractitionerType.xsd structure with new IPO added attribute towards the end of existing components as shown below:

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:uspat="urn:us:gov:doc:uspto:patent"
  xmlns:uscom="urn:us:gov:doc:uspto:common"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  targetNamespace="urn:us:gov:doc:uspto:patent" elementFormDefault="qualified"
  attributeFormDefault="qualified" version="V1_V8_0">
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
    schemaLocation="../Patent/RegisteredPractitionerRegistrationNumber.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
    schemaLocation="../Patent/RegisteredPractitionerCategory.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    schemaLocation="../Common/Contact.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    schemaLocation="../Common/PublicationContact.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    schemaLocation="../Common/"/>
```

```
5. sequenceNumber.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  schemaLocation="../Common/id.xsd"/>
<xsd:import <xsd:import namespace="urn:us:gov:doc:uspto:common"
  schemaLocation="../USCommon/activeIndicator.xsd"/>
<xsd:complexType name="RegisteredPractitionerType">
  <xsd:sequence>
    <xsd:element
      ref="pat:RegisteredPractitionerRegistrationNumber" minOccurs="0"/>
    <xsd:element ref="pat:RegisteredPractitionerCategory"/>
    <xsd:choice maxOccurs="2">
      <xsd:element ref="com:Contact"/>
      <xsd:element ref="com:PublicationContact"/>
    </xsd:choice>
  </xsd:sequence>
  <xsd:attribute ref="com:sequenceNumber" use="required"/>
```

```

        <xsd:attribute ref="uscom:activeIndicator"/>
        <xsd:attribute ref="com:id"/>
    </xsd:complexType>
</xsd:schema>

```

7. Update ST.96 RegisteredPractitioner.xsd to refer IPO customized RegisteredPractitionerType.xsd with appropriate import statement.

```

<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  xmlns:uspat="urn:us:gov:doc:uspto:patent"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V4_0">
    <xsd:import namespace="urn:us:gov:doc:uspto:patent"
      schemaLocation="../USPatent/RegisteredPractitionerType.xsd"/>
    <xsd:element name="RegisteredPractitioner"
      type="uspat:RegisteredPractitionerType">
      <xsd:annotation>
        <xsd:documentation>The individual who represents or prosecutes
          on behalf of the inventor</xsd:documentation>
      </xsd:annotation>
    </xsd:element>
</xsd:schema>

```

ST.96 Official Version Structure	IPO Interoperable Version (USPTO Customization)
<xsd:element name="BibliographicData" type="pat:BibliographicDataType">	
<xsd:complexType name="BibliographicData_Type">	
<xsd:sequence>	
<xsd:element ref="pat:PatentPublicationIdentification" minOccurs="0"/>	
<xsd:element ref="pat:ApplicationIdentification"/>	
<xsd:element ref="pat:PatentGrantIdentification" minOccurs="0"/>	
•	
•	
•	
<xsd:element ref="pat:ExemplaryClaimBag" minOccurs="0"/>	
<xsd:element ref="com: HagueAgreementData" minOccurs="0"/>	
<xsd:element ref="pat:PartyBag">	
<xsd:complexType name="PartyBagType">	
<xsd:choice maxOccurs="unbounded">	
<xsd:element ref="pat:ApplicantBag"/>	
<xsd:element ref="pat:InventorBag"/>	
<xsd:element ref="pat:OwnerBag"/>	
<xsd:element ref="pat:AssigneeBag"/>	
<xsd:element ref="pat:RegisteredPractitionerBag"/>	
<xsd:choice>	
<xsd:element ref="pat:RegisteredPractitioner" maxOccurs="unbounded"/>	
<xsd:element name="RegisteredPractitioner" type="pat:RegisteredPractitionerType">	
<xsd:complexType name="RegisteredPractitionerType">	<xsd:complexType name="RegisteredPractitionerType">
<xsd:sequence>	<xsd:sequence>
<xsd:element ref="pat:RegisteredPractitionerRegistrationNumber" minOccurs="0"/>	<xsd:element ref="pat:RegisteredPractitionerRegistrationNumber" minOccurs="0"/>
<xsd:element ref="pat:RegisteredPractitionerCategory"/>	<xsd:element ref="pat:RegisteredPractitionerCategory"/>
<xsd:choice maxOccurs="2">	<xsd:choice maxOccurs="2">
<xsd:element ref="com>Contact"/>	<xsd:element ref="com>Contact"/>
<xsd:element ref="com:PublicationContact"/>	<xsd:element ref="com:PublicationContact"/>
<xsd:choice>	<xsd:choice>
<xsd:sequence>	<xsd:sequence>
<xsd:attribute ref="com:sequenceNumber" use="required"/>	<xsd:attribute ref="com:sequenceNumber" use="required"/>
<xsd:attribute ref="com:id"/>	<xsd:attribute ref="com:id"/>
	<xsd:attribute ref="uscom:activeIndicator"/>
<xsd:complexType>	<xsd:complexType>
<xsd:element>	
<xsd:choice>	
<xsd:complexType>	
<xsd:element ref="pat:ExaminerBag"/>	

Figure 7: XML instance comparison

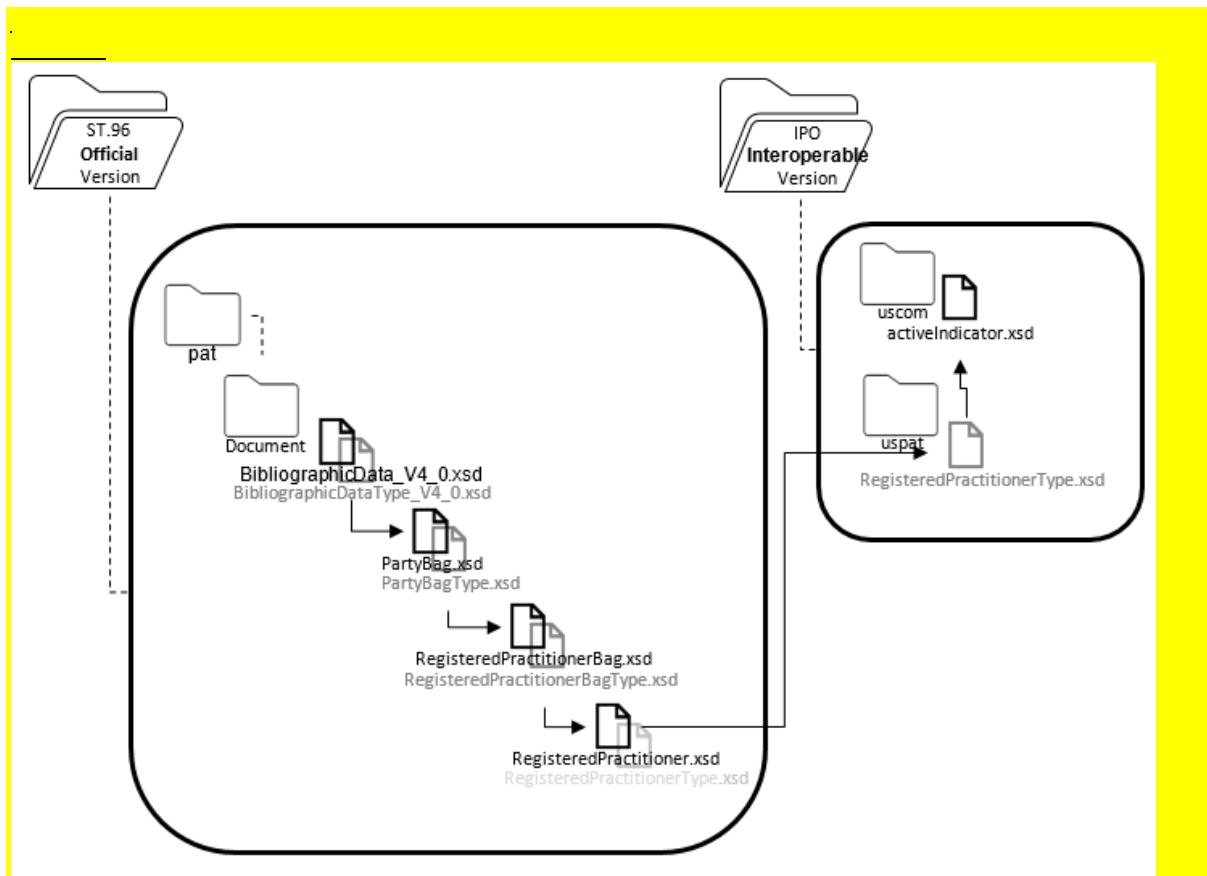


Figure 8: Graphical View

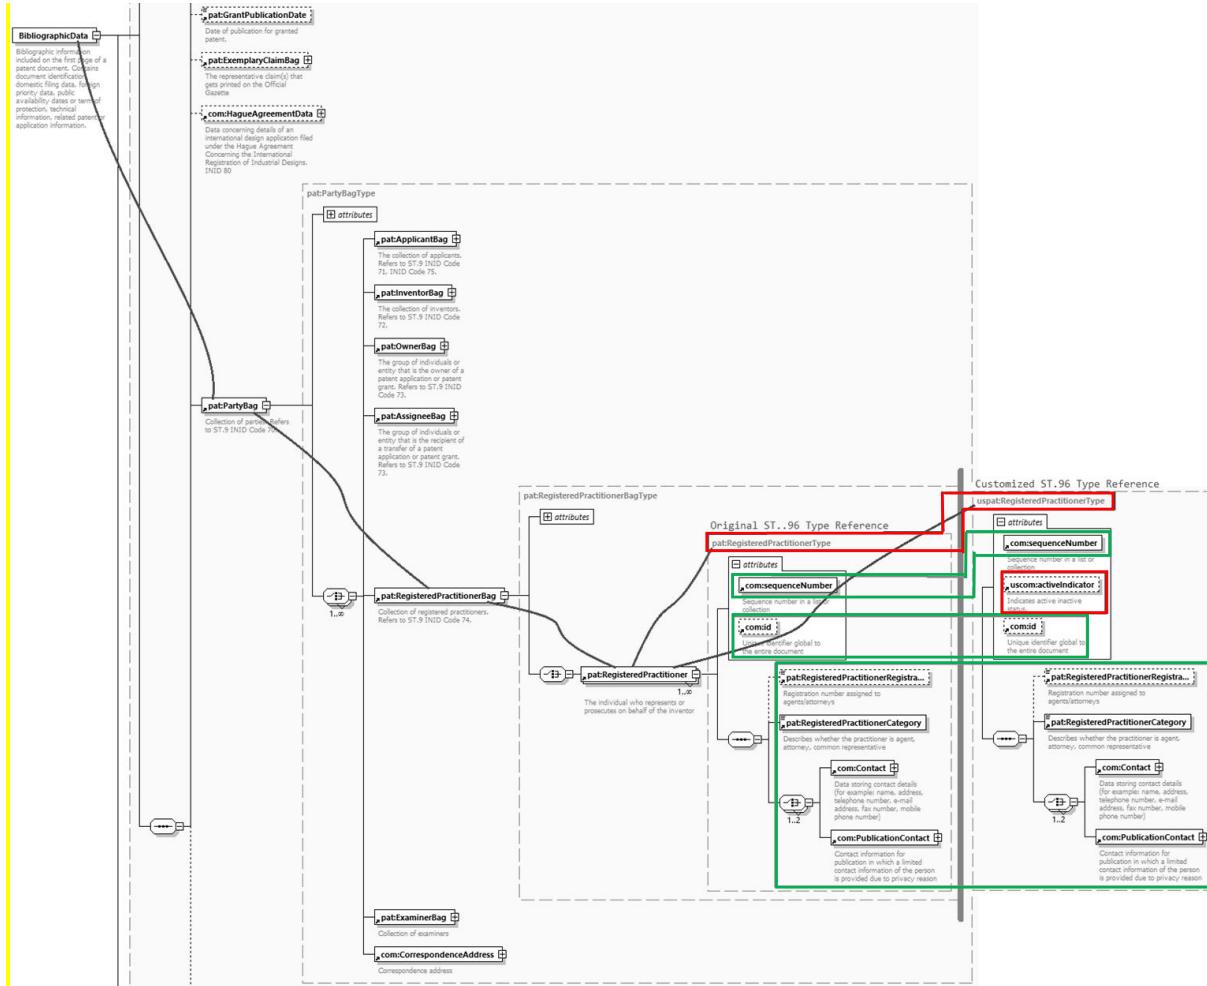


Figure 9: Updated XSD View

1.3. Remove an optional element

Not Allowed

1.4. Modify constraints

Not Allowed. Section 1.6/2.6 is an alternative approach to handle this situation by introducing a parallel component with IPO's customizations. This is considered a workaround approach, but it comes with an overhead of duplication of similar components for IPO's.

1.5. Make an element required

Not Allowed

1.6. Add new aggregate component

Patent Sample Business Case: Add a new optional aggregate component uscom:CrossReferenceLink to com:P

[Note: ST.96 has a similar component com:CrossReference but, USPTO business requirement wants to restrict the required @crossReferenceCategory attribute values unique to USPTO and eliminate the use of the broad list the ST.96 attribute provides. To handle this case and maintain an interoperable schema model USPTO created an alternative parallel component with the required enumeration entries.]

1. Create a folder called "USCommon" at the same level as "Common", "Patent", "Trademark" etc.
2. Set the target Namespace to the IPO's namespace and add new namespace entries `xmlns:xxcom`, where xx is the lower-case ST.3 Code. Each IPO is expected to version the modified components separately from WIPO because this is the IPO specific implementation. "V1_0" is shown in the following example because this is the first Office modified component.

*Note: this example uses the URN for the IPO namespace as approved at USPTO.
Other IPO's can use either the URN or URL namespace based on their internal practice.*

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:uscom="urn:us:gov:doc:uspto:common"
  targetNamespace="urn:us:gov:doc:uspto:common" elementFormDefault="qualified"
  attributeFormDefault="qualified" version="V1_0">
```

3. Define new W3C schema file `CrossReferenceLinkCategoryType.xsd`

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:uscom="urn:us:gov:doc:uspto:common"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  targetNamespace="urn:us:gov:doc:uspto:common" elementFormDefault="qualified"
  attributeFormDefault="qualified" version="V1_0">
  <xsd:simpleType name="CrossReferenceLinkCategoryType">
    <xsd:annotation>
      <xsd:documentation>Category of Cross reference link</xsd:documentation>
    </xsd:annotation>
    <xsd:restriction base="xsd:token">
      <xsd:enumeration value="USC">
        <xsd:annotation>
          <xsd:documentation>United States Code</xsd:documentation>
        </xsd:annotation>
      </xsd:enumeration>
      <xsd:enumeration value="CFR">
        <xsd:annotation>
          <xsd:documentation>Code of Federal Regulation</xsd:documentation>
        </xsd:annotation>
      </xsd:enumeration>
      <xsd:enumeration value="Form paragraph">
        <xsd:annotation>
          <xsd:documentation>Form paragraph</xsd:documentation>
        </xsd:annotation>
      </xsd:enumeration>
      <xsd:enumeration value="Chapter">
        <xsd:annotation>
          <xsd:documentation>Chapter</xsd:documentation>
        </xsd:annotation>
      </xsd:enumeration>
      <xsd:enumeration value="Section">
        <xsd:annotation>
          <xsd:documentation>Section with Chapters or section within a publication</xsd:documentation>
        </xsd:annotation>
      </xsd:enumeration>
      <xsd:enumeration value="Administrative instruction">
```

```

        <xsd:annotation>
            <xsd:documentation>Administrative
instruction</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="PCT">
        <xsd:annotation>
            <xsd:documentation>Patent Cooperation
Treaty</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="Reference link">
        <xsd:annotation>
            <xsd:documentation>Reference link, used for external
reference populated with URL</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="Examiner note">
        <xsd:annotation>
            <xsd:documentation>Examiner note, used for external
reference located in another document</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
</xsd:restriction>
</xsd:simpleType>
</xsd:schema>

```

4. Define new W3C schema file for attribute `crossReferenceLinkCategory.xsd` and reference its type with above created type definition.

```

<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:uscom="urn:us:gov:doc:uspto:common"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
targetNamespace="urn:us:gov:doc:uspto:common" elementFormDefault="qualified"
attributeFormDefault="qualified" version="V1_0">
<xsd:include schemaLocation="CrossReferenceLinkCategoryType.xsd"/>
<xsd:attribute name="crossReferenceLinkCategory"
type="uscom:CrossReferenceLinkCategoryType">
    <xsd:annotation>
        <xsd:documentation>Category of cross reference, e.g.
table.</xsd:documentation>
    </xsd:annotation>
</xsd:attribute>
</xsd:schema>

```

5. Define new W3C schema file `CrossReferenceLinkType.xsd` by referencing above created attribute

```

<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:uscom="urn:us:gov:doc:uspto:common"
xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
targetNamespace="urn:us:gov:doc:uspto:common" elementFormDefault="qualified"
attributeFormDefault="qualified" version="V1_0">
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/B.xsd"/>

```

```

<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/I.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/O.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/U.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/S.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/Sub.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/Sup.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/Br.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/Image.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/Ins.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/Del.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/id.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/idrefs.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/extRef.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/sourceURI.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/sourceSystemName.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/sourceSystemIdentifier.xsd"/>
<xsd:include schemaLocation="crossReferenceLinkCategory.xsd"/>
<xsd:complexType name="CrossReferenceLinkType" mixed="true">
  <xsd:choice minOccurs="0" maxOccurs="unbounded">
    <xsd:element ref="com:B"/>
    <xsd:element ref="com:I"/>
    <xsd:element ref="com:O"/>
    <xsd:element ref="com:U"/>
    <xsd:element ref="com:S"/>
    <xsd:element ref="com:Sub"/>
    <xsd:element ref="com:Sup"/>
    <xsd:element ref="com:Br"/>
    <xsd:element ref="com:Image"/>
    <xsd:element ref="com:Ins"/>
    <xsd:element ref="com:Del"/>
  </xsd:choice>
  <xsd:attribute ref="com:id"/>
  <xsd:attribute ref="com:idrefs"/>
  <xsd:attribute ref="com:extRef"/>
  <xsd:attribute ref="uscom:crossReferenceLinkCategory" use="required"/>
  <xsd:attribute ref="com:sourceURI"/>
  <xsd:attribute ref="com:sourceSystemName"/>
  <xsd:attribute ref="com:sourceSystemIdentifier"/>
</xsd:complexType>
</xsd:schema>

```

6. Create new W3C schema file CrossReferenceLink.xsd with above created type reference

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:uscom="urn:us:gov:doc:uspto:common"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  targetNamespace="urn:us:gov:doc:uspto:common" elementFormDefault="qualified"
  attributeFormDefault="qualified" version="V1_0">
  <xsd:include schemaLocation="CrossReferenceLinkType.xsd"/>
  <xsd:element name="CrossReferenceLink" type="uscom:CrossReferenceLinkType">
    <xsd:annotation>
      <xsd:documentation>Cross Reference Link is used to refer to another
      part of the current document or refer to something else that is outside of the
      current document related to Administrative and Legal publications. For
      referring to 'figure' which is in the same document, com:FigureReference
      should be used. For referring to 'claim' within 'claim text', ClaimReference
      should be used.
      </xsd:documentation>
    </xsd:annotation>
  </xsd:element>
</xsd:schema>
```

7. Create new W3C schema file PType.xsd

[Note: Since this is an unbounded choice type, you can add new aggregate component anywhere in the existing choice of components. But for other XSD types interoperability recommends adding newly created components to the bottom of the existing list to avoid backward compatibility issues.]

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:uscom="urn:us:gov:doc:uspto:common"
  targetNamespace="urn:us:gov:doc:uspto:common" elementFormDefault="qualified"
  attributeFormDefault="qualified" version="V1_0">
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    schemaLocation="../Common/B.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    schemaLocation="../Common/I.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    schemaLocation="../Common/O.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    schemaLocation="../Common/S.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    schemaLocation="../Common/U.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    schemaLocation="../Common/Sup.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    schemaLocation="../Common/Sub.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    schemaLocation="../Common/Image.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    schemaLocation="../Common/SmallCapital.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    schemaLocation="../Common/Ins.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    schemaLocation="../Common/Del.xsd"/>
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    schemaLocation="../Common/OCRConfidenceData.xsd"/>
```

```

<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/Br.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/UL.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/OL.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/Pre.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/DL.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/Math.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/ChemicalFormulae.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/InlineFormula.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/PatentCitation.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/NPLCitation.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/FigureReference.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/CrossReference.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/BioDeposit.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/Table.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/id.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../Common/pNumber.xsd"/>
<xsd:include schemaLocation="CrossReferenceLink.xsd"/>
<xsd:complexType name="PType" mixed="true">
  <xsd:choice minOccurs="0" maxOccurs="unbounded">
    <xsd:element ref="com:B"/>
    <xsd:element ref="com:I"/>
    <xsd:element ref="com:O"/>
    <xsd:element ref="com:S"/>
    <xsd:element ref="com:U"/>
    <xsd:element ref="com:Sup"/>
    <xsd:element ref="com:Sub"/>
    <xsd:element ref="com:Image"/>
    <xsd:element ref="com:SmallCapital"/>
    <xsd:element ref="com:Ins"/>
    <xsd:element ref="com:Del"/>
    <xsd:element ref="com:OCRConfidenceData"/>
    <xsd:element ref="com:Br"/>
    <xsd:element ref="com:UL"/>
    <xsd:element ref="com:OL"/>
    <xsd:element ref="com:Pre"/>
    <xsd:element ref="com:DL"/>
    <xsd:element ref="com:Math"/>
    <xsd:element ref="com:ChemicalFormulae"/>
    <xsd:element ref="com:InlineFormula"/>
    <xsd:element ref="com:PatentCitation"/>
  </xsd:choice>
</xsd:complexType>

```

```
<xsd:element ref="com:NPLCitation"/>
<xsd:element ref="com:FigureReference"/>
<xsd:element ref="com:CrossReference"/>
<xsd:element ref="uscom:CrossReferenceLink"/>
<xsd:element ref="com:BioDeposit"/>
<xsd:element ref="com:Table"/>
</xsd:choice>
<xsd:attribute ref="com:id"/>
<xsd:attribute ref="com:pNumber"/>
</xsd:complexType>
</xsd:schema>
```

8. Update ST.96 P.xsd to refer IPO customized PType.xsd with appropriate import statement.

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:uscom="urn:us:gov:doc:uspto:common"
  targetNamespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V4_0">
  <xsd:import namespace="urn:us:gov:doc:uspto:common"
    schemaLocation="../USCommon/PType.xsd"/>
  <xsd:element name="P" type="uscom:PType">
    <xsd:annotation>
      <xsd:documentation>Paragraph</xsd:documentation>
    </xsd:annotation>
  </xsd:element>
</xsd:schema>
```

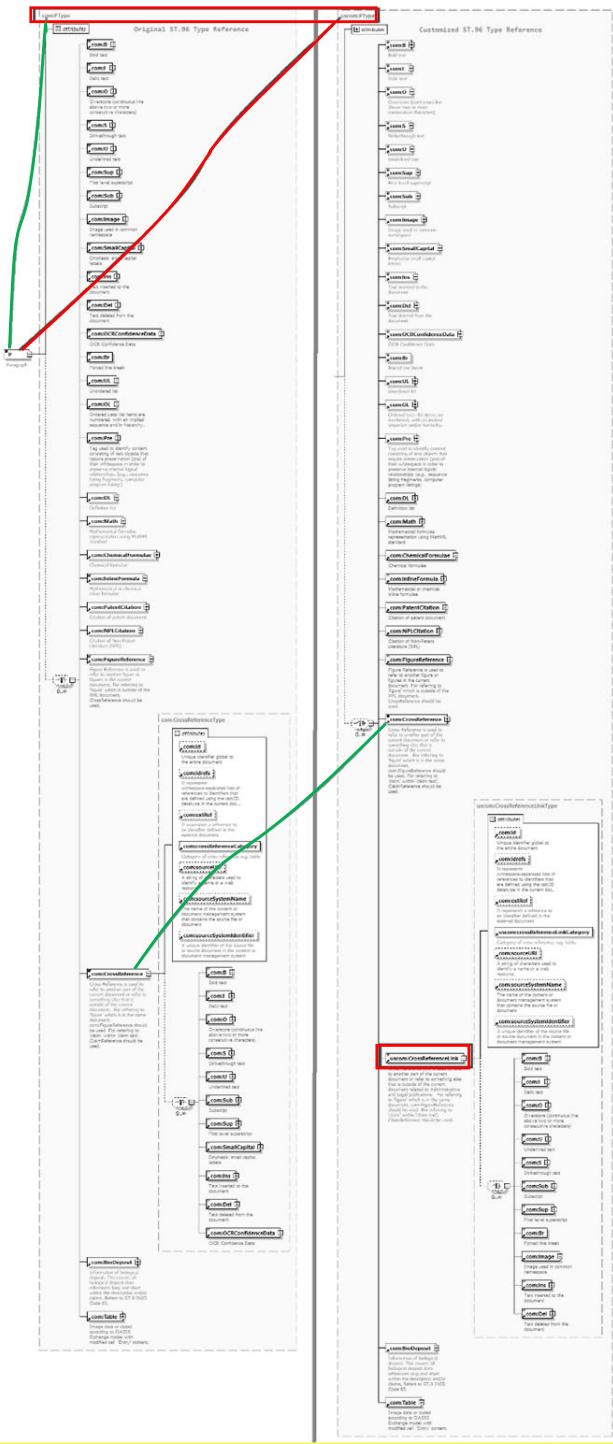


Figure 10: Updated XSD View

1.7. Add new document components

Not Allowed

1.8. Remove an existing element and add a new element

Not Allowed

2. Design-Stage Schemas - Flattened Schemas

2.1. Add an optional element

Patent Sample Business Case: Add an optional element `ContractRole` to the `dgn:Applicant` Structure.

1. Create a new W3C schema file, `RUDesign_V1_0.xsd` in the same folder as `DesignApplication_V4_0.xsd`.
2. Set the target Namespace to the IPO's namespace and add the new namespace `xmlns:xxdgn`, where xx is an ST.3 Code.

```
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:dgn="http://www.wipo.int/standards/XMLSchema/ST96/Design"
  xmlns:rudgn="http://rupto.ru/standards/XMLSchema/ST96/Design"
  targetNamespace="http://rupto.ru/standards/XMLSchema/ST96/Design"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V1_0">
</xsd:schema>
```

3. Define new element type definition `ContractRoleType` in `RUDesign_V1_0.xsd` as below:

```
<xsd:simpleType name="ContractRoleType">
  <xsd:restriction base="xsd:token">
    <xsd:enumeration value="Customer">
      <xsd:annotation>
        <xsd:documentation>Indicates whether the entity
is the contract customer</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="Implementor">
      <xsd:annotation>
        <xsd:documentation>Indicates whether the entity
is the contract implementor</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
  </xsd:restriction>
</xsd:simpleType>
```

4. Define new element definition `ContractRole.xsd` in `RUDesign_V1_0.xsd` by referring `rudgn:ContractRoleType.xsd` created above

```
<xsd:element name="ContractRole" type="rudgn:ContractRoleType">
  <xsd:annotation>
    <xsd:documentation>Applicant's role in
contract</xsd:documentation>
  </xsd:annotation>
</xsd:element>
```

5. Define new element type definition `ApplicantType.xsd` with two imports needed in `RUDesign_V1_0.xsd` as below:

```
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  schemaLocation="ST96_Common_V4_0.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Design"
  schemaLocation="DesignApplication_V4_0.xsd"/>
```

```

<xsd:complexType name="ApplicantType">
    <xsd:sequence>
        <xsd:element ref="com:NationalityCode" minOccurs="0"/>
        <xsd:element ref="com:LegalEntityName" minOccurs="0"/>
        <xsd:element ref="com:IncorporationCountryCode"
minOccurs="0"/>
        <xsd:element ref="com:IncorporationState" minOccurs="0"/>
        <xsd:element ref="com:CommentText" minOccurs="0"/>
        <xsd:element ref="dgn:Entitlement" minOccurs="0"/>
        <xsd:element ref="dgn:ApplicantContractingParty"
minOccurs="0"/>
        <xsd:element ref="com:Version" minOccurs="0"/>
        <xsd:choice maxOccurs="unbounded">
            <xsd:element ref="com:PartyIdentifier"/>
            <xsd:element ref="com:Contact"/>
            <xsd:element ref="com:PublicationContact"/>
        </xsd:choice>
        <xsd:element ref="rudgn:ContractRole" minOccurs="0"/>
    </xsd:sequence>
    <xsd:attribute ref="com:operationCategory"/>
    <xsd:attribute ref="com:sequenceNumber"/>
</xsd:complexType>

```

```

<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
xmlns:dgn="http://www.wipo.int/standards/XMLSchema/ST96/Design"
xmlns:rudgn="http://rupro.ru/standards/XMLSchema/ST96/Design"
targetNamespace="http://rupro.ru/standards/XMLSchema/ST96/Design"
elementFormDefault="qualified" attributeFormDefault="qualified"
version="V1_0">
    <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="ST96 Common V4_0.xsd"/>
    <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Design"
schemaLocation="DesignApplication V4_0.xsd"/>
    <xsd:simpleType name="ContractRoleType">
        <xsd:restriction base="xsd:token">
            <xsd:enumeration value="Customer">
                <xsd:annotation>
                    <xsd:documentation>Indicates whether the entity
is the contract customer</xsd:documentation>
                </xsd:annotation>
            </xsd:enumeration>
            <xsd:enumeration value="Implementor">
                <xsd:annotation>
                    <xsd:documentation>Indicates whether the entity
is the contract implementor</xsd:documentation>
                </xsd:annotation>
            </xsd:enumeration>
        </xsd:restriction>
    </xsd:simpleType>
    <xsd:element name="ContractRole" type="rudgn:ContractRoleType">
        <xsd:annotation>
            <xsd:documentation>Applicant's role in
contract</xsd:documentation>
        </xsd:annotation>
    </xsd:element>
    <xsd:complexType name="ApplicantType">
        <xsd:sequence>
            <xsd:element ref="com:NationalityCode" minOccurs="0"/>
            <xsd:element ref="com:LegalEntityName" minOccurs="0"/>

```

```

<xsd:element ref="com:IncorporationCountryCode"
minOccurs="0"/>
  <xsd:element ref="com:IncorporationState" minOccurs="0"/>
  <xsd:element ref="com:CommentText" minOccurs="0"/>
  <xsd:element ref="dgn:Entitlement" minOccurs="0"/>
  <xsd:element ref="dgn:ApplicantContractingParty"
minOccurs="0"/>
  <xsd:element ref="com:Version" minOccurs="0"/>
  <xsd:choice maxOccurs="unbounded">
    <xsd:element ref="com:PartyIdentifier"/>
    <xsd:element ref="com:Contact"/>
    <xsd:element ref="com:PublicationContact"/>
  </xsd:choice>
  <xsd:element ref="rudgn:ContractRole" minOccurs="0"/>
</xsd:sequence>
<xsd:attribute ref="com:operationCategory"/>
<xsd:attribute ref="com:sequenceNumber"/>
</xsd:complexType>
</xsd:schema>

```

6. Update Applicant definition in DesignApplication V4_0.xsd (ST.96 Design XSD flattened), to update Type, reference to IPO customized ApplicationType with appropriate namespace reference and import as listed below

```

<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:dgn="http://www.wipo.int/standards/XMLSchema/ST96/Design"
  xmlns:rudgn="http://rupto.ru/standards/XMLSchema/ST96/Design"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://www.wipo.int/standards/XMLSchema/ST96/Design"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V4_0">
  <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    schemaLocation="ST96_V4_0_Common.xsd"/>
  <xsd:import namespace="http://rupto.ru/standards/XMLSchema/ST96/Design"
    schemaLocation="RUDesign_V1_0.xsd"/>
  <xsd:element name="Applicant" type="rudgn:ApplicantType">
    <xsd:annotation>
      <xsd:documentation>Applicant or holder
      details</xsd:documentation>
    </xsd:annotation>
  </xsd:element>
</xsd:schema>

```

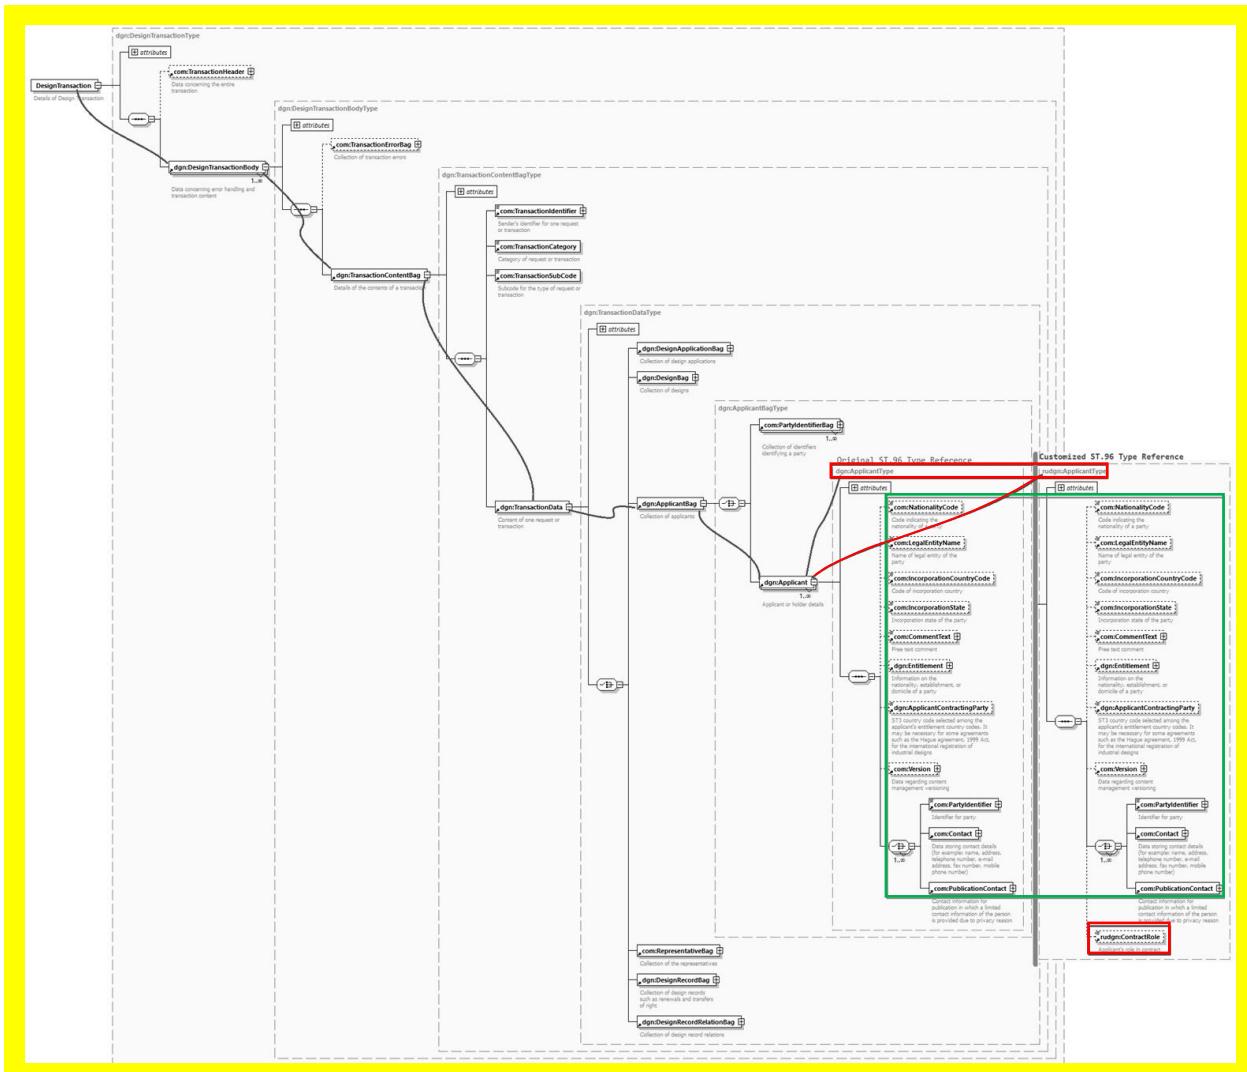


Figure 11: Updated XSD View

2.2. Add an optional attribute

Patent Sample Business Case: Add an optional attribute activeIndicator to the pat:RegisteredPractitioner Structure.

1. Create a new W3C schema file, `USCommon_V1_0.xsd` at the same level as `ST96_V4_0_Common.xsd`.
 2. Set the target Namespace to the IPO's namespace and add new namespace entries `xmlns:xxcom`, where `xx` is the lower-case ST.3 Code. Each IPO is expected to version the modified components separately from WIPO because this is the IPO specific implementation. “`V1_0`” is shown in the following example because this is the first Office modified component.

Note: this example uses URN for IPO namespace as approved at USPTO.

Other IPO's can use either URN or URL namespace based on their internal practice.

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
```

```

< xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:uscom="urn:us:gov:doc:uspto:common"
  targetNamespace="urn:us:gov:doc:uspto:common" elementFormDefault="qualified"
  attributeFormDefault="qualified" version="V1_0">

</xsd:schema>

```

3. Define new attribute definition `activeIndicator` as `xsd:Boolean` in `USCommon_V1_0.xsd` file


```

<xsd:attribute name="activeIndicator" type="xsd:boolean">
    <xsd:annotation>
        <xsd:documentation>Indicates active/inactive status.</xsd:documentation>
    </xsd:annotation>
</xsd:attribute>

```
4. Create a new W3C schema file `USPatent_V1_0.xsd` at the same level as `USCommon_V1_0.xsd`.
5. Redefine `pat:RegisteredPractitionerType.xsd` structure with new IPO added attribute towards the end of existing components as shown below:

```

<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:uspat="urn:us:gov:doc:uspto:patent"
  xmlns:uscom="urn:us:gov:doc:uspto:common"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  targetNamespace="urn:us:gov:doc:uspto:patent" elementFormDefault="qualified"
  attributeFormDefault="qualified" version="V8_0">
    <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
      schemaLocation="BibliographicData V4_0.xsd"/>
    <xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
      schemaLocation="ST96 Common V4_0.xsd"/>
    <xsd:import namespace="urn:us:gov:doc:uspto:common"
      schemaLocation="USCommon_V1_0.xsd"/>
    <xsd:complexType name="RegisteredPractitionerType">
      <xsd:sequence>
        <xsd:element ref="pat:RegisteredPractitionerRegistrationNumber" minOccurs="0"/>
        <xsd:element ref="pat:RegisteredPractitionerCategory"/>
        <xsd:choice maxOccurs="2">
          <xsd:element ref="com>Contact"/>
          <xsd:element ref="com:PublicationContact"/>
        </xsd:choice>
      </xsd:sequence>
      <xsd:attribute ref="com:sequenceNumber" use="required"/>
      <xsd:attribute ref="uscom:activeIndicator"/>
      <xsd:attribute ref="com:id"/>
    </xsd:complexType>
</xsd:schema>

```

6. Update `BibliographicData V4_0.xsd`, file `RegisteredPractitioner` definition to refer IPO customized `RegisteredPractitionerType` with appropriate namespace reference and import statement.

```

<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  xmlns:uspat="urn:us:gov:doc:uspto:patent"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V4_0">

```

```

<xsd:import namespace="urn:us:gov:doc:uspto:patent"
schemaLocation="USPatent_V1_0.xsd"/>
<xsd:element name="RegisteredPractitioner"
type="uspat:RegisteredPractitionerType">
  <xsd:annotation>
    <xsd:documentation>The individual who represents or prosecutes
on behalf of the inventor</xsd:documentation>
  </xsd:annotation>
</xsd:element>
</xsd:schema>
  
```

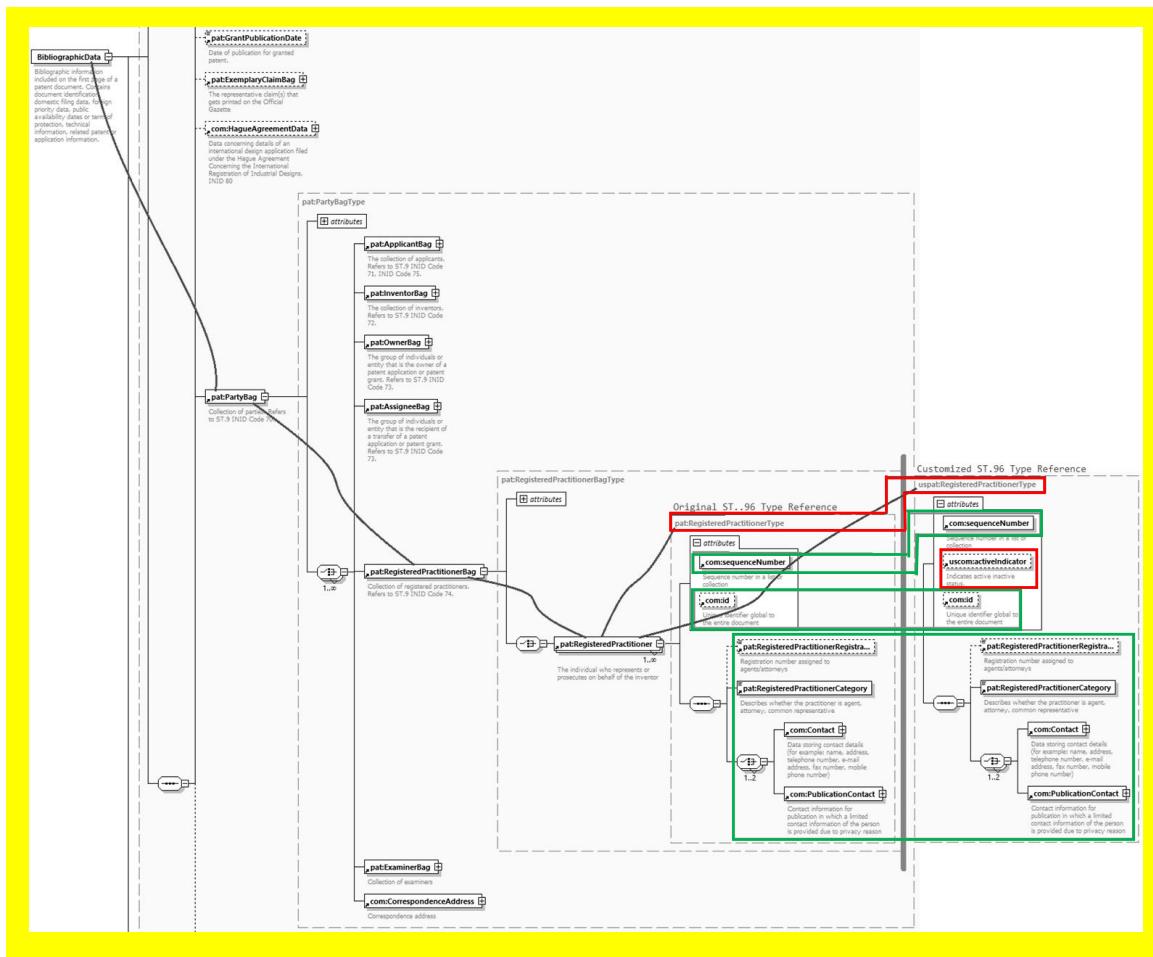


Figure 12: Updated XSD View

2.3. Remove an optional element

Not Allowed

2.4. Modify constraints

Not Allowed. Section 1.6/2.6 is an alternative approach to handle this situation by introducing a parallel component with IPO's customizations. This is considered as a workaround, but it comes with an overhead of duplication of similar components to IPOs.

2.5. Make an element required

Not Allowed

2.6. Add new aggregate component

Patent Sample Business Case: Add a new optional aggregate component uscom:CrossReferenceLink to com:p

1. Create a new W3C schema file, USCommon_V1_0.xsd at the same level as ST96_V4_0_Common.xsd.
2. Set the target Namespace to the IPO's namespace and add new namespace entries xmlns:xxcom, where xx is the lower-case ST.3 Code. Each IPO is expected to version the modified components separate from WIPO because this is the IPO specific implementation. "V1_0" is shown in the following example because this is the first Office modified component.

Please note that the example uses URN for IPO namespace as approved at USPTO.
 Other IPO's can use either URN or URL namespace based on their internal practice.

```

<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:uscom="urn:us:gov:doc:uspto:common"
  targetNamespace="urn:us:gov:doc:uspto:common" elementFormDefault="qualified"
  attributeFormDefault="qualified" version="V1_0">

</xsd:schema>
  
```

3. Define CrossReferenceLinkCategoryType definition in USCommon_V1_0.xsd.

```

<xsd:simpleType name="CrossReferenceLinkCategoryType">
  <xsd:annotation>
    <xsd:documentation>Category of Cross reference
link</xsd:documentation>
  </xsd:annotation>
  <xsd:restriction base="xsd:token">
    <xsd:enumeration value="USC">
      <xsd:annotation>
        <xsd:documentation>United State
Code</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="CFR">
      <xsd:annotation>
        <xsd:documentation>Code of Federal
Regulation</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="Form paragraph">
      <xsd:annotation>
        <xsd:documentation>Form paragraph</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="Chapter">
      <xsd:annotation>
        <xsd:documentation>Chapter</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="Section">
      <xsd:annotation>
        <xsd:documentation>Section with Chapters or section
within a publication</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="Administrative instruction">
      <xsd:annotation>
        
```

```

        <xsd:documentation>Administrative
instruction</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="PCT">
        <xsd:annotation>
            <xsd:documentation>Patent Cooperation
Treaty</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="Reference link">
        <xsd:annotation>
            <xsd:documentation>Reference link, used for external
reference populated with URL</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="Examiner note">
        <xsd:annotation>
            <xsd:documentation>Examiner note, used for external
reference located in another document</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
</xsd:restriction>
</xsd:simpleType>

```

4. Define new `crossReferenceLinkCategory` attribute definition in `USCommon_V1_0.xsd`.

```

<xsd:attribute name="crossReferenceLinkCategory"
type="uscom:CrossReferenceLinkCategoryType">
    <xsd:annotation>
        <xsd:documentation>Category of cross reference, e.g.
table.</xsd:documentation>
    </xsd:annotation>
</xsd:attribute>

```

5. Define new `CrossReferenceLinkType` definition in `USCommon_V1_0.xsd` file with appropriate namespace and imports to ST.96 Common references.

```

<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="ST96_Common_V4_0.xsd"/>      (← Towards the top of the file)

<xsd:complexType name="CrossReferenceLinkType" mixed="true">
    <xsd:choice minOccurs="0" maxOccurs="unbounded">
        <xsd:element ref="com:B"/>
        <xsd:element ref="com:I"/>
        <xsd:element ref="com:O"/>
        <xsd:element ref="com:U"/>
        <xsd:element ref="com:S"/>
        <xsd:element ref="com:Sub"/>
        <xsd:element ref="com:Sup"/>
        <xsd:element ref="com:Br"/>
        <xsd:element ref="com:Image"/>
        <xsd:element ref="com:Ins"/>
        <xsd:element ref="com:Del"/>
    </xsd:choice>
    <xsd:attribute ref="com:id"/>
    <xsd:attribute ref="com:idrefs"/>
    <xsd:attribute ref="com:extRef"/>
    <xsd:attribute ref="uscom:crossReferenceLinkCategory" use="required"/>
    <xsd:attribute ref="com:sourceURI"/>
    <xsd:attribute ref="com:sourceSystemName"/>
    <xsd:attribute ref="com:sourceSystemIdentifier"/>

```

```
</xsd:complexType>
```

6. Create new CrossReferenceLink.xsd definition in USCommon_V1_0.xsd

```
<xsd:element name="CrossReferenceLink" type="uscom:CrossReferenceLinkType">
  <xsd:annotation>
    <xsd:documentation>Cross Reference Link is used to refer to another part of the current document or refer to something else that is outside of the current document related to Administrative and Legal publications. For referring to 'figure' which is in the same document, com:FigureReference should be used. For referring to 'claim' within 'claim text', ClaimReference should be used.</xsd:documentation>
  </xsd:annotation>
</xsd:element>
```

7. Create new PType.xsd definition in USCommon_V1_0.xsd.

[Note: Since this is an unbounded choice type, you can add newly inserted aggregate component anywhere in the existing choice of components. But for other XSD types interoperability recommends adding newly created components to the bottom of the existing list to avoid backward compatibility issues.]

```
<xsd:complexType name="PType" mixed="true">
  <xsd:choice minOccurs="0" maxOccurs="unbounded">
    <xsd:element ref="com:B"/>
    <xsd:element ref="com:I"/>
    <xsd:element ref="com:O"/>
    <xsd:element ref="com:S"/>
    <xsd:element ref="com:U"/>
    <xsd:element ref="com:Sup"/>
    <xsd:element ref="com:Sub"/>
    <xsd:element ref="com:Image"/>
    <xsd:element ref="com:SmallCapital"/>
    <xsd:element ref="com:Ins"/>
    <xsd:element ref="com:Del"/>
    <xsd:element ref="com:OCRConfidenceData"/>
    <xsd:element ref="com:Br"/>
    <xsd:element ref="com:UL"/>
    <xsd:element ref="com:OL"/>
    <xsd:element ref="com:Pre"/>
    <xsd:element ref="com:DL"/>
    <xsd:element ref="com:Math"/>
    <xsd:element ref="com:ChemicalFormulae"/>
    <xsd:element ref="com:InlineFormula"/>
    <xsd:element ref="com:PatentCitation"/>
    <xsd:element ref="com:NPLCitation"/>
    <xsd:element ref="com:FigureReference"/>
    <xsd:element ref="com:CrossReference"/>
    <xsd:element ref="uscom:CrossReferenceLink"/>
    <xsd:element ref="com:BioDeposit"/>
    <xsd:element ref="com:Table"/>
  </xsd:choice>
  <xsd:attribute ref="com:id"/>
  <xsd:attribute ref="com:pNumber"/>
</xsd:complexType>
```

8. Update definition of P in ST96_Common_V4_0.xsd to refer IPO customized PType.xsd with appropriate import statement to IPO namespace reference

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:mathml="http://www.w3.org/1998/Math/MathML" xmlns:tbl="http://www.oasis-open.org/tables/exchange/1.0" xmlns:uscom="urn:us:gov:doc:uspto:common"
  targetNamespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V4_0">
  <xsd:import namespace="urn:us:gov:doc:uspto:common"
    schemaLocation="USCommon_V1_0.xsd"/> (← Towards the top of the file)

  <xsd:element name="P" type="uscom:PType">
    <xsd:annotation>
      <xsd:documentation>Paragraph</xsd:documentation>
    </xsd:annotation>
  </xsd:element>
```

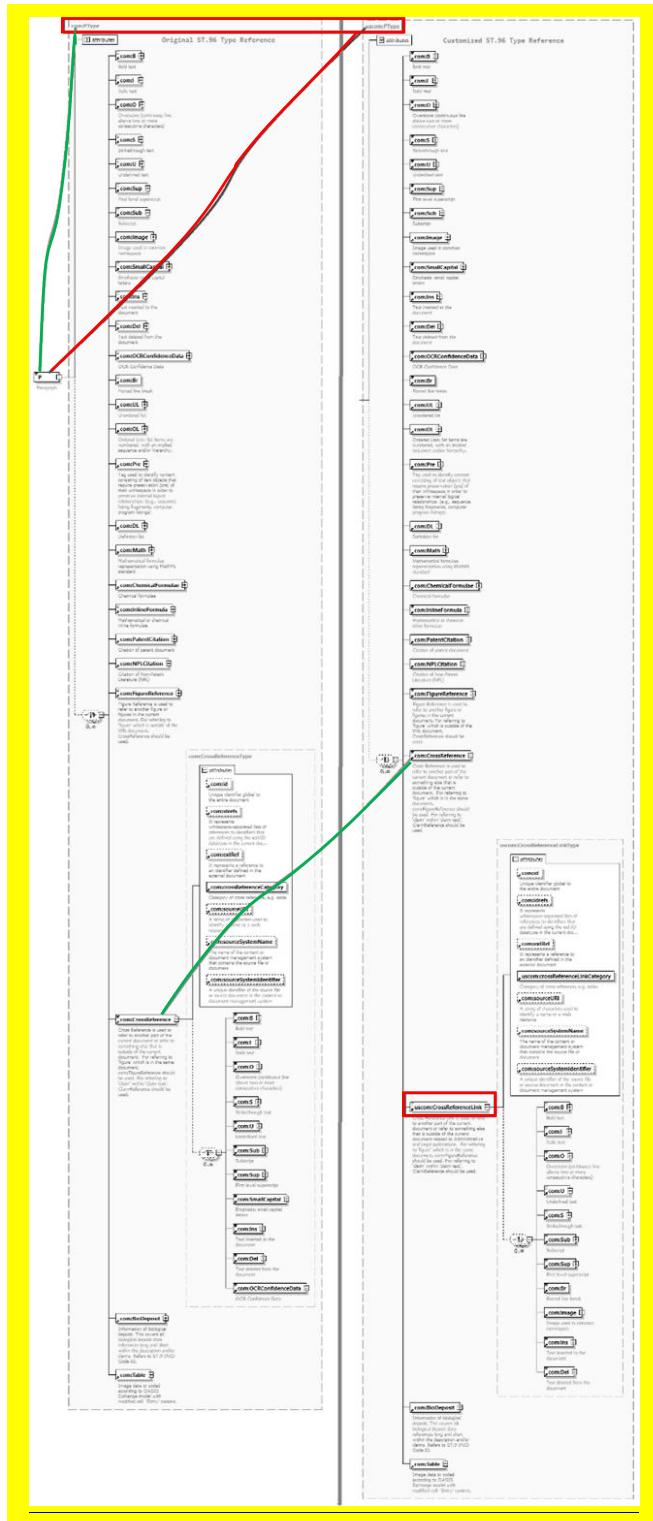


Figure 13: Updated XSD View

2.7. Add new document components

Not Allowed

2.8. Remove an existing element and add a new element

Not Allowed

APPENDIX B - EXAMPLES OF ST.96 CONFORMANT (Subset) SCHEMAS

The following examples are listed to show how developers define ST.96 conformant schemas. Designing for conformance applies primarily to restrictions which are:

- Subsets of the Schema model — restricting the number of Components in a Schema; and
- Constraints on content — restricting the possible values a Component can have.

1. Design-Stage Schemas - Modular Schemas

1.1. Add an optional element

Same as Appendix A section 1.1

1.2. Add an optional attribute

Same as Appendix A section 1.2

1.3. Remove an optional element

Patent Sample Business Case: Remove optional element UPOVCode from the PlantName Structure.

1. Create a folder called “USPatent” at the same level as “Patent”, “Trademark”, “Common” etc.
2. Under USPatent, create subfolders “Document”
3. Under “USPatent” folder, create a new W3C schema file for Type, PlantNameType.xsd.
4. Set the target Namespace to the IPO’s namespace and add new namespace entries `xmlns:xxpat`, where `xx` is the lower-case ST.3 Code. Each IPO is expected to version the modified components separate from WIPO because this is the IPO specific implementation. “V1_0” is shown in the following example because this is the first Office modified component.

Please note that the example uses URN for IPO namespace as approved at USPTO. Other IPO’s can use either URN or URL namespace based on their internal practice.

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:uspat="urn:us:gov:doc:uspto:patent"
  targetNamespace="urn:us:gov:doc:uspto:patent" elementFormDefault="qualified"
  attributeFormDefault="qualified" version="V1_0">
```

5. Import ST.96 Components which are needed to define a new Type PlantNameType.

```
<xsd:import
  namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  schemaLocation=".../Common/id.xsd"/>
<xsd:import
  namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  schemaLocation=".../Patent/BotanicalName.xsd"/>
<xsd:import
  namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  schemaLocation=".../Patent/PlantCommonName.xsd"/>
```

6. Declare the new Complex Type `PlantNameType` as shown below, which refers to existing elements with the exception of `UPOVCode`.

```

<xsd:complexType name="PlantNameType">
  <xsd:choice maxOccurs="unbounded">
    <xsd:element ref="pat:BotanicalName"/>
    <xsd:element ref="pat:PlantCommonName"/>
  </xsd:choice>
  <xsd:attribute ref="com:id"/>
</xsd:complexType> </xsd:schema>
  
```

7.

7. Update ST.96 schema file, `PlantName.xsd` in the Patent folder.
8. Declare IPO namespace. Each IPO is expected to version the modified components separate from WIPO because this is the ~~Office~~ IPO specific implementation. "V1_0" is shown in the following example because this is the first Office modified component.

```

<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:uspat="urn:us:gov:doc:uspto:patent"
  targetNamespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V1_0">
  
```

9.

9. Import the schema file in which the new IPO Type was defined, `PlantNameType.xsd`.

```

<xsd:import namespace="urn:us:gov:doc:uspto:patent"
  schemaLocation="..\USPatent\PlantNameType.xsd"/>
  
```

10.

10. Update new IPO namespace reference to corresponding Type above.

```

<xsd:element name="PlantName" type="uspat:PlantNameType">
  <xsd:annotation>
    <xsd:documentation>The name of plant</xsd:documentation>
  </xsd:annotation>
</xsd:element> </xsd:schema>
  
```

11.

11. The final content model design is shown below in Figure 14:

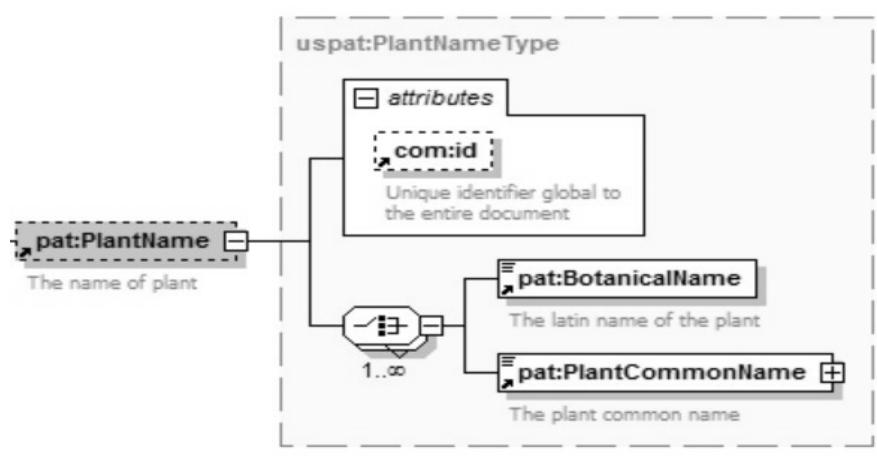


Figure 14: uspat:PlantName

1.4. Modify constraints

Patent Sample Business Case: Alter (Restrict to IPO specific values) com:CrossReferenceCategory enumeration entries to meet IPO's business need.

1. Create a folder called “USCommon” at the same level as “Common”, “Patent”, “Trademark” etc.
2. Set the target Namespace to the IPO’s namespace and add new namespace entries `xmlns:xxcom`, where `xx` is the lower-case ST.3 Code. Each IPO is expected to version the modified components separate from WIPO because this is the IPO specific implementation. “V1_0” is shown in the following example because this is the first Office modified component.

Please note that the example uses URN for IPO namespace as approved at USPTO.
Other IPO’s can use either URN or URL namespace based on their internal practice.

```

<?xml version="1.2 Design-Stage Schemas - Modular Schemas: 0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:uscom="urn:us:gov:doc:uspto:common"
  targetNamespace="urn:us:gov:doc:uspto:common" elementFormDefault="qualified"
  attributeFormDefault="qualified" version="V1_0">
  
```

3. Define new W3C schema file CrossReferenceCategoryType.xsd

```

<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:uscom="urn:us:gov:doc:uspto:common"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  targetNamespace="urn:us:gov:doc:uspto:common" elementFormDefault="qualified"
  attributeFormDefault="qualified" version="V1_0">
  <xsd:simpleType name="CrossReferenceCategoryType">
    <xsd:annotation>
      <xsd:documentation>Category of Cross reference</xsd:documentation>
    </xsd:annotation>
  
```

```

<xsd:restriction base="xsd:token">
    <xsd:enumeration value="USC">
        <xsd:annotation>
            <xsd:documentation>United State
Code</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="CFR">
        <xsd:annotation>
            <xsd:documentation>Code of Federal
Regulation</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="Form paragraph">
        <xsd:annotation>
            <xsd:documentation>Form paragraph</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="Chapter">
        <xsd:annotation>
            <xsd:documentation>Chapter</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="Section">
        <xsd:annotation>
            <xsd:documentation>Section with Chapters or section
within a publication</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="Administrative instruction">
        <xsd:annotation>
            <xsd:documentation>Administrative
instruction</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="PCT">
        <xsd:annotation>
            <xsd:documentation>Patent Cooperation
Treaty</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="Reference link">
        <xsd:annotation>
            <xsd:documentation>Reference link, used for external
reference populated with URL</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="Examiner note">
        <xsd:annotation>
            <xsd:documentation>Examiner note, used for external
reference located in another document</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
</xsd:restriction>
</xsd:simpleType>

```

</xsd:schema>

4. Update ST.96 crossReferenceCategory.xsd to refer IPO customized CrossReferenceCategoryType.xsd with an appropriate import statement.

```

<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:uscom="urn:us:gov:doc:uspto:common"
  targetNamespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V4_0">
  <xsd:import namespace="urn:us:gov:doc:uspto:common"
    schemaLocation="../USCommon/CrossReferenceCategoryType.xsd"/>
  <xsd:element name="CrossReferenceCategory"
    type="uscom:CrossReferenceCategoryType">
    <xsd:annotation>
      <xsd:documentation>Category of cross reference, e.g.
        table</xsd:documentation>
    </xsd:annotation>
  </xsd:element>
</xsd:schema>

```

Pre and Post-Update XSD differences:

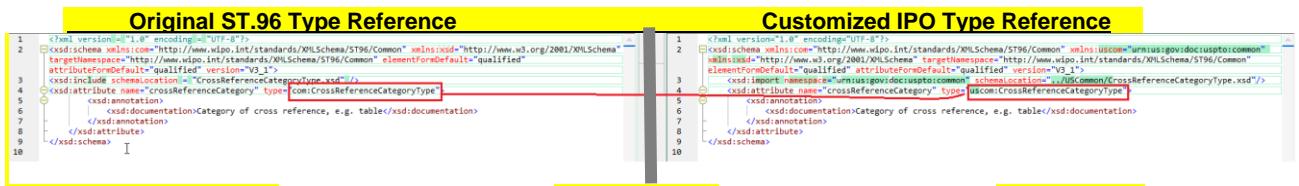


Figure 15: Comparison after applying design rules

1.5. Make an element required

Patent Sample Business Case: Make ClaimTotalQuantity required in the BibliographicData Structure.

1. Create a folder called "USPatent" at the same level as "Patent", "Trademark", "Common" etc.
2. Create a new W3C schema file for Type called BibliographicDataType.xsd in folder "USPatent" --> "Document".
3. Set the target Namespace to the IPO's namespace and add the new namespace `xmlns:xxpat`, where xx is an ST.3 Code.

```

<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:uspat="urn:us:gov:doc:uspto:patent"
  targetNamespace="urn:us:gov:doc:uspto:patent" elementFormDefault="qualified"
  attributeFormDefault="qualified" version="V1_0">

```

4.

4. Import the ST.96 Components which are needed to define a new Type BibliographicDataType.

```

<xsd:import
  namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  schemaLocation="../../Patent/PatentPublicationIdentification.xsd"/>

```

```
<xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"  
schemaLocation="../../Patent/ApplicationIdentification.xsd"/>  
    <xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"  
schemaLocation="../../Patent/PatentGrantIdentification.xsd"/>  
        <xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"  
schemaLocation="../../Patent/PriorityClaimBag.xsd"/>  
            <xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"  
schemaLocation="../../Patent/GrantTerm.xsd"/>  
                <xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"  
schemaLocation="../../Patent/PreClassificationText.xsd"/>  
                    <xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"  
schemaLocation="../../Patent/PatentClassificationBag.xsd"/>  
                        <xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"  
schemaLocation="../../Patent/InventionTitleBag.xsd"/>  
                            <xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"  
schemaLocation="../../Patent/PlantName.xsd"/>  
                                <xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"  
schemaLocation="../../Patent/ReferenceCitationBag.xsd"/>  
                                    <xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"  
schemaLocation="../../Patent/ClaimTotalQuantity.xsd"/>  
                                        <xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"  
schemaLocation="../../Patent/SearchField.xsd"/>  
                                            <xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"  
schemaLocation="../../Patent/FigureBag.xsd"/>  
                                                <xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"  
schemaLocation="../../Patent/RelatedDocumentBag.xsd"/>  
                                                    <xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"  
schemaLocation="../../Patent/ProvisionalGrantPublicationDate.xsd"/>  
                                                        <xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"  
schemaLocation="../../Patent/GrantPublicationDate.xsd"/>  
                                                            <xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"  
schemaLocation="../../Patent/ExemplaryClaimBag.xsd"/>  
                                                                <xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"  
schemaLocation="../../Patent/PartyBag.xsd"/>  
                                                                    <xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"  
schemaLocation="../../Patent/InternationalFilingData.xsd"/>  
                                                                        <xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
```

```
schemaLocation=".../.../Patent/RegionalFilingData.xsd"/>
    <xsd:import
        namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
        schemaLocation=".../.../Patent/InternationalPublishingData.xsd"/>
        <xsd:import
            namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
            schemaLocation=".../.../Patent/RegionalPublishingData.xsd"/>
            <xsd:import
                namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
                schemaLocation=".../.../Patent/PatentFamily.xsd"/>
                <xsd:import
                    namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
                    schemaLocation=".../.../Common/BioDeposit.xsd"/>
                    <xsd:import
                        namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
                        schemaLocation=".../.../Patent/PlainLanguageDesignationText.xsd"/>
                        <xsd:import
                            namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
                            schemaLocation=".../.../Common/FilingLanguageCode.xsd"/>
                            <xsd:import
                                namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
                                schemaLocation=".../.../Common/PublicationLanguageCode.xsd"/>
                                <xsd:import
                                    namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
                                    schemaLocation=".../.../Common/HagueAgreementData.xsd"/>
                                    <xsd:import
                                        namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
                                        schemaLocation=".../.../Patent/StateDesignation.xsd"/>
                                        <xsd:import
                                            namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
                                            schemaLocation=".../.../Patent/LicenceDataBag.xsd"/>
                                            <xsd:import
                                                namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
                                                schemaLocation=".../.../Patent/EarliestPriorityApplication.xsd"/>
                                                <xsd:import
                                                    namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
                                                    schemaLocation=".../.../Patent/CompleteSpecificationFilingDate.xsd"/>
                                                    <xsd:import
                                                        namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
                                                        schemaLocation=".../.../Patent/PublicAvailabilityDateBag.xsd"/>
                                                        <xsd:import
                                                            namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
                                                            schemaLocation=".../.../Patent/RightsEffectiveDateBag.xsd"/>
                                                            <xsd:import
                                                                namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
                                                                schemaLocation=".../.../Patent/PatentDocumentRepublication.xsd"/>
                                                                <xsd:import
                                                                    namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
                                                                    schemaLocation=".../.../Patent/ExhibitionFilingDate.xsd"/>
                                                                    <xsd:import
                                                                        namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
                                                                        schemaLocation=".../.../Patent/RightsReestablishedDate.xsd"/>
                                                                        <xsd:import
                                                                            namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
                                                                            schemaLocation=".../.../Patent/ApplicationWithdrawnDate.xsd"/>
                                                                            <xsd:import
```

```
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
schemaLocation="../../../../Patent/ApplicationDeemedWithdrawnDate.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
schemaLocation="../../../../Patent/PatentRevocationDate.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
schemaLocation="../../../../Patent/PCTNationalPhaseEntryDate.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
schemaLocation="../../../../Patent/ApplicationPartiallyWithdrawnDate.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
schemaLocation="../../../../Patent/OppositionData.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../../../../Common/id.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../../../../Common/officeCode.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../../../../Common/st96Version.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../../../../Common/ipoVersion.xsd"/>
```

5. **5.** Declare the new Complex Type **BibliographicDataType** which refers to existing elements and remove the `minOccurs="0"` attribute for the element `ClaimTotalQuantity`.

```

<xsd:complexType name="BibliographicDataType">
  <xsd:element ref="pat:PatentPublicationIdentification"
minOccurs="0"/>
  <xsd:element ref="pat:ApplicationIdentification"/>
  <xsd:element ref="pat:PatentGrantIdentification" minOccurs="0"/>
  <xsd:element ref="pat:PriorityClaimBag" minOccurs="0"/>
  <xsd:element ref="pat:GrantTerm" minOccurs="0"/>
  <xsd:element ref="pat:PreClassificationText" minOccurs="0"/>
  <xsd:element ref="pat:PatentClassificationBag" minOccurs="0"/>
  <xsd:element ref="pat:InventionTitleBag"/>
  <xsd:element ref="pat:PlantName" minOccurs="0"/>
  <xsd:element ref="pat:ReferenceCitationBag" minOccurs="0"/>
  <xsd:element ref="pat:ClaimTotalQuantity"/>
  <xsd:element ref="pat:SearchField" minOccurs="0"/>
  <xsd:element ref="pat:FigureBag" minOccurs="0"/>
  <xsd:element ref="pat:RelatedDocumentBag" minOccurs="0"/>
  <xsd:element ref="pat:ProvisionalGrantPublicationDate"
minOccurs="0"/>
  <xsd:element ref="pat:GrantPublicationDate" minOccurs="0"/>
  <xsd:element ref="pat:ExemplaryClaimBag" minOccurs="0"/>
  <xsd:element ref="com:HagueAgreementData" minOccurs="0"/>
  <xsd:element ref="pat:PartyBag"/>
  <xsd:element ref="pat:InternationalFilingData" minOccurs="0"/>
  <xsd:element ref="pat:RegionalFilingData" minOccurs="0"/>
  <xsd:element ref="pat:InternationalPublishingData" minOccurs="0"/>
  <xsd:element ref="pat:RegionalPublishingData" minOccurs="0"/>
  <xsd:element ref="pat:PatentFamily" minOccurs="0"/>
  <xsd:element ref="com:BioDeposit" minOccurs="0"/>
  <xsd:element ref="pat:PlainLanguageDesignationText" minOccurs="0"/>
  <xsd:element ref="com:FilingLanguageCode" minOccurs="0"/>
  <xsd:element ref="com:PublicationLanguageCode" minOccurs="0"/>
  <xsd:element ref="pat:StateDesignation" minOccurs="0"/>
  <xsd:element ref="pat:LicenceDataBag" minOccurs="0"/>
  <xsd:element ref="pat:EarliestPriorityApplication" minOccurs="0"/>
  <xsd:element ref="pat:CompleteSpecificationFilingDate"
minOccurs="0"/>
  <xsd:element ref="pat:PublicAvailabilityDateBag" minOccurs="0"/>
  <xsd:element ref="pat:RightsEffectiveDateBag" minOccurs="0"/>
  <xsd:element ref="pat:PatentDocumentRepublication" minOccurs="0"/>
  <xsd:element ref="pat:ExhibitionFilingDate" minOccurs="0"/>
  <xsd:element ref="pat:RightsReestablishedDate" minOccurs="0"/>
  <xsd:element ref="pat:ApplicationWithdrawnDate" minOccurs="0"/>
  <xsd:element ref="pat:ApplicationDeemedWithdrawnDate"
minOccurs="0"/>
  <xsd:element ref="pat:PatentRevocationDate" minOccurs="0"/>
  <xsd:element ref="pat:PCTNationalPhaseEntryDate" minOccurs="0"/>
  <xsd:element ref="pat:ApplicationPartiallyWithdrawnDate"
minOccurs="0"/>
  <xsd:element ref="pat:OppositionData" minOccurs="0"/>
<xsd:attribute ref="com:officeCode"/>
<xsd:attribute ref="com:st96Version" use="required"/>
<xsd:attribute ref="com:ipoVersion"/>
</xsd:schema>

```

```
<xsd:complexType name="BibliographicDataType">
    <xsd:sequence>
        <xsd:element ref="pat:PatentPublicationIdentification" minOccurs="0"/>
            <xsd:element ref="pat:ApplicationIdentification"/>
        <xsd:element ref="pat:PatentGrantIdentification"
minOccurs="0"/>
            <xsd:element ref="pat:PriorityClaimBag" minOccurs="0"/>
            <xsd:element ref="pat:GrantTerm" minOccurs="0"/>
            <xsd:element ref="pat:PreClassificationText" minOccurs="0"/>
                <xsd:element ref="pat:PatentClassificationBag"
minOccurs="0"/>
                    <xsd:element ref="pat:InventionTitleBag"/>
                    <xsd:element ref="pat:PlantName" minOccurs="0"/>
                    <xsd:element ref="pat:ReferenceCitationBag" minOccurs="0"/>
                    <xsd:element ref="pat:ClaimTotalQuantity"/>
                    <xsd:element ref="pat:SearchField" minOccurs="0"/>
                    <xsd:element ref="pat:FigureBag" minOccurs="0"/>
                <xsd:element ref="pat:RelatedDocumentBag" minOccurs="0"/>
<xsd:element ref="pat:ProvisionalGrantPublicationDate" minOccurs="0"/>
                <xsd:element ref="pat:GrantPublicationDate" minOccurs="0"/>
                <xsd:element ref="pat:ExemplaryClaimBag" minOccurs="0"/>
                <xsd:element ref="com:HagueAgreementData" minOccurs="0"/>
            <xsd:element ref="pat:PartyBag"/>
```

```

<xsd:element ref="pat:InternationalFilingData"
minOccurs="0"/>
    <xsd:element ref="pat:RegionalFilingData" minOccurs="0"/>
<xsd:element ref="pat:InternationalPublishingData" minOccurs="0"/>
    <xsd:element ref="pat:RegionalPublishingData" minOccurs="0"/>
        <xsd:element ref="pat:PatentFamily" minOccurs="0"/>
            <xsd:element ref="com:BioDeposit" minOccurs="0"/>
        <xsd:element ref="pat:PlainLanguageDesignationText" minOccurs="0"/>
            <xsd:element ref="com:FilingLanguageCode" minOccurs="0"/>
                <xsd:element ref="com:PublicationLanguageCode"
minOccurs="0"/>
                    <xsd:element ref="pat:StateDesignation" minOccurs="0"/>
                        <xsd:element ref="pat:LicenceDataBag" minOccurs="0"/>
                    <xsd:element ref="pat:EarliestPriorityApplication"
minOccurs="0"/>
                <xsd:element ref="pat:CompleteSpecificationFilingDate" minOccurs="0"/>
                    <xsd:element ref="pat:PublicAvailabilityDateBag"
minOccurs="0"/>
                        <xsd:element ref="pat:RightsEffectiveDateBag" minOccurs="0"/>
                    <xsd:element ref="pat:PatentDocumentRepublication" minOccurs="0"/>
                        <xsd:element ref="pat:ExhibitionFilingDate" minOccurs="0"/>
                            <xsd:element ref="pat:RightsReestablishedDate"
minOccurs="0"/>
                                <xsd:element ref="pat:ApplicationWithdrawnDate"
minOccurs="0"/>
                                    <xsd:element ref="pat:ApplicationDeemedWithdrawnDate" minOccurs="0"/>
                                        <xsd:element ref="pat:PatentRevocationDate" minOccurs="0"/>
                                            <xsd:element ref="pat:PCTNationalPhaseEntryDate"
minOccurs="0"/>
                                                <xsd:element ref="pat:ApplicationPartiallyWithdrawnDate" minOccurs="0"/>
                                                    <xsd:element ref="pat:OppositionData" minOccurs="0"/>
                                                </xsd:sequence>
                                                <xsd:attribute ref="com:id"/>
                                                <xsd:attribute ref="com:officeCode"/>
                                                <xsd:attribute ref="com:st96Version" use="required"/>
                                                <xsd:attribute ref="com:ipoVersion"/>
                                            </xsd:complexType>
</xsd:schema>

```

6. Update ST.96 schema file, BibliographicData.xsd, in the **Patent->Document** folder.

7. **7.** Declare new IPO namespace.

```

<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:uspat="urn:us:gov:doc:uspto:patent" <xsd:schema
xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:uspat="urn:us:gov:doc:uspto:patent"
targetNamespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
elementFormDefault="qualified" attributeFormDefault="qualified"
version="V3_0">V4_01</xsd:schema>

```

8.

8. Update existing ST.96 BibliographicDataType.xsd include statement to import statement with the new IPO declared Type, BibliographicDataType.xsd.

```
<xsd:import namespace="urn:us:gov:doc:uspto:patent"  
schemaLocation=".../.../USPatent/Document/BibliographicDataType.xsd"/>
```

9. b. Update BibliographicDataType namespace reference with new IPO namespace.

```
<xsd:element name="BibliographicData" type="uspat:BibliographicDataType">  
    <xsd:annotation>  
        <xsd:documentation>Bibliographic information included on the first page of  
        a patent  
            document. Contains document identification, domestic  
            filing data, foreign priority  
            data, public availability dates or term of protection, technical  
            information,  
            related patent or application  
            information</xsd:documentation>  
    </xsd:annotation>  
    <xsd:unique name="BibComponentKey">  
        <xsd:selector xpath=".///*"/>  
        <xsd:field xpath="@com:id"/>  
    </xsd:unique>  
</xsd:element>
```

10. The final content model design is shown below:

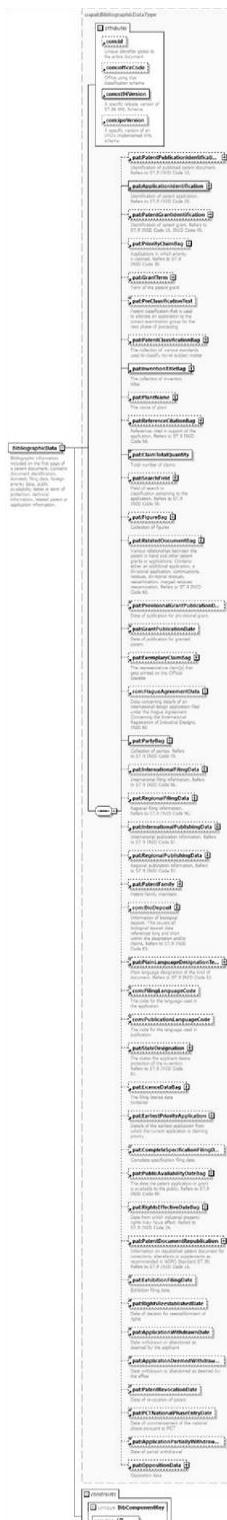


Figure 16: uspat: BibliographicData

1.6. Add new aggregate component

Same as Appendix A section 1.**3—6**

1.7. Add new document components

Not Allowed

1.8. Remove an existing element and add a new element

Not Allowed

2. Design-Stage Schemas - Flattened Schemas: Remove

2.1. Add an optional element

Same as Appendix A section 2.1

2.2. Add an optional attribute

Same as Appendix A section 2.2

2.3. Remove an optional element

Patent Sample Business Case: Remove optional element UPOVCode from the PlantName Structure.

1. **1.** Create a new W3C schema file, USBibliographicData_V1_0.xsd in the same folder as BibliographicData_V3_0V4_01.xsd.
2. **2.** Set the target Namespace to the IPO's namespace and add new namespace entries `xmlns:xxpat`, where xx is the lower-case ST.3 Code. Each IPO is expected to version the modified components separate from WIPO because this is the `officeIPO` specific implementation. "V1_0" is shown in the following example because this is the first Office modified component.

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:uspat="urn:us:gov:doc:uspto:patent"
  targetNamespace="urn:us:gov:doc:uspto:patent" elementFormDefault="qualified"
  attributeFormDefault="qualified" version="V1_0">
```

3.

3. Import ST.96 Components which are needed to define a new Type `PlantNameType`.

```
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  schemaLocation="Common_V3_0V4_01.xsd"/>
<xsd:import
  namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  schemaLocation="BibliographicData_V3_0V4_01.xsd"/>
```

4.

4. Create the new Complex Type `PlantNameType` as shown below, which refers to existing elements with the exception of `UPOVCode`.

```
<xsd:complexType name="PlantNameType">
  <xsd:choice maxOccurs="unbounded">
    <xsd:element ref="pat:BotanicalName"/>
    <xsd:element ref="pat:PlantCommonName"/>
  </xsd:choice>
  <xsd:attribute ref="com:id"/>
```

```
</xsd:complexType> </xsd:schema>
```

2.4. 5. *In the Add new aggregate component*

Same as Appendix A section 1.6

2.5. *Add new document components*

Not Allowed

2.6. *Remove an existing element and add a new element*

Not Allowed

3. Design-Stage Schemas - Flattened Schemas *BibliographicData_V3_0.xsd file, declare the new*

3.1. *Add an optional element*

Same as Appendix A section 2.1

3.2. *Add an optional attribute*

Same as Appendix A section 2.2

3.3. *Remove an optional element*

Patent Sample Business Case: Remove optional element UPOVCode from the PlantName Structure.

5. Create a new W3C schema file *created above*, USBibliographicData_V1_0.xsd *in the same folder as BibliographicData_V4_01.xsd*.

6. Set the target Namespace to the IPO's namespace *xx* and add new namespace entries *xmlns:xxpat*, where *xx* is the lower-case ST.3 Code. Each IPO is expected to version the modified components separate from WIPO because this is the *officeIPO* specific implementation. "V1_0" is shown in the following example because this is the first Office modified component. "V1_0" is shown in the below example because this is the first Office modified component.

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema
  xmlns:xsdcom="http://www.w3.org/2001/wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  xmlns:comxsd="http://www.wipo.int/standards/w3.org/2001/XMLSchema/ST96/Common"
  xmlns:uspat="urn:us:gov:doc:uspto:patent"
  targetNamespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  urn:us:gov:doc:uspto:patent" elementFormDefault="qualified"
  attributeFormDefault="qualified" version="V1_0">
```

7. Import ST.96 Components which are needed to define a new Type PlantNameType.

```
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  schemaLocation="Common_V4_01.xsd"/>
<xsd:import
  namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  schemaLocation="BibliographicData_V4_01.xsd"/>
```

8. Create the new Complex Type PlantNameType as shown below, which refers to existing elements with the exception of UPOVCode.

```
<xsd:complexType name="PlantNameType">
  <xsd:choice maxOccurs="unbounded">
    <xsd:element ref="pat:BotanicalName"/>
```

```

        <xsd:element ref="pat:PlantCommonName"/>
    </xsd:choice>
    <xsd:attribute ref="com:id"/>
</xsd:complexType> </xsd:schema>

```

9. In the existing BibliographicData_V4_0.xsd file, declare the new schema file created above USBibliographicData_V1_0.xsd namespace. Each IPO is expected to version the modified components separate from WIPO because this is the IPO specific implementation. "V1_0" is shown in the below example because this is the first Office modified component.

```

<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:uspat="urn:us:gov:doc:uspto:patent"
  targetNamespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V1_0">

```

10. Import the new schema file USBibliographicData_V1_0.xsd in which the new IPO Type was defined, USBibliographicData_V1_0.xsd.

```

<xsd:import namespace="urn:us:gov:doc:uspto:patent"
  schemaLocation="USBibliographicData_V1_0.xsd"/>

```

7. 11. Update the element `PlantName` based on the corresponding new Type above with new namespace reference.

```

<xsd:element name="PlantName" type="uspat:PlantNameType">
    <xsd:annotation>
        <xsd:documentation>The name of plant</xsd:documentation>
    </xsd:annotation>
</xsd:element>

```

8. 12. The final content model design for `PlantName` is shown below:

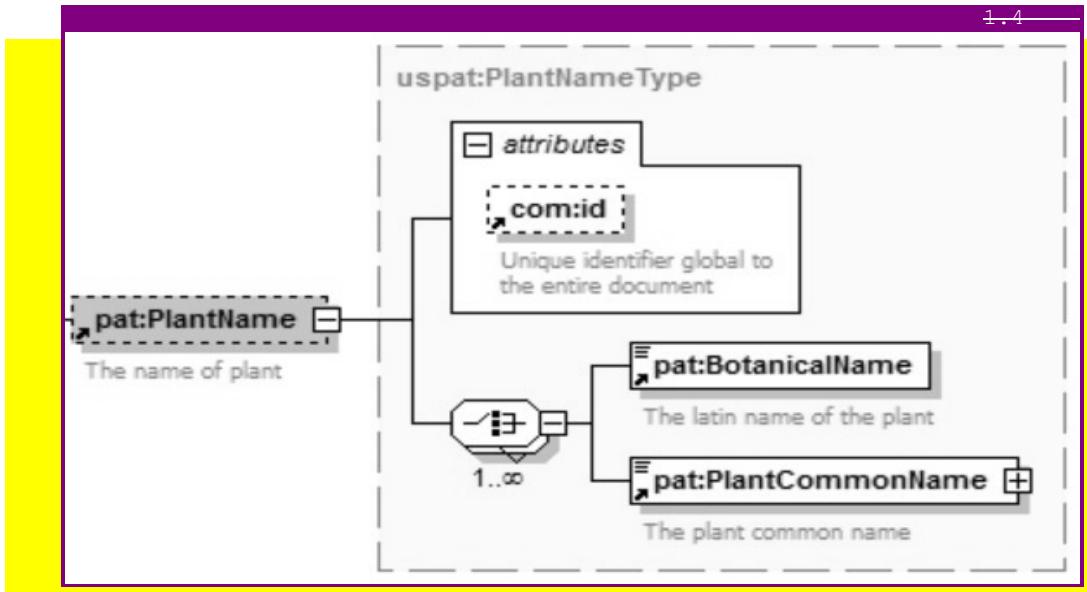


Figure 17: `uspat: PlantName`

3.4. Modify constraints

Patent Sample Business Case: Alter (Restrict to IPO specific values) `com:CrossReferenceCategory` enumeration entries to meet IPO's business need.

1. Create a new W3C schema file, `USCommon_V1_0.xsd` at the same level as `ST96_V4_0_Common.xsd`.
2. Set the target Namespace to the IPO's namespace and add new namespace entries `xmlns:xxcom`, where `xx` is the lower-case ST.3 Code. Each IPO is expected to version the modified components separate from WIPO because this is the IPO specific implementation. "V1_0" is shown in the following example because this is the first Office modified component.

Please note that the example uses URN for IPO namespace as approved at USPTO.
Other IPO's can use either URN or URL namespace based on their internal practice.

```

<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:uscom="urn:us:gov:doc:uspto:common"
  targetNamespace="urn:us:gov:doc:uspto:common" elementFormDefault="qualified"
  attributeFormDefault="qualified" version="V1_0">

</xsd:schema>
  
```

3. Define `CrossReferenceCategoryType` definition in `USCommon_V1_0.xsd`.

```

<xsd:simpleType name="CrossReferenceCategoryType">
  <xsd:annotation>
    <xsd:documentation>Category of Cross reference</xsd:documentation>
  </xsd:annotation>
  <xsd:restriction base="xsd:token">
    <xsd:enumeration value="USC">
      <xsd:annotation>
        <xsd:documentation>United State
        Code</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
  </xsd:restriction>
</xsd:simpleType>
  
```

```

        </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="CFR">
        <xsd:annotation>
            <xsd:documentation>Code of Federal
Regulation</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="Form paragraph">
        <xsd:annotation>
            <xsd:documentation>Form paragraph</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="Chapter">
        <xsd:annotation>
            <xsd:documentation>Chapter</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="Section">
        <xsd:annotation>
            <xsd:documentation>Section with Chapters or section
within a publication</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="Administrative instruction">
        <xsd:annotation>
            <xsd:documentation>Administrative
instruction</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="PCT">
        <xsd:annotation>
            <xsd:documentation>Patent Cooperation
Treaty</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="Reference link">
        <xsd:annotation>
            <xsd:documentation>Reference link, used for external
reference populated with URL</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="Examiner note">
        <xsd:annotation>
            <xsd:documentation>Examiner note, used for external
reference located in another document</xsd:documentation>
        </xsd:annotation>
    </xsd:enumeration>
</xsd:restriction>
</xsd:simpleType>

```

4. Update ST.96 `crossReferenceCategory` definition to refer to the IPO's customized `CrossReferenceCategoryType` definition in `USCommon_V1_0.xsd` with an appropriate import statement.

```

:--<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:mathml="http://www.w3.org/1998/Math/MathML" xmlns:tbl="http://www.oasis-
  open.org/tables/exchange/1.0" xmlns:uscom="urn:us:gov:doc:uspto:common"
  targetNamespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V4_0">

```

```
<xsd:import namespace="urn:us:gov:doc:uspto:common"
schemaLocation="USCommon V1.0.xsd"/> (← Towards the top of the file)

<xsd:attribute name="crossReferenceCategory"
type="uscom:CrossReferenceCategoryType">
    <xsd:annotation>
        <xsd:documentation>Category of cross reference, e.g.
table</xsd:documentation>
    </xsd:annotation>
```

Pre and Post-Update XSD differences:

Customized IPO Type Reference

Original XML Type Reference

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- $Id: v3.xsd,v 1.1 2009/07/23 14:41:00 alvarez Exp $ -->
<!-- $Revision: 1.1 $ -->
<!-- $Date: 2009-07-23 14:41:00 +0200 (Tue, 23 Jul 2009) $ -->
<!-- $Name: v3.xsd $ -->
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns="http://www.w3.org/2001/XMLSchema-Instance" xmlns:com="http://www.w3.org/1998/Math/MathML" xmlns:common="http://www.oasis-open.org/ctags/exchange/1.0" xmlns:mathml="http://www.w3.org/1998/Math/MathML" elementFormDefault="qualified" attributeFormDefault="qualified" version="V3">
```

Customized XML Type Reference

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- $Id: v3.xsd,v 1.1 2009/07/23 14:41:00 alvarez Exp $ -->
<!-- $Revision: 1.1 $ -->
<!-- $Date: 2009-07-23 14:41:00 +0200 (Tue, 23 Jul 2009) $ -->
<!-- $Name: v3.xsd $ -->
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns="http://www.w3.org/2001/XMLSchema-Instance" xmlns:com="http://www.w3.org/1998/Math/MathML" xmlns:common="http://www.oasis-open.org/ctags/exchange/1.0" xmlns:mathml="http://www.w3.org/1998/Math/MathML" elementFormDefault="qualified" attributeFormDefault="qualified" version="V3" />
```

The screenshot shows two side-by-side XML schema definitions. The left one is the original 'Original XML Type Reference' and the right one is the 'Customized XML Type Reference'. Both schemas define the same structure for the 'v3.xsd' file, including the root element 'xsd:schema', various namespaces, and specific elements like 'com:CrossReferenceCategory' and 'com:ContactType'. The customized version on the right has several annotations added, particularly around the 'com:CrossReferenceCategory' and 'com:ContactType' elements, which are highlighted with red boxes. These annotations provide additional context or processing instructions for these specific elements.

Figure 18: Comparison after applying design rules

3.5. Make an element required

Patent Sample Business Case: Make ClaimTotalQuantity required in the BibliographicData Structure.

1. Create a new W3C schema file, USBibliographicData_V1_0.xsd in the same folder as BibliographicData_v3V4.xsd.
 2. Set the target Namespace to the IPO's namespace and add new namespace entries xmlns:xxpat, where xx is the lower-case ST.3 Code. Each IPO is expected to version the modified components separate from WIPO because this is the office IPO specific implementation. "V1_0" is shown in the following example because this is the first Office modified component.

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:uspat="urn:us:gov:doc:uspto:patent"
  targetNamespace="urn:us:gov:doc:uspto:patent" elementFormDefault="qualified"
  attributeFormDefault="qualified" version="V1_0">
```

3. _____

3. Import ST.96 Components which are needed to define a new Type BibliographicDataType

```
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="Common_v3V4_0.xsd"/>
<xsd:import
```

```
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
schemaLocation="BibliographicData_v3V4_0.xsd"/>
```

4.

4. Create the new Complex Type `BibliographicDataType` which refers to existing elements and remove the `minOccurs="0"` attribute for the element `ClaimTotalQuantity`.

```

<xsd:complexType name="BibliographicDataType">
  <xsd:element ref="pat:PatentPublicationIdentification" minOccurs="0"/>
  <xsd:element ref="pat:ApplicationIdentification"/>
  <xsd:element ref="pat:PatentGrantIdentification" minOccurs="0"/>
  <xsd:element ref="pat:PriorityClaimBag" minOccurs="0"/>
  <xsd:element ref="pat:GrantTerm" minOccurs="0"/>
  <xsd:element ref="pat:PreClassificationText" minOccurs="0"/>
  <xsd:element ref="pat:PatentClassificationBag" minOccurs="0"/>
  <xsd:element ref="pat:InventionTitleBag"/>
  <xsd:element ref="pat:PlantName" minOccurs="0"/>
  <xsd:element ref="pat:ReferenceCitationBag" minOccurs="0"/>
  <xsd:element ref="pat:ClaimTotalQuantity"/>
  <xsd:element ref="pat:SearchField" minOccurs="0"/>
  <xsd:element ref="pat:FigureBag" minOccurs="0"/>
  <xsd:element ref="pat:RelatedDocumentBag" minOccurs="0"/>
  <xsd:element ref="pat:ProvisionalGrantPublicationDate" minOccurs="0"/>
  <xsd:element ref="pat:GrantPublicationDate" minOccurs="0"/>
  <xsd:element ref="pat:ExemplaryClaimBag" minOccurs="0"/>
  <xsd:element ref="com:HagueAgreementData" minOccurs="0"/>
  <xsd:element ref="pat:PartyBag"/>
  <xsd:element ref="pat:InternationalFilingData" minOccurs="0"/>
  <xsd:element ref="pat:RegionalFilingData" minOccurs="0"/>
  <xsd:element ref="pat:InternationalPublishingData" minOccurs="0"/>
  <xsd:element ref="pat:RegionalPublishingData" minOccurs="0"/>
  <xsd:element ref="pat:PatentFamily" minOccurs="0"/>
  <xsd:element ref="com:BioDeposit" minOccurs="0"/>
  <xsd:element ref="pat:PlainLanguageDesignationText" minOccurs="0"/>
  <xsd:element ref="com:FilingLanguageCode" minOccurs="0"/>
  <xsd:element ref="com:PublicationLanguageCode" minOccurs="0"/>
  <xsd:element ref="pat:StateDesignation" minOccurs="0"/>
  <xsd:element ref="pat:LicenceDataBag" minOccurs="0"/>
  <xsd:element ref="pat:EarliestPriorityApplication" minOccurs="0"/>
  <xsd:element ref="pat:CompleteSpecificationFilingDate" minOccurs="0"/>
  <xsd:element ref="pat:PublicAvailabilityDateBag" minOccurs="0"/>
  <xsd:element ref="pat:RightsEffectiveDateBag" minOccurs="0"/>
  <xsd:element ref="pat:PatentDocumentRepublication" minOccurs="0"/>
  <xsd:element ref="pat:ExhibitionFilingDate" minOccurs="0"/>
  <xsd:element ref="pat:RightsReestablishedDate" minOccurs="0"/>
  <xsd:element ref="pat:ApplicationWithdrawnDate" minOccurs="0"/>
  <xsd:element ref="pat:ApplicationDeemedWithdrawnDate" minOccurs="0"/>
  <xsd:element ref="pat:PatentRevocationDate" minOccurs="0"/>
  <xsd:element ref="pat:PCTNationalPhaseEntryDate" minOccurs="0"/>
  <xsd:element ref="pat:ApplicationPartiallyWithdrawnDate" minOccurs="0"/>
  <xsd:element ref="pat:OppositionData" minOccurs="0"/>

```

```

<xsd:complexType name="BibliographicDataType">
  <xsd:sequence>
    <xsd:element ref="pat:PatentPublicationIdentification" minOccurs="0"/>
      <xsd:element ref="pat:ApplicationIdentification"/>
    <xsd:element ref="pat:PatentGrantIdentification" minOccurs="0"/>
      <xsd:element ref="pat:PriorityClaimBag" minOccurs="0"/>
      <xsd:element ref="pat:GrantTerm" minOccurs="0"/>
      <xsd:element ref="pat:PreClassificationText" minOccurs="0"/>
        <xsd:element ref="pat:PatentClassificationBag"
minOccurs="0"/>
          <xsd:element ref="pat:InventionTitleBag"/>
          <xsd:element ref="pat:PlantName" minOccurs="0"/>
          <xsd:element ref="pat:ReferenceCitationBag" minOccurs="0"/>
          <xsd:element ref="pat:ClaimTotalQuantity"/>
          <xsd:element ref="pat:SearchField" minOccurs="0"/>
          <xsd:element ref="pat:FigureBag" minOccurs="0"/>
        <xsd:element ref="pat:RelatedDocumentBag" minOccurs="0"/>
    <xsd:element ref="pat:ProvisionalGrantPublicationDate" minOccurs="0"/>
      <xsd:element ref="pat:GrantPublicationDate" minOccurs="0"/>
      <xsd:element ref="pat:ExemplaryClaimBag" minOccurs="0"/>
      <xsd:element ref="com:HagueAgreementData" minOccurs="0"/>
      <xsd:element ref="pat:PartyBag"/>
        <xsd:element ref="pat:InternationalFilingData"
minOccurs="0"/>
          <xsd:element ref="pat:RegionalFilingData" minOccurs="0"/>
    <xsd:element ref="pat:InternationalPublishingData" minOccurs="0"/>
      <xsd:element ref="pat:RegionalPublishingData" minOccurs="0"/>
        <xsd:element ref="pat:PatentFamily" minOccurs="0"/>
      <xsd:element ref="com:BioDeposit" minOccurs="0"/>
      <xsd:element ref="pat:PlainLanguageDesignationText" minOccurs="0"/>
        <xsd:element ref="com:FilingLanguageCode" minOccurs="0"/>
        <xsd:element ref="com:PublicationLanguageCode"
minOccurs="0"/>
          <xsd:element ref="pat:StateDesignation" minOccurs="0"/>
            <xsd:element ref="pat:LicenceDataBag" minOccurs="0"/>
          <xsd:element ref="pat:EarliestPriorityApplication"
minOccurs="0"/>
            <xsd:element ref="pat:CompleteSpecificationFilingDate" minOccurs="0"/>
              <xsd:element ref="pat:PublicAvailabilityDateBag"
minOccurs="0"/>
                <xsd:element ref="pat:RightsEffectiveDateBag" minOccurs="0"/>
              <xsd:element ref="pat:PatentDocumentRepublication" minOccurs="0"/>
                <xsd:element ref="pat:ExhibitionFilingDate" minOccurs="0"/>
                  <xsd:element ref="pat:RightsReestablishedDate"
minOccurs="0"/>
                    <xsd:element ref="pat:ApplicationWithdrawnDate"
minOccurs="0"/>
                    <xsd:element ref="pat:ApplicationDeemedWithdrawnDate" minOccurs="0"/>
                      <xsd:element ref="pat:PatentRevocationDate" minOccurs="0"/>
                      <xsd:element ref="pat:PCTNationalPhaseEntryDate"
minOccurs="0"/>
                    <xsd:element ref="pat:ApplicationPartiallyWithdrawnDate" minOccurs="0"/>
                      <xsd:element ref="pat:OppositionData" minOccurs="0"/>

```

</xsd:sequence>

```

<xsd:attribute ref="com:id"/>
<xsd:attribute ref="com:officeCode"/>
<xsd:attribute ref="com:st96Version" use="required"/>
<xsd:attribute ref="com:ipoVersion"/>
5. _____ </xsd:complexType>
</xsd:schema>

```

5. In the existing **BibliographicData_V3_0V4_01.xsd** file, declare new IPO namespace and import the new schema file created above **USBibliographicData_V1_0.xsd**. Each IPO is expected to version the modified components separate from WIPO because this is the **Office IPO** specific implementation. "V1_0" is shown in the following example because this is the first Office modified component.

```

<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:uspat="urn:us:gov:doc:uspto:patent"
  targetNamespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V1_0">
  <xsd:import namespace="urn:us:gov:doc:uspto:patent"
    schemaLocation="USBibliographicData_V1_0.xsd"/>

```

6. _____

6. Update the existing element **BibliographicData** type namespace reference based on the corresponding Type above.

```

<xsd:element name="BibliographicData" type="uspat:BibliographicDataType">
  <xsd:annotation>
    <xsd:documentation>Bibliographic information included on the first page of
    a patent
      document. Contains document identification, domestic
      filing data, foreign priority
      data, public availability dates or term of protection, technical
      information,
      related patent or application
    informa</xsd:documentation>
  </xsd:annotation>
  <xsd:unique name="BibComponentKey">
    <xsd:selector xpath=".///*"/>
    <xsd:field xpath="@com:id"/>
  </xsd:unique>
</xsd:element>

```

7. The final content model design is shown below:

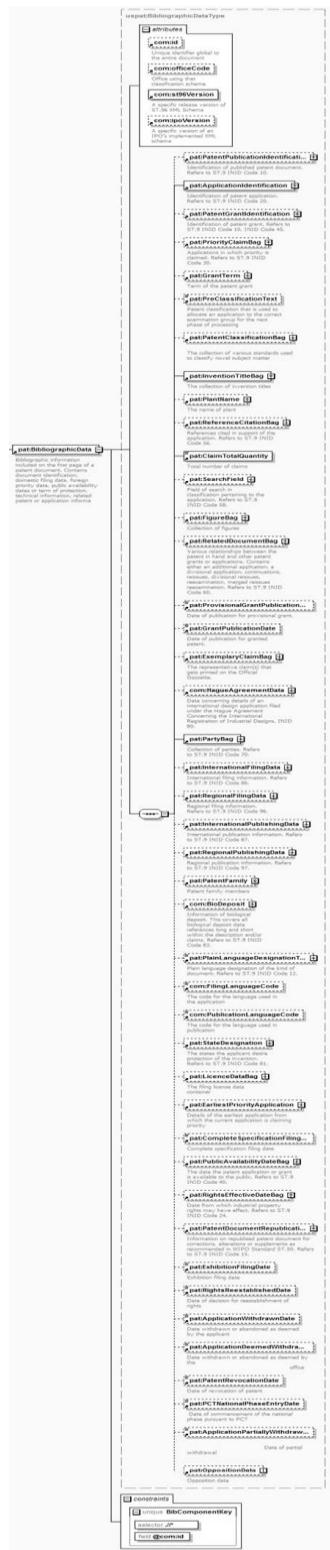


Figure 19: uspat: BibliographicData

3.6. Add new aggregate component

Same as Appendix A section 2.6

3.7. Add new document components

Not Allowed

3.8. Remove an existing element and add a new element

Not Allowed

APPENDIX B—Examples of C - EXAMPLES OF ST.96 compatible schemas COMPATIBLE SCHEMAS

The following examples are listed to show how developers can reuse ST.96 Components in their implementation schemas to make them compatible with ST.96 Schemas. Note that the target Namespace for compatible schemas MUST be the IPO namespace.

1. COMPLEX TYPES SCHEMAS

1. 1 Design-Stage Schemas - Modular Schemas:

1.1. Add a new an optional element

Trademark Same as Appendix A section 1.1

1.2. Add an optional attribute

Same as Appendix A section 1.2

1.3. Remove an optional element

Same as Appendix B section 1.3

1.4. Modify constraints

Same as Appendix B section 1.4

1.5. Make an element required

Same as Appendix B section 1.5

1.6. Add new aggregate component

Same as Appendix A, B section 1.6

1.7. Add new document components

Patent Sample Business Case: ~~Add new InternationalRegistrationExpirationDate date element Create new Patent BibliographicData document level model with additional IPO needed components on top of ST.96 structure.~~

1. Create a folder called “USCommon” at the same level as “Common”, “Patent”, “Trademark” etc.
2. Set the target Namespace to ~~TrademarkApplication Structure~~ the IPO’s namespace and add new namespace entries `xmlns:xxcom`, where `xx` is the lower-case ST.3 Code. Each IPO is expected to version the modified components separate from WIPO because this is the IPO specific implementation. “V1_0” is shown in the following example because this is the first Office modified component.

Please note that the example uses URN for IPO namespace as approved at USPTO.
Other IPO’s can use either URN or URL namespace based on their internal practice.

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:uscom="urn:us:gov:doc:uspto:common"
  targetNamespace="urn:us:gov:doc:uspto:common" elementFormDefault="qualified"
  attributeFormDefault="qualified" version="V1_0">
```

3. Define new W3C schema file CustomerNumberType.xsd

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:uscom="urn:us:gov:doc:uspto:common"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
```

```

targetNamespace="urn:us:gov:doc:uspto:common" elementFormDefault="qualified"
attributeFormDefault="qualified" version="V1_0">
<xsd:element name="CustomerNumber" type="xsd:string">
  <xsd:annotation>
    <xsd:documentation>Customer number for
correspondence.</xsd:documentation>
  </xsd:annotation>
</xsd:element>
</xsd:schema>

```

4. Define new W3C schema file BusinessEntityStatusCategory.xsd

```

<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:uscom="urn:us:gov:doc:uspto:common"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
targetNamespace="urn:us:gov:doc:uspto:common" elementFormDefault="qualified"
attributeFormDefault="qualified" version="V1_0">
<xsd:element name="BusinessEntityStatusCategory" type="xsd:token">
  <xsd:annotation>
    <xsd:documentation>Business entity status type.</xsd:documentation>
  </xsd:annotation>
</xsd:element>
</xsd:schema>

```

5. Create a folder called "USPatent" at the same level as "Common", "Patent", "Trademark" etc.
6. Set the target Namespace to the IPO's namespace and add new namespace entries xmlns:xxpat, where xx is the lower-case ST.3 Code. Each IPO is expected to version the modified components separate from WIPO because this is the IPO specific implementation. "V1_0" is shown in the following example because this is the first Office modified component.

Please note that the example uses URN for IPO namespace as approved at USPTO.
 Other IPO's can use either URN or URL namespace based on their internal practice.

```

<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:uspat="urn:us:gov:doc:uspto:patent"
targetNamespace="urn:us:gov:doc:uspto:patent" elementFormDefault="qualified"
attributeFormDefault="qualified" version="V1_0">

```

7. Define new W3C schema file MicroformQuantity.xsd

```

<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:uspat="urn:us:gov:doc:uspto:patent"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
targetNamespace="urn:us:gov:doc:uspto:patent" elementFormDefault="qualified"
attributeFormDefault="qualified" version="V8_0">
<xsd:element name="MicroformQuantity" type="xsd:positiveInteger">
  <xsd:annotation>
    <xsd:documentation>Microform quantity number</xsd:documentation>
  </xsd:annotation>
</xsd:element>
</xsd:schema>

```

8. Create a folder Document in USPatent folder
9. Define new W3C schema file BibliographicDataType_V1_0.xsd in Document folder

```

<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"

```

```

xmlns:uspat="urn:us:gov:doc:uspto:patent"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:uscom="urn:us:gov:doc:uspto:common"
targetNamespace="urn:us:gov:doc:uspto:patent" elementFormDefault="qualified"
attributeFormDefault="qualified" version="V1_0">
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
schemaLocation="../../Patent/Document/BibliographicDataType_V4_0.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
schemaLocation="../../../Patent/FigureNumber.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
schemaLocation="../../../Patent/RepublicationCategory.xsd"/>
<xsd:import namespace="urn:us:gov:doc:uspto:common"
schemaLocation="../../../USCommon/CustomerNumber.xsd"/>
<xsd:import namespace="urn:us:gov:doc:uspto:common"
schemaLocation="../../../USCommon/BusinessEntityStatusCategory.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation="../../../Common/ApplicantFileReference.xsd"/>
<xsd:include schemaLocation="../MicroformQuantity.xsd"/>
<xsd:complexType name="BibliographicDataType">
  <xsd:complexContent>
    <xsd:extension base="pat:BibliographicDataType">
      <xsd:sequence>
        <xsd:element ref="pat:FigureNumber" minOccurs="0"/>
        <xsd:element ref="com:ApplicantFileReference"
minOccurs="0"/>
        <xsd:element ref="uscom:CustomerNumber" minOccurs="0"/>
        <xsd:element ref="uscom:BusinessEntityStatusCategory"
minOccurs="0" maxOccurs="unbounded"/>
        <xsd:element ref="uspat:MicroformQuantity"
minOccurs="0"/>
        <xsd:element ref="pat:RepublicationCategory"
minOccurs="0"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
</xsd:schema>

```

10. Define new W3C schema file **BibliographicData_V1_0.xsd** in Document folder with appropriate import to type created above.

```

<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
xmlns:uspat="urn:us:gov:doc:uspto:patent"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
targetNamespace="urn:us:gov:doc:uspto:patent" elementFormDefault="qualified"
attributeFormDefault="qualified" version="V1_0">
<xsd:include schemaLocation="BibliographicDataType_V1_0.xsd"/>
<xsd:annotation>
  <xsd:appinfo>
    <com:SchemaCreatedDate>2015/02/20</com:SchemaCreatedDate>
    <com:SchemaLastModifiedDate>2015/02/26</com:SchemaLastModifiedDate>
    <com:SchemaContactPoint> USPTO, Enterprise Data Architecture Division
(EDAD) </com:SchemaContactPoint>
    <com:SchemaReleaseNoteURL>ReleaseNotes.txt</com:SchemaReleaseNoteURL>
  </xsd:appinfo>
</xsd:annotation>
<xsd:element name="BibliographicData" type="uspat:BibliographicDataType">
  <xsd:annotation>
    <xsd:documentation>Bibliographic information included on the first
page of a patent document. Contains document identification, domestic filing

```

```
data, foreign priority data, public availability dates or term of protection,  
technical information, related patent or application  
information</xsd:documentation>  
</xsd:annotation>  
<xsd:unique name="BibComponentKey">  
<xsd:selector xpath=".//*"/>  
<xsd:field xpath="@com:id"/>  
</xsd:unique>  
</xsd:element>  
</xsd:schema>
```

11. The final content model design compared to ST.96 copy is shown below:

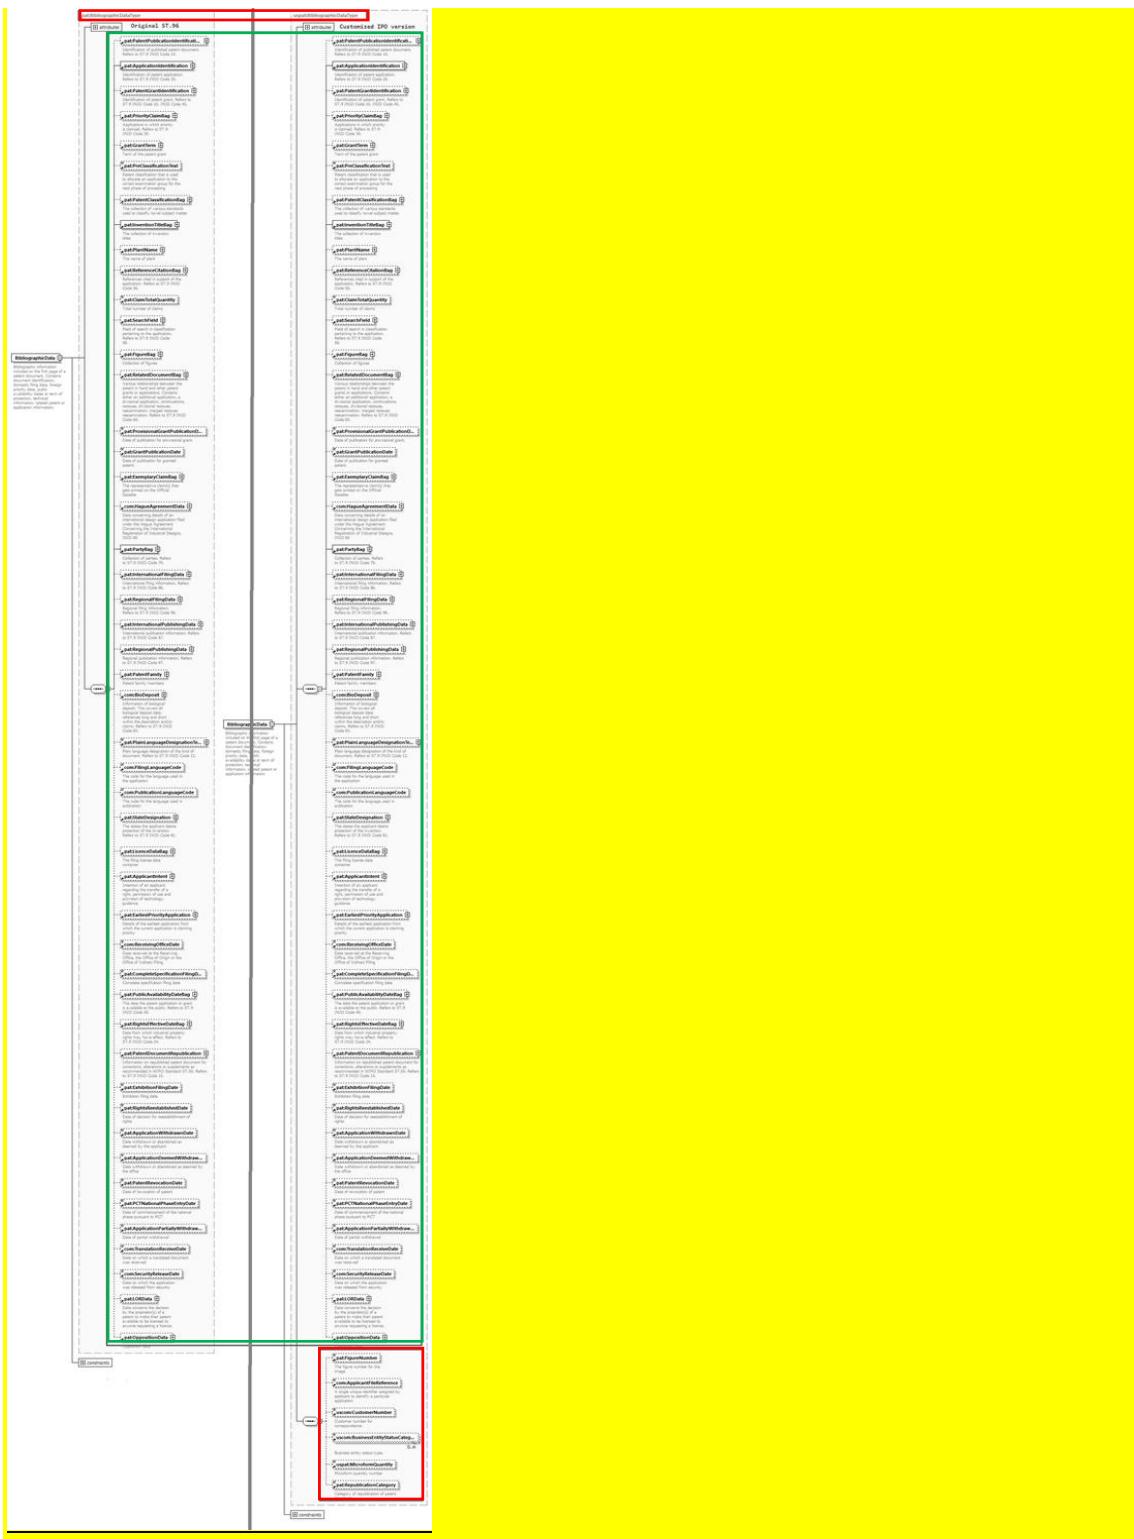


Figure 20: uspat: BibliographicData – customized versus official

1.8. Remove an existing element and add a new element

In order to add a new element and remove an existing one, developers SHOULD follow the following steps:

Trademark Sample Business Case: Remove the RequestSoftware element and add the ApplicationCategory element to the TrademarkApplication Structure:^{1.}

1. Create a folder called “USTrademark” at the same level as “Patent”, “Trademark”, “Common”.
2. Under USTrademark create new subfolder called “Document”.
3. Create a new W3C schema file called `InternationalRegistrationExpirationDateApplicationCategoryType.xsd` in the folder “USTrademark”.
4. Set the target Namespace to the IPO’s namespace and add the new namespace `xmlns:xxtmk`, where xx is an ST.3 Code. Define new element `InternationalRegistrationExpirationDateApplicationCategoryType` as indicated below.

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:tmk="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:ustmk="urn:us:gov:doc:uspto:trademark"
  targetNamespace="urn:us:gov:doc:uspto:trademark"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V1_0">
  Common/DateType.elementFormDefault="qualified"
  attributeFormDefault="qualified" version="V1_0">
    <xsd":annotation>
```

```
      <xsd:element name="InternationalRegistrationExpirationDate"
        type="com:DateType">
```

```
        <xsd:documentation>
          Last update: 2018-02-26
          Contact Point: xml.standards@uspto.gov
          ReleaseNotesURL: International Registration Expiration Date
        </xsd:documentation>
      </xsd:annotation>
    </xsd:element>
```

```
5. <xsd:simpleType
  name="ApplicationCategoryType">
```

```
  <xsd:restriction base="xsd:token">
    <xsd:enumeration value="domestic">
      <xsd:annotation>
        <xsd:documentation>Domestic TM
        </xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="international">
      <xsd:annotation>
        <xsd:documentation>International TM
        </xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
  </xsd:restriction>
</xsd:simpleType>
```

```
</xsd:schema>
```

5. Create a new W3C schema file called ApplicationCategory.xsd in the folder “USTrademark”.
6. Set the target Namespace to the IPO’s namespace and add the new namespace xmlns:xxtmk, where xx is an ST.3 Code. Define new element as indicated below
ApplicationCategory element should refer to the ApplicationCategoryType simple type defined above.

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:tmk="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:ustmk="urn:us:gov:doc:uspto:trademark"
  targetNamespace="urn:us:gov:doc:uspto:trademark"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V1_0">
  <xsd:annotation>
    <xsd:documentation>
      Last update: 2018-02-12
      Contact Point: xml.standards@uspto.gov

```

```
ReleaseNotesURL:Common/RegistrationOfficeCode.xsd"/>
<xsd:import
  namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
  schemaLocation=".../Trademark/PreviousRegistrationNumber.xsd"/>
<xsd:import
  namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
  schemaLocation=".../Trademark/PreviousRegistrationDate.xsd"/>
<xsd:import
  namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
  schemaLocation=".../Trademark/DomesticNotificationDate.xsd"/>
<xsd:import
  namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
  schemaLocation=".../Trademark/AutomaticProtectionDate.xsd"/>
<xsd:import
  namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
  schemaLocation=".../Trademark/PreviousRegistrationBasicCategory.xsd"/>
<xsd:import
  namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
  schemaLocation=".../Trademark/PreviousRegistrationCancellationDate.xsd"/>
<xsd:import
  namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
  schemaLocation=".../Trademark/PreviousRegistrationPriorityDate.xsd"/>
<xsd:import
  namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
  schemaLocation=".../Trademark/PreviousRegistrationStatusBag.xsd"/>
<xsd:import
  namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
  schemaLocation=".../Trademark/PriorityClaimIndicator.xsd"/>
<xsd:import
  namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
  schemaLocation=".../Trademark/FirstRefusalIssueIndicator.xsd"/>
```

```
</xsd:documentation>
</xsd:annotation>
```

```

<xsd:include
schemaLocation="InternationalRegistrationExpirationDateApplicationCategoryType
.xsd"/>

<xsd:complexType name="PreviousRegistrationType">
  <xsd:element ref="eom:RegistrationOfficeCode"
minOccurs="0" name="ApplicationCategory"
type="ustmk:ApplicationCategoryType">←
    <xsd:annotation>
      <xsd:documentation>
        Describes type of Trademark application
      </xsd:documentation>
    </xsd:annotation>
  </xsd:element>
  <xsd:element ref="tmk:PreviousRegistrationNumber"/>↑
  <xsd:element ref="tmk:PreviousRegistrationDate" minOccurs="0"/>
  <xsd:element ref="tmk:DomesticNotificationDate" minOccurs="0"/>
  <xsd:element ref="tmk:AutomaticProtectionDate" minOccurs="0"/>
  <xsd:element ref="tmk:PreviousRegistrationBasisCategory"
minOccurs="0"/>
    <xsd:element ref="tmk:PreviousRegistrationCancellationDate"
minOccurs="0"/>
    <xsd:element ref="tmk:PreviousRegistrationPriorityDate"
minOccurs="0"/>
    <xsd:element ref="tmk:PreviousRegistrationStatusBag" minOccurs="0"/>
    <xsd:element ref="tmk:PriorityClaimIndicator" minOccurs="0"/>
    <xsd:element ref="tmk:FirstRefusalIssueIndicator" minOccurs="0"/>
    <xsd:element ref="ustmk:InternationalRegistrationExpirationDate"
minOccurs="0"/>
  </xsd:sequence>
</xsd:schema>

```

7. _____

7. Create a new W3C schema file called
TrademarkApplicationType.xsd in the
folder "USTrademark" -> "Document" folder.

TrademarkApplicationType.xsd in the

8. Set the target Namespace to the IPO's namespace and add the new namespace xmlns:xxtmk, where xx is an ST.3 Code. Element refers to the Type defined above.

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:tmk="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:ustmk="urn:us:gov:doc:uspto:trademark"
  targetNamespace="urn:us:gov:doc:uspto:trademark"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V1_0">
  <!--
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V1_0"-->
```

9. Import the ST.96 Components which are needed to define a new Type TrademarkApplicationType. Do not import RequestSoftware.xsd because that element needs to be removed.

```
<xsd:include schemaLocation="PreviousRegistrationType.xsd"/>
  <!--
  = "../ApplicationCategory.xsd"-->
  <xsd:import
    namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
    schemaLocation="../../Trademark/RequestSearch.xsd"/>
  <xsd:import
    namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    schemaLocation="../../Common/RequestExamination.xsd"/>
  <xsd:import
    namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    schemaLocation="../../Common/DocumentIncludedBag.xsd"/>
  <xsd:import
    namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
    schemaLocation="../../Trademark/TrademarkBag.xsd"/>
  <xsd:import
    namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    schemaLocation="../../Common/PaymentBag.xsd"/>
  <xsd:import
    namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    schemaLocation="../../Common/ReimbursementBag.xsd"/>
  <xsd:import
    namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    schemaLocation="../../Common/SignatureBag.xsd"/>
  <xsd:import
    namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    schemaLocation="../../Common/st96Version.xsd"/>
  <xsd:import
    namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    schemaLocation="../../Common/ipoVersion.xsd"/>
```

10. Create the new Complex Type TrademarkApplicationType which refers to the existing elements except RequestSoftware and add the new element called ApplicationCategory.:

```
<xsd:complexType name="PreviousRegistration" type="TrademarkApplicationType">
  <xsd:sequence>
    <xsd:element
      ref="ustmk:PreviousRegistrationType">ApplicationCategory</xsd:element>
      <xsd:documentation>Data regarding a previous registration</xsd:documentation>
      <xsd:element
        ref="tmk:RequestSearch">RequestSearch</xsd:element>
```

```

<xsd:element ref="com:RequestExamination" minOccurs="0"/>
<xsd:element ref="com:DocumentIncludedBag" minOccurs="0"/>
<xsd:element ref="tmk:TrademarkBag"/>
<xsd:element ref="com:PaymentBag" minOccurs="0"/>
<xsd:element ref="com:ReimbursementBag" minOccurs="0"/>
<xsd:element ref="com:SignatureBag" minOccurs="0"/>
</xsd:sequence>
<xsd:attribute ref="com:st96Version" use="required"/>
<xsd:attribute ref="com:ipoVersion"/>
</xsd:complexType>
</xsd:schema>

```

11. Create a new W3C schema file called

TrademarkApplication.xsd in the folder "USTRademark" .
-> "Document" folder.

12. Set the target Namespace to the IPO's namespace and add the new namespace xmlns:xxtmk, where xx is an ST.3 Code. Define new complex type as indicated below.

```

<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:tmk="http://www.wipo.int/standards/XMLSchema/ST96/Trademark" <xsd:schema>
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:ustmk="urn:us:gov:doc:uspto:trademark"
  targetNamespace="urn:us:gov:doc:uspto:trademark"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V1_0">
  <xsd:complexType name="TrademarkApplicationType">
    <xsd:annotation>
      <xsd:appinfo>
        <com:SchemaCreatedDate>2018-02-12</com:SchemaCreatedDate>
        <com:SchemaLastModifiedDate>2018-02-
    12</com:SchemaLastModifiedDate>
      <com:SchemaContactPoint>xml.standards@wipo.int</com:SchemaContactPoint>
      <com:SchemaReleaseNoteURL/>
      </xsd:appinfo>
    </xsd:annotation>
    <xsd:element ref="TrademarkApplication" type="ustmk:PreviousRegistration"
      maxOccurs="unbounded"/>
    <xsd:complexType name="TrademarkApplicationType">
      <xsd:annotation>
        <xsd:documentation>Details of a trademark application</xsd:documentation>
      </xsd:annotation>
    </xsd:complexType>
  </xsd:element>
</xsd:schema>

```

13. Declare the new element **TrademarkApplication** which refers to **TrademarkApplicationType** defined above.

```

<xsd:include
  schemaLocation="PreviousRegistration.TrademarkApplicationType.xsd"/>
<xsd:complexType name="PreviousRegistrationBagType">
  <xsd:annotation>
    <xsd:appinfo>
      <com:SchemaCreatedDate>2018-02-12</com:SchemaCreatedDate>
      <com:SchemaLastModifiedDate>2018-02-
    12</com:SchemaLastModifiedDate>
      <com:SchemaContactPoint>xml.standards@wipo.int</com:SchemaContactPoint>
      <com:SchemaReleaseNoteURL/>
      </xsd:appinfo>
    </xsd:annotation>
    <xsd:element ref="TrademarkApplication" type="ustmk:PreviousRegistration"
      maxOccurs="unbounded"/>
    <xsd:complexType name="TrademarkApplicationType">
      <xsd:annotation>
        <xsd:documentation>Details of a trademark application</xsd:documentation>
      </xsd:annotation>
    </xsd:complexType>
  </xsd:element>
</xsd:schema>

```

14. The final content model design is shown below:

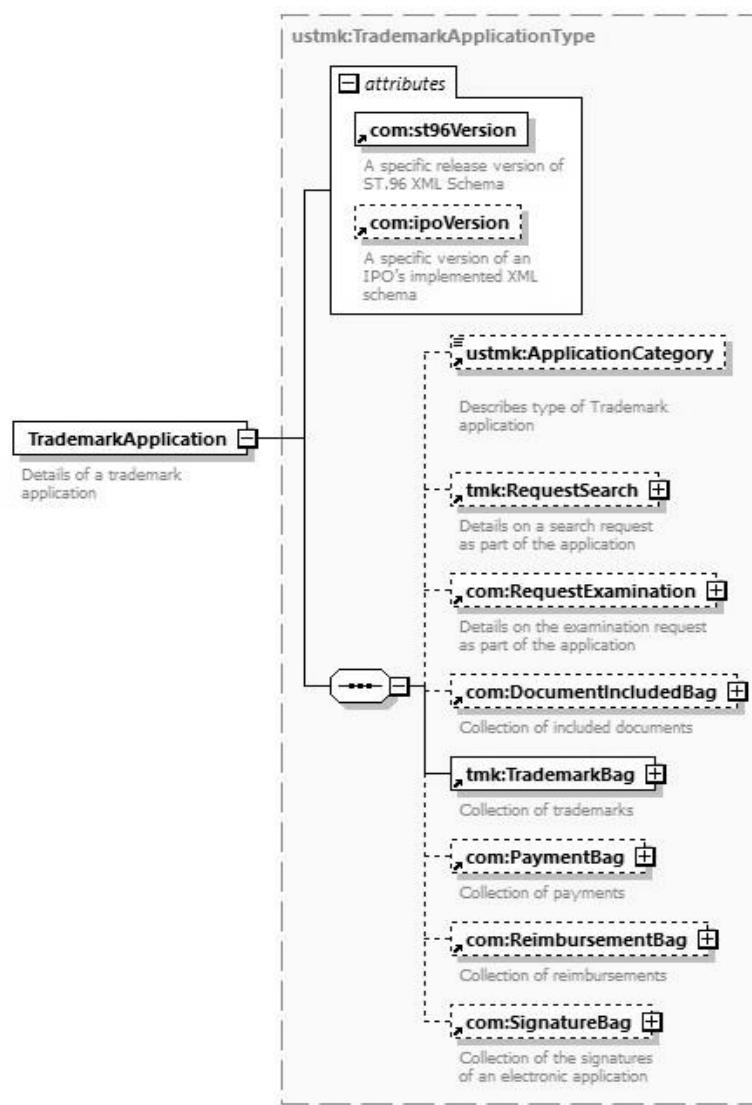


Figure 21: **ustmk: TrademarkApplication**

2. Design-Stage Schemas - Flattened Schemas

2.1. Add an optional element

Same as Appendix A section 2.1

2.2. Add an optional attribute

Same as Appendix A section 2.2

2.3. Remove an optional element

Same as Appendix B section 2.3

2.4. Modify constraints

Same as Appendix B section 2.4

2.5. Make an element required

Same as Appendix B section 2.5

2.6. Add new aggregate component

Same as Appendix A, B section 2.6

2.7. Add new document components

Patent Sample Business Case: Create a new Patent BibliographicData document level model with the required additional components at the top of the ST.96 structure.

1. Create a new W3C schema file called **Bag, USCommon V1_0.xsd** in the same folder **"USTrademark"**, as **BibliographicData V4_0.xsd**.

2. **Element** **refers to the** **Type** defined above. Set the target Namespace to the IPO's namespace and add new namespace entries **xmlns:xxcom**, where **xx** is the lower-case ST.3 Code. Each IPO is expected to version the modified components separate from WIPO because this is the IPO specific implementation. "V1_0" is shown in the following example because this is the first Office modified component.

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent" <xsd:schema>
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:ustmkuscom="urn:us:gov:doc:uspto:trademark_common"
  targetNamespace="urn:us:gov:doc:uspto:trademarkcommon"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V1_0">

  <xsd:include schemaLocation="PreviousRegistrationBagType.xsd"/>
  <xsd:element name="PreviousRegistrationBag"
    type="ustmk:PreviousRegistrationBagType">
    <xsd:documentation>Collection of previous
    registrations</xsd:documentation>
  </xsd:element>
</xsd:schema>
```

3. Define new component **CustomerNumberType** in **USCommon V1_0.xsd**.

```
<xsd:element name="CustomerNumber" type="xsd:string">
  <xsd:annotation>
    <xsd:documentation>Customer number for
    correspondence.</xsd:documentation>
```

```
</xsd:annotation>
</xsd:element>
```

4. Define new component BusinessEntityStatusCategory in USCommon_V1_0.xsd.

```
<xsd:element name="BusinessEntityStatusCategory" type="xsd:token">
    <xsd:annotation>
        <xsd:documentation>Business entity status type.</xsd:documentation>
    </xsd:annotation>
</xsd:element>
```

5. Create a new W3C schema file called **USBibliographicData V1_0.xsd** in the **same** folder **"USTrademark"**. as **BibliographicData V4_0.xsd**.

6. Set the target Namespace to the IPO's namespace and add the new namespace entries `xmlns:xxtm=xxpat`, where xx is **an the lower-case ST.3 Code**. **Define new complex type** **as indicated below. Each IPO is expected to version the modified components separate from WIPO because this is the IPO specific implementation. "V1_0" is shown in the following example because this is the first Office modified component.**

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    xmlns:tmkpat="http://www.wipo.int/standards/XMLSchema/ST96/Trademark_Patent"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema"
    xmlns:ustmk="urn:us:gov:doc:uspto:trademark"
    targetNamespace="urn:us:gov:doc:uspto:trademark"
    elementFormDefault="qualified" attributeFormDefault="qualified"
    version="V1_0">uspat="urn:us:gov:doc:uspto:patent"
    targetNamespace="urn:us:gov:doc:uspto:patent" elementFormDefault="qualified"
    attributeFormDefault="qualified" version="V1_0">
```

7. Define new component MicroformQuantity in USBibliographicData V1_0.xsd.

```
<xsd:element name="MicroformQuantity" type="xsd:positiveInteger">
    <xsd:annotation>
        <xsd:documentation>Microform quantity number</xsd:documentation>
    </xsd:annotation>
</xsd:element>
```

`Common/RegistrationOfficeCode.xsd"/>`

8. Define new component BibliographicDataType in USBibliographicData V1_0.xsd.

```
<xsd:import
    namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common_Patent"
    schemaLocation=".../Common/ReceivingOfficeCode="BibliographicData V4_0.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
    schemaLocation=".../ST96_Common_V4_0.xsd"/>
<xsd:import namespace="urn:us:gov:doc:uspto:common"
    schemaLocation="USCommon_V1_0.xsd"/>

<xsd:complexType name="BibliographicDataType">
    <xsd:complexContent>
        <xsd:extension base="pat:BibliographicDataType">
            <xsd:sequence>
                <xsd:element ref="pat:FigureNumber" minOccurs="0"/>
```

```

        <xsd:element ref="com:ApplicantFileReference"
minOccurs="0"/>
        <xsd:element ref="uscom:CustomerNumber" minOccurs="0"/>
        <xsd:element ref="uscom:BusinessEntityStatusCategory"
minOccurs="0" maxOccurs="unbounded"/>
        <xsd:element ref="uspat:MicroformQuantity"
minOccurs="0"/>
        <xsd:element ref="pat:RepublicationCategory"
minOccurs="0"/>
    </xsd:sequence>
</xsd:extension>
</xsd:complexContent>
</xsd:complexType>

```

9. Define new component BibliographicData in USBibliographicData_V1_0.xsd.

```

<xsd:annotation>
<xsd:appinfo>
<com:SchemaCreatedDate>2015/02/20</com:SchemaCreatedDate>
<com:SchemaLastModifiedDate>2015/02/26</com:SchemaLastModifiedDate>
<com:SchemaContactPoint> USPTO, Enterprise Data Architecture Division
(EDAD) </com:SchemaContactPoint>
<com:SchemaReleaseNoteURL>ReleaseNotes.txt</com:SchemaReleaseNoteURL>
</xsd:appinfo>
</xsd:annotation>
</ReceivingOfficeDate> <xsd:element name="BibliographicData"
type="uspat:BibliographicDataType">
<xsd:annotation>
<xsd:documentation>Bibliographic information included on the first
page of a patent document. Contains document identification, domestic filing
data, foreign priority data, public availability dates or term of protection,
technical information, related patent or application
information</xsd:documentation>
</xsd:annotation>
<xsd:unique name="BibComponentKey">
<xsd:selector xpath=".///*"/>
<xsd:field xpath="@com:id"/>
</xsd:unique>
</xsd:element>

```

10. Complete USBibliographicData_V1_0.xsd file updated in steps 7 – 9 for reference.

```

<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
xmlns:pat="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:uspat="urn:us:gov:doc:uspto:patent"
xmlns:uscom="urn:us:gov:doc:uspto:common"
targetNamespace="urn:us:gov:doc:uspto:patent" elementFormDefault="qualified"
attributeFormDefault="qualified" version="V1_0">

<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Patent"
schemaLocation="BibliographicData_V4_0.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation=".../Common/ApplicationNumber_V4_0.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation=".../Common/RegistrationNumber.xsd"/>

<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common/urn:us:gov:doc:u
spto:common" schemaLocation=".../Common/ApplicationDate="USCommon_V1_0.xsd"/>

```

```
Common/ApplicationDateTime.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation=".../Common/RegistrationDate.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/OtherDate.xsd"/>
Common/FilingPlace.xsd"/>
Common/ApplicantFileReference.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/ApplicantSideCaseIdentifier.xsd"/>
Common/ApplicationLanguageCode.xsd"/>
Common/SecondLanguageCode.xsd"/>
CorrespondenceLanguageCode.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/ExaminedApplicationNumber.xsd"/>
ExpiryDate.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/TerminationDate.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/MarkCurrentStatusCode.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/MarkCurrentStatusDate.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/DesignatedCountryBag.xsd"/>
<xsd:include schemaLocation="PreviousRegistrationBag.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/AssociatedMark.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/DivisionalApplicationBag.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/ConversionApplicationBag.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/BasicRegistrationApplicationBag.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/InternationalMarkIdentifierBag.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/MarkCategory.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/MarkRepresentation.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/MarkDisclaimerBag.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/NonUseCancelledIndicator.xsd"/>
```

```
<xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"  
schemaLocation=".../Trademark/SpecialCircumstanceText.xsd"/>  
<xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"  
schemaLocation=".../Trademark/MarkSeriesTotalQuantity.xsd"/>  
<xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"  
schemaLocation=".../Trademark/TradeDistinctivenessIndicator.xsd"/>  
<xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"  
schemaLocation=".../Trademark/TradeDistinctivenessText.xsd"/>  
<xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"  
schemaLocation=".../Trademark/UseRight.xsd"/>  
<xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"  
schemaLocation=".../Trademark/AsItIsProtectionIndicator.xsd"/>  
<xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"  
schemaLocation=".../Trademark/UseRequirementText.xsd"/>  
<xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"  
schemaLocation=".../Trademark/UseLimitationText.xsd"/>  
CommentText.xsd"/>  
<xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"  
schemaLocation=".../Trademark/OppositionPeriodStartDate.xsd"/>  
<xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"  
schemaLocation=".../Trademark/OppositionPeriodEndDate.xsd"/>  
<xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"  
schemaLocation=".../Trademark/GoodsServicesBag.xsd"/>  
<xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"  
schemaLocation=".../Trademark/PriorityBag.xsd"/>  
Common/ExhibitionPriorityBag.xsd"/>  
<xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"  
schemaLocation=".../Trademark/SeniorityBag.xsd"/>  
<xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"  
schemaLocation=".../Trademark/PublicationBag.xsd"/>  
<xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"  
schemaLocation=".../Trademark/ApplicantBag.xsd"/>  
Common/RepresentativeBag.xsd"/>  
<xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"  
schemaLocation=".../Trademark/NationalRepresentative.xsd"/>  
<xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"  
schemaLocation=".../Trademark/NationalCorrespondent.xsd"/>  
<xsd:import  
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"  
schemaLocation=".../Trademark/RecordAttorney.xsd"/>  
  
Common/StaffBag.  
<xsd"/>:annotation>
```

```

Common/Authorization.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/OppositionBag.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/MarkRecordBag.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/MarkEventBag.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/TrademarkDocumentBag.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/MarkUserBag.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/MarkFeatureDescription.xsd"/>
Trademark" schemaLocation=".../Trademark/AssignmentBag.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/LegalProceedingsBag.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/NationalTrademarkInformation.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/NationalGoodsServices.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/NationalFilingBasis.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/NationalCaseLocation.xsd"/>
Common/CorrespondenceAddress.xsd"/>

```

```

<xsd:appinfo>
  <com:SchemaCreatedDate>2015/02/20</com:SchemaCreatedDate>
  <com:SchemaLastModifiedDate>2015/02/26</com:SchemaLastModifiedDate>
  <com:SchemaContactPoint> USPTO, Enterprise Data Architecture Division
(EDAD) </com:SchemaContactPoint>
  <com:SchemaReleaseNoteURL>ReleaseNotes.txt</com:SchemaReleaseNoteURL>
</xsd:appinfo>
</xsd:annotation>
<xsd:element name="BibliographicData" type="uspat:BibliographicDataType">
  <xsd:annotation>
    <xsd:documentation>Bibliographic information included on the first
page of a patent document. Contains document identification, domestic filing
data, foreign priority data, public availability dates or term of protection,
technical information, related patent or application
information</xsd:documentation>
  </xsd:annotation>
  <xsd:unique name="BibComponentKey">
    <xsd:selector xpath=".///*"/>
    <xsd:field xpath="@com:id"/>
  </xsd:unique>
</xsd:element>

<xsd:complexType name="TrademarkTypeBibliographicDataType">

```

```

      <xsd:element ref="com:RegistrationOfficeCode" minOccurs="0"/>
      <xsd:element ref="com:ReceivingOfficeCode" minOccurs="0"/>
      <xsd:element ref="com:ReceivingOfficeDate" minOccurs="0"/>
      <xsd:choice maxOccurs="unbounded">
        <xsd:element ref="com:ApplicationNumber"/>
        <xsd:element ref="com:RegistrationNumber"
          <xsd:complexType>
            <xsd:extension base="pat:BibliographicDataType">
              <xsd:sequence>
                <xsd:choice minOccurs="0">
                  <xsd:element ref="com:ApplicationDate" pat:FigureNumber"
minOccurs="0"/>
                  <xsd:element
ref="com:ApplicationDateTime" ApplicantFileReference" minOccurs="0"/>
                </xsd:choice>
                <xsd:element ref="com:RegistrationDate" uscom:CustomerNumber"
minOccurs="0"/>
                <xsd:element
ref="tmk:OtherDate" uscom:BusinessEntityStatusCategory" minOccurs="0"
maxOccurs="unbounded"/>
                  <xsd:element ref="com:FilingPlace" minOccurs="0"/>
                  <xsd:element ref="com:ApplicantFileReference" minOccurs="0"/>
                  <xsd:element ref="tmk:ApplicantSideCaseIdentifier" minOccurs="0"/>
                  <xsd:element ref="com:ApplicationLanguageCode" minOccurs="0"/>
                  <xsd:element ref="com:SecondLanguageCode" uspat:MicroformQuantity"
minOccurs="0"/>
                  <xsd:element
ref="com:CorrespondenceLanguageCode" pat:RepublicationCategory" minOccurs="0"/>
                </xsd:sequence>
              </xsd:extension>
            </xsd:complexType>
          </xsd:complexType>
        </xsd:choice>
      </xsd:choice>
    <xsd:element ref="tmk:BasicRegistrationApplicationBag"
minOccurs="0"/>name="MicroformQuantity" type="xsd:positiveInteger">
  
```

```

<xsd:element ref="tmk:InternationalMarkIdentifierBag" minOccurs="0"
maxOccurs="unbounded"/>
<xsd:element ref="tmk:MarkCategory" minOccurs="0"
maxOccurs="unbounded"/>
<xsd:element ref="tmk:MarkRepresentation" minOccurs="0"/>
<xsd:element ref="tmk:MarkDisclaimerBag" minOccurs="0"/>
<xsd:element ref="tmk:NonUseCancelledIndicator" minOccurs="0"/>
<xsd:element ref="tmk:SpecialCircumstanceText" minOccurs="0"/>
<xsd:element ref="tmk:MarkSeriesTotalQuantity" minOccurs="0"/>
<xsd:element ref="tmk:TradeDistinctivenessIndicator" minOccurs="0"/>
<xsd:element ref="tmk:TradeDistinctivenessText" minOccurs="0"/>
<xsd:element ref="tmk:UseRight" minOccurs="0"/>
<xsd:element ref="tmk:AsItIsProtectionIndicator" minOccurs="0"/>
<xsd:element ref="tmk:UseRequirementText" minOccurs="0"/>
<xsd:element ref="tmk:UseLimitationText" minOccurs="0"/>
<xsd:element ref="tmk:OppositionPeriodStartDate" minOccurs="0"/>
<xsd:element ref="tmk:OppositionPeriodEndDate" minOccurs="0"/>
<xsd:element ref="tmk:GoodsServicesBag" minOccurs="0"/>
<xsd:element ref="tmk:PriorityBag" minOccurs="0"/>
<xsd:element ref="com:ExhibitionPriorityBag" minOccurs="0"/>
<xsd:element ref="tmk:SeniorityBag" minOccurs="0"/>
<xsd:element ref="tmk:PublicationBag" minOccurs="0"/>
<xsd:element ref="tmk:ApplicantBag" minOccurs="0"/>
<xsd:element ref="com:RepresentativeBag" minOccurs="0"/>
<xsd:element ref="tmk:NationalRepresentative" minOccurs="0"/>
<xsd:element ref="tmk:NationalCorrespondent" minOccurs="0"/>
<xsd:element ref="tmk:RecordAttorney" minOccurs="0"/>
<xsd:element ref="com:StaffBag" minOccurs="0"/>
<xsd:element ref="com:Authorization" minOccurs="0"/>
<xsd:element ref="tmk:OppositionBag" minOccurs="0"/>
<xsd:element ref="tmk:MarkRecordBag" minOccurs="0"/>
<xsd:element ref="tmk:MarkEventBag" minOccurs="0"/>
<xsd:element ref="tmk:TrademarkDocumentBag" minOccurs="0"/>
<xsd:element ref="tmk:MarkUserBag" minOccurs="0"/>
<xsd:element ref="tmk:MarkFeatureDescription" minOccurs="0"/>
<xsd:element ref="tmk:AssignmentBag" minOccurs="0"/>
<xsd:element ref="tmk:LegalProceedingsBag" minOccurs="0"/>
<xsd:element ref="tmk:NationalTrademarkInformation" minOccurs="0"/>
<xsd:element ref="tmk:NationalGoodsServices" minOccurs="0"/>
<xsd:element ref="tmk:NationalFilingBasis" minOccurs="0"/>
<xsd:element ref="tmk:NationalCaseLocation" minOccurs="0"/>
<xsd:element ref="com:CorrespondenceAddress" minOccurs="0"/>
```

9. Create a new W3C schema file called [REDACTED].xsd in the folder "USTrademark".
10. Set the target Namespace to the IPO's namespace and add the new namespace xmlns:xxtmk, where xx is an ST.3 Code. Element [REDACTED] refers to the [REDACTED] Type defined above.

```

<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:ustmk="urn:us:gov:doc:uspto:trademark"
targetNamespace="urn:us:gov:doc:uspto:trademark"
elementFormDefault="qualified" attributeFormDefault="qualified"
version="V1_0">
<xsd:include schemaLocation="TrademarkType.xsd"/>
<xsd:element name="Trademark" type="ustmk:TrademarkType">
<xsd:annotation>
    <xsd:documentation>Core data regarding the trade mark</
<xsd:annotation>
```

```
<xsd:documentation>
```

11. Create a new W3C schema file called TrademarkBagType.xsd in the folder "USTrademark".
12. Set the target Namespace to the IPO's namespace and add the new namespace xmlns:xxtmk, where xx is an ST.3 Code. Define new complex type TrademarkBagType as indicated below.

```
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:ustmk="urn:us:gov:doc:uspto:trademark"
  targetNamespace="urn:us:gov:doc:uspto:trademark"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V1_0">
  <xsd:include schemaLocation="Trademark.xsd"/>
  <xsd:complexType name="TrademarkBagType">
    <xsd:sequence>
      <xsd:element ref="ustmk:Trademark" maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:schema>
```

13. Create a new W3C schema file called [] Bag.xsd in the folder "USTrademark".
14. Set the target Namespace to the IPO's namespace and add the new namespace xmlns:xxtmk, where xx is an ST.3 Code. Element [] Bag refers to the [] BagType defined above.

```
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:ustmk="urn:us:gov:doc:uspto:trademark"
  targetNamespace="urn:us:gov:doc:uspto:trademark"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V1_0">
  <xsd:include schemaLocation="TrademarkBagType.xsd"/>
  <xsd:element name="TrademarkBag" type="ustmk:TrademarkBagType">
    <xsd:documentation>Collection of trademarks</xsd:documentation>
  </xsd:element>
</xsd:schema>
```

15. Create a new W3C schema file called [] .xsd in the "USTrademark" -> "Document" folder.

16. Set the target Namespace to the IPO's namespace and add the new namespace `xmlns:xxtmk`, where `xx` is an ST-3 Code.

```
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:tmk="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:ustmk="urn:us:gov:doc:uspto:trademark"
  targetNamespace="urn:us:gov:doc:uspto:trademark"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V1_0">
```

17. Trademark Application Type:

```
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation=".../Common/RequestSoftware.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/ApplicationFormName.xsd"/>
<xsd:import
<xsd:import
<xsd:import
<xsd:include schemaLocation=".../TrademarkBag.xsd"/>
<xsd:import
<xsd:import
<xsd:import
<xsd:import
<xsd:import
<xsd:import
<xsd:import
the new Complex Type TrademarkApplicationType which refers to
existing elements and the new element called
InternationalRegistrationExpirationDate being referred through
TrademarkApplicationType -> TrademarkBag -> TrademarkBagType -> Trademark >
```

```

TrademarkType --> PreviousRegistrationBag --> PreviousRegistration -->
InternationalRegistrationExpirationDate.TrademarkApplicationType">
<xsd:sequence>
    <xsd:element ref="com:RequestSoftware" minOccurs="0"/>
    <xsd:element ref="tmk:ApplicationFormName" minOccurs="0"/>
    <xsd:element ref="tmk:RequestSearch" minOccurs="0"/>
    <xsd:element ref="com:RequestExamination" minOccurs="0"/>
    <xsd:element ref="com:DocumentIncludedBag" minOccurs="0"/>
    <xsd:element ref="ustmk:TrademarkBag"/>
    <xsd:element ref="com:PaymentBag" minOccurs="0"/>
    <xsd:element ref="com:ReimbursementBag" minOccurs="0"/>
    <xsd:element ref="com:SignatureBag" minOccurs="0"/>
</xsd:sequence>
<xsd:attribute ref="com:st96Version" use="required"/>
<xsd:attribute ref="com:ipoVersion"/>
    <com:SchemaCreatedDate>2018-02-12</com:SchemaCreatedDate>
    <com:SchemaLastModifiedDate>2018-02-12</com:SchemaLastModifiedDate>
    <com:SchemaContactPoint>xml.standards@wipo.int</com:SchemaContactPoint>
    <com:SchemaReleaseNoteURL/>
<xsd:element name="TrademarkApplication"
type="ustmk:TrademarkApplicationType">
    <xsd:documentation>Details of a trademark
application</xsd:documentation>

```

</xsd:schema>; Remove existing element and add a new element

1. Create a folder called "USTrademark" at the same level as "Patent", "Trademark", "Common".
2. Under USTrademark create new subfolder called "Document".
3. Create a new W3C schema file called ApplicationCategoryType.xsd in the folder "USTrademark".
4. Set the target Namespace to the IPO's namespace and add the new namespace xmlns:xxtmk, where xx is an ST.3 Code. Define ApplicationCategoryType as indicated below.

```

<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
xmlns:tmk="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:ustmk="urn:us:gov:doc:uspto:trademark"
targetNamespace="urn:us:gov:doc:uspto:trademark"
elementFormDefault="qualified" attributeFormDefault="qualified"
version="V1_0">
    <xsd:documentation>
```

</xsd:documentation>

```

<xsd:simpleType name="ApplicationCategoryType">
    <xsd:enumeration value="domestic">
        <xsd:documentation>Domestic TM
        </xsd:documentation>
    <xsd:enumeration value="international">
        <xsd:documentation>Microform quantity number</xsd:documentation>
```

- 5.—Create a new W3C schema file called ApplicationCategory.xsd in the folder “USTrademark”.
- 6.—Set the target Namespace to the IPO’s namespace and add the new namespace `xmlns:xxtmk`, where `xx` is an ST.3 Code. `ApplicationCategory` element should refer to the `ApplicationCategoryType` simple type defined above.

```

<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:tmk="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:ustmk="urn:us:gov:doc:uspto:trademark"
  targetNamespace="urn:us:gov:doc:uspto:trademark"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V1_0">
  <xsd:annotation>
    <xsd:documentation>

    </xsd:documentation>
    </xsd:annotation>
    <xsd:include schemaLocation="ApplicationCategoryType.xsd"/>
    <xsd:element name="ApplicationCategory" <xsd:documentation>
      Describes type of Trademark application
    </xsd:documentation>
    </xsd:annotation>
  </xsd:element>
</xsd:schema>

```

- 7.—Create a new W3C schema file called TrademarkApplicationType.xsd in “USTrademark” → “Document” folder.
- 8.—Set the target Namespace to the IPO’s namespace and add the new namespace `xmlns:xxtmk`, where `xx` is an ST.3 Code.

```

<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:tmk="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:ustmk="urn:us:gov:doc:uspto:trademark"
  targetNamespace="urn:us:gov:doc:uspto:trademark"

```

```
elementFormDefault="qualified" attributeFormDefault="qualified"
version="V1_0">
```

9.

```
<xsd:include schemaLocation=".../ApplicationCategory.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/RequestSearch.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation=".../Common/RequestExamination.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation=".../Common/DocumentIncludedBag.xsd"/>
<xsd:import
namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
schemaLocation=".../Trademark/TrademarkBag.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation=".../Common/PaymentBag.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation=".../Common/ReimbursementBag.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation=".../Common/SignatureBag.xsd"/>
Common/st96Version.xsd"/>
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
schemaLocation=".../Common/ipoVersion.xsd"/>
```

10.

```
<xsd:complexType name="TrademarkApplicationType">
<xsd:sequence>
<xsd:element ref="ustmk:ApplicationCategory" minOccurs="0"/>
<xsd:element ref="tmk:RequestSearch" minOccurs="0"/>
<xsd:element ref="com:RequestExamination" minOccurs="0"/>
<xsd:element ref="com:DocumentIncludedBag" minOccurs="0"/>
<xsd:element ref="tmk:TrademarkBag"/>
<xsd:element ref="com:PaymentBag" minOccurs="0"/>
<xsd:element ref="com:ReimbursementBag" minOccurs="0"/>
<xsd:element ref="com:SignatureBag" minOccurs="0"/>
</xsd:sequence>
<xsd:attribute ref="com:st96Version" use="required"/>
<xsd:attribute ref="com:ipoVersion"/>
</xsd:complexType>
</xsd:schema>
```

11. Create a new W3C schema file called `TrademarkApplication.xsd` in the folder "USTrademark" → "Document" folder.
12. Set the target Namespace to the IPO's namespace and add the new namespace `xmlns:xxtmk`, where xx is an ST.3 Code.

```
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
xmlns:tmk="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:ustmk="urn:us:gov:doc:uspto:trademark"
targetNamespace="urn:us:gov:doc:uspto:trademark"
```

```
elementFormDefault="qualified" attributeFormDefault="qualified"  
version="V1_0">
```

13.—

```
<xsd:include schemaLocation="TrademarkApplicationType.xsd"/>  
_____ <com:SchemaCreatedDate>2018-02-12</com:SchemaCreatedDate>  
_____ <com:SchemaLastModifiedDate>2018-02-12</com:SchemaLastModifiedDate>  
_____ <com:SchemaContactPoint>xml.standards@wipo.int</com:SchemaContactPoint>  
_____ <com:SchemaReleaseNoteURL/>  
<xsd:element name="TrademarkApplication"  
type="ustmk:TrademarkApplicationType">  
<xsd:annotation>  
_____ <xsd:documentation>Details of a trademark  
application</xsd:documentation>  
</xsd:annotation>  
_____ </xsd:element>
```

14.: Add a new element

Trademark Sample Business Case: Add new InternationalRegistrationExpirationDate date element to TrademarkApplication Structure.

1. Create a new W3C schema file, USTrademarkApplication_V1_0.xsd in the same folder as TrademarkApplication_V3_0.xsd.
2. Set the target Namespace to the IPO's namespace and add the new namespace `xmlns:xxtmk`, where xx is an ST.3 Code.

```
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:tmk="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:ustmk="urn:us:gov:doc:uspto:trademark"
  targetNamespace="urn:us:gov:doc:uspto:trademark"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V1_0">
```

3. Import ST.96 Components which are needed to define a new InternationalRegistrationExpirationDate element in PreviousRegistration.

```
<xsd:import namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  schemaLocation="Common_V3_0.xsd"/>
<xsd:import
  namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
  schemaLocation="TrademarkApplication_V3_0.xsd"/>
```

4. Define InternationalRegistrationExpirationDate as indicated below.

```
<xsd:element name="InternationalRegistrationExpirationDate"
  type="com:DateType">
  <xsd:documentation>International Registration Expiration Date</xsd:documentation>
</xsd:element>
```

5. Remove PreviousRegistrationType complex type from ST.96 Trademark namespace (TrademarkApplication_V3_0.xsd) and declare new complex type PreviousRegistrationType as defined in USTrademarkApplication_V1_0.xsd.

```
<xsd:complexType name="PreviousRegistrationType">
  <xsd:sequence>
    <xsd:element ref="com:RegistrationOfficeCode" minOccurs="0"/>
    <xsd:element ref="tmk:PreviousRegistrationNumber"/>
    <xsd:element ref="tmk:PreviousRegistrationDate" minOccurs="0"/>
    <xsd:element ref="tmk:DomesticNotificationDate" minOccurs="0"/>
    <xsd:element ref="tmk:AutomaticProtectionDate" minOccurs="0"/>
    <xsd:element ref="tmk:PreviousRegistrationBasicCategory"
      minOccurs="0"/>
    <xsd:element ref="tmk:PreviousRegistrationCancellationDate"
      minOccurs="0"/>
    <xsd:element ref="tmk:PreviousRegistrationPriorityDate"
      minOccurs="0"/>
    <xsd:element ref="tmk:PreviousRegistrationStatusBag" minOccurs="0"/>
    <xsd:element ref="tmk:PriorityClaimIndicator" minOccurs="0"/>
  </xsd:sequence>
</xsd:complexType>
```

```

    <xsd:element ref="tmk:FirstRefusalIssueIndicator" minOccurs="0"/>
    <xsd:element ref="ustmk:InternationalRegistrationExpirationDate"
minOccurs="0"/>
    <xsd:element ref="com:CommentText" minOccurs="0"/>
</xsd:sequence>
</xsd:complexType>
```

6. Remove PreviousRegistration element from ST.96 Trademark namespace (TrademarkApplication_V3_0.xsd) and declare new element PreviousRegistration as defined in USTrademarkApplication_V1_0.xsd.

```

<xsd:element name="PreviousRegistration"
type="ustmk:PreviousRegistrationType">
    <xsd:documentation>Data regarding a previous
registration</xsd:documentation>
```

7. Remove PreviousRegistrationBagType complex type from ST.96 Trademark namespace (TrademarkApplication_V3_0.xsd) and declare new complex type PreviousRegistrationBagType as defined in USTrademarkApplication_V1_0.xsd.

```

<xsd:complexType name="PreviousRegistrationBagType">
    <xsd:sequence>
        <xsd:element ref="ustmk:PreviousRegistration"
maxOccurs="unbounded"/>
    </xsd:sequence>
</xsd:complexType>
```

8. Remove PreviousRegistrationBag element from ST.96 Trademark namespace (TrademarkApplication_V3_0.xsd) and declare new element PreviousRegistrationBag as defined in USTrademarkApplication_V1_0.xsd.

```

<xsd:element name="PreviousRegistrationBag"
type="ustmk:PreviousRegistrationBagType">
    <xsd:documentation>Collection of previous
registrations</xsd:documentation>
    <xsd:choice minOccurs="0">
        <xsd:element ref="com:ApplicationDate"/>
        <xsd:element ref="com:ApplicationDateTime"/>
        <xsd:element ref="com:RegistrationDate" minOccurs="0"/>
        <xsd:element ref="tmk:OtherDate" minOccurs="0"
maxOccurs="unbounded"/>
        <xsd:element ref="com:FilingPlace" minOccurs="0"/>
        <xsd:element ref="com:ApplicantFileReference" minOccurs="0"/>
        <xsd:element ref="tmk:ApplicantSideCaseIdentifier" minOccurs="0"/>
        <xsd:element ref="com:ApplicationLanguageCode" minOccurs="0"/>
        <xsd:element ref="com:SecondLanguageCode" minOccurs="0"/>
        <xsd:element ref="com:CorrespondenceLanguageCode" minOccurs="0"/>
        <xsd:element ref="tmk:ExaminedApplicationNumber" minOccurs="0"/>
        <xsd:element ref="com:ExpiryDate" minOccurs="0"/>
        <xsd:element ref="tmk:TerminationDate" minOccurs="0"/>
        <xsd:element ref="tmk:MarkCurrentStatusCode" minOccurs="0"/>
        <xsd:element ref="tmk:MarkCurrentStatusDate" minOccurs="0"/>
        <xsd:element ref="tmk:DesignatedCountryBag" minOccurs="0"/>
        <xsd:element ref="ustmk:PreviousRegistrationBag" minOccurs="0"/>
        <xsd:element ref="tmk:AssociatedMark" minOccurs="0"/>
        <xsd:element ref="tmk:DivisionalApplicationBag" minOccurs="0"/>
        <xsd:element ref="tmk:ConversionApplicationBag" minOccurs="0"/>
    </xsd:choice>
</xsd:element>
```

```

<xsd:element ref="tmk:BasicRegistrationApplicationBag"
minOccurs="0"/>
<xsd:element ref="tmk:InternationalMarkIdentifierBag" minOccurs="0"
maxOccurs="unbounded"/>
<xsd:element ref="tmk:MarkCategory" minOccurs="0"
maxOccurs="unbounded"/>
<xsd:element ref="tmk:MarkRepresentation" minOccurs="0"/>
<xsd:element ref="tmk:MarkDisclaimerBag" minOccurs="0"/>
<xsd:element ref="tmk:NonUseCancelledIndicator" minOccurs="0"/>
<xsd:element ref="tmk:SpecialCircumstanceText" minOccurs="0"/>
<xsd:element ref="tmk:MarkSeriesTotalQuantity" minOccurs="0"/>
<xsd:element ref="tmk:TradeDistinctivenessIndicator" minOccurs="0"/>
<xsd:element ref="tmk:TradeDistinctivenessText" minOccurs="0"/>
<xsd:element ref="tmk:UseRight" minOccurs="0"/>
<xsd:element ref="tmk:AsItIsProtectionIndicator" minOccurs="0"/>
<xsd:element ref="tmk:UseRequirementText" minOccurs="0"/>
<xsd:element ref="tmk:UseLimitationText" minOccurs="0"/>
<xsd:element ref="com:CommentText" minOccurs="0"/>
<xsd:element ref="tmk:OppositionPeriodStartDate" minOccurs="0"/>
<xsd:element ref="tmk:OppositionPeriodEndDate" minOccurs="0"/>
<xsd:element ref="tmk:GoodsServicesBag" minOccurs="0"/>
<xsd:element ref="tmk:PriorityBag" minOccurs="0"/>
<xsd:element ref="com:ExhibitionPriorityBag" minOccurs="0"/>
<xsd:element ref="tmk:SeniorityBag" minOccurs="0"/>
<xsd:element ref="tmk:PublicationBag" minOccurs="0"/>
<xsd:element ref="tmk:ApplicantBag" minOccurs="0"/>
<xsd:element ref="com:RepresentativeBag" minOccurs="0"/>
<xsd:element ref="tmk:NationalRepresentative" minOccurs="0"/>
<xsd:element ref="tmk:NationalCorrespondent" minOccurs="0"/>
<xsd:element ref="tmk:RecordAttorney" minOccurs="0"/>
<xsd:element ref="com:StaffBag" minOccurs="0"/>
<xsd:element ref="com:Authorization" minOccurs="0"/>
<xsd:element ref="tmk:OppositionBag" minOccurs="0"/>
<xsd:element ref="tmk:MarkRecordBag" minOccurs="0"/>
<xsd:element ref="tmk:MarkEventBag" minOccurs="0"/>
<xsd:element ref="tmk:TrademarkDocumentBag" minOccurs="0"/>
<xsd:element ref="tmk:MarkUserBag" minOccurs="0"/>
<xsd:element ref="tmk:MarkFeatureDescription" minOccurs="0"/>
<xsd:element ref="tmk:AssignmentBag" minOccurs="0"/>
<xsd:element ref="tmk:LegalProceedingsBag" minOccurs="0"/>
<xsd:element ref="tmk:NationalTrademarkInformation" minOccurs="0"/>
<xsd:element ref="tmk:NationalGoodsServices" minOccurs="0"/>
<xsd:element ref="tmk:NationalFilingBasis" minOccurs="0"/>
<xsd:element ref="tmk:NationalCaseLocation" minOccurs="0"/>
<xsd:element ref="com:CorrespondenceAddress" minOccurs="0"/>
</xsd:complexType>
```

9. Remove [] element from ST.96 Trademark namespace (TrademarkApplication_V3_0.xsd) and declare new element [] as defined in USTrademarkApplication_V1_0.xsd.

```
<xsd:element name="Trademark" type="ustmk:TrademarkType">
  <xsd:annotation>
    <xsd:documentation>Core data regarding the trade
mark</xsd:documentation>
  </xsd:annotation>
</xsd:element>
```

10. Remove [REDACTED] complex type from ST.96 Trademark namespace
(TrademarkApplication_V2_0.xsd) and declare new complex type [REDACTED] as defined in USTrademarkApplication_V1_0.xsd.

```
<xsd:complexType name="TrademarkBagType">
  <xsd:sequence>
    <xsd:element ref="ustmk:Trademark" maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
```

11. Remove [REDACTED] element from ST.96 Trademark namespace (TrademarkApplication_V3_0.xsd)
and declare new element [REDACTED] as defined in USTrademarkApplication_V1_0.xsd.

```
<xsd:element name="TrademarkBag" type="ustmk:TrademarkBagType">
  <xsd:annotation>
    <xsd:documentation>Collection of trademarks</xsd:documentation>
  </xsd:annotation>
</xsd:element>
```

12. Remove [REDACTED] complex type from ST.96 Trademark namespace
(TrademarkApplication_V3_0.xsd) and declare new complex type [REDACTED] as defined in USTrademarkApplication_V1_0.xsd.

```
<xsd:complexType name="TrademarkApplicationType">
  <xsd:sequence>
    <xsd:element ref="com:RequestSoftware" minOccurs="0"/>
    <xsd:element ref="tmk:ApplicationFormName" minOccurs="0"/>
    <xsd:element ref="tmk:RequestSearch" minOccurs="0"/>
    <xsd:element ref="com:RequestExamination" minOccurs="0"/>
    <xsd:element ref="com:DocumentIncludedBag" minOccurs="0"/>
    <xsd:element ref="ustmk:TrademarkBag"/>
    <xsd:element ref="com:PaymentBag" minOccurs="0"/>
    <xsd:element ref="com:ReimbursementBag" minOccurs="0"/>
    <xsd:element ref="com:SignatureBag" minOccurs="0"/>
  </xsd:sequence>
  <xsd:attribute ref="com:st96Version" use="required"/>
  <xsd:attribute ref="com:ipoVersion"/>
```

13. Remove [REDACTED] element from ST.96 Trademark namespace
(TrademarkApplication_V3_0.xsd) and declare new element [REDACTED] as defined in USTrademarkApplication_V1_0.xsd.

```
<xsd:element name="TrademarkApplication"
  type="ustmk:TrademarkApplicationType">
  <xsd:documentation>Details of a trademark
application</xsd:documentation>
</xsd:element>
```

12. The final content model design [compared to ST.96 copy](#) is shown below:

1.4 —



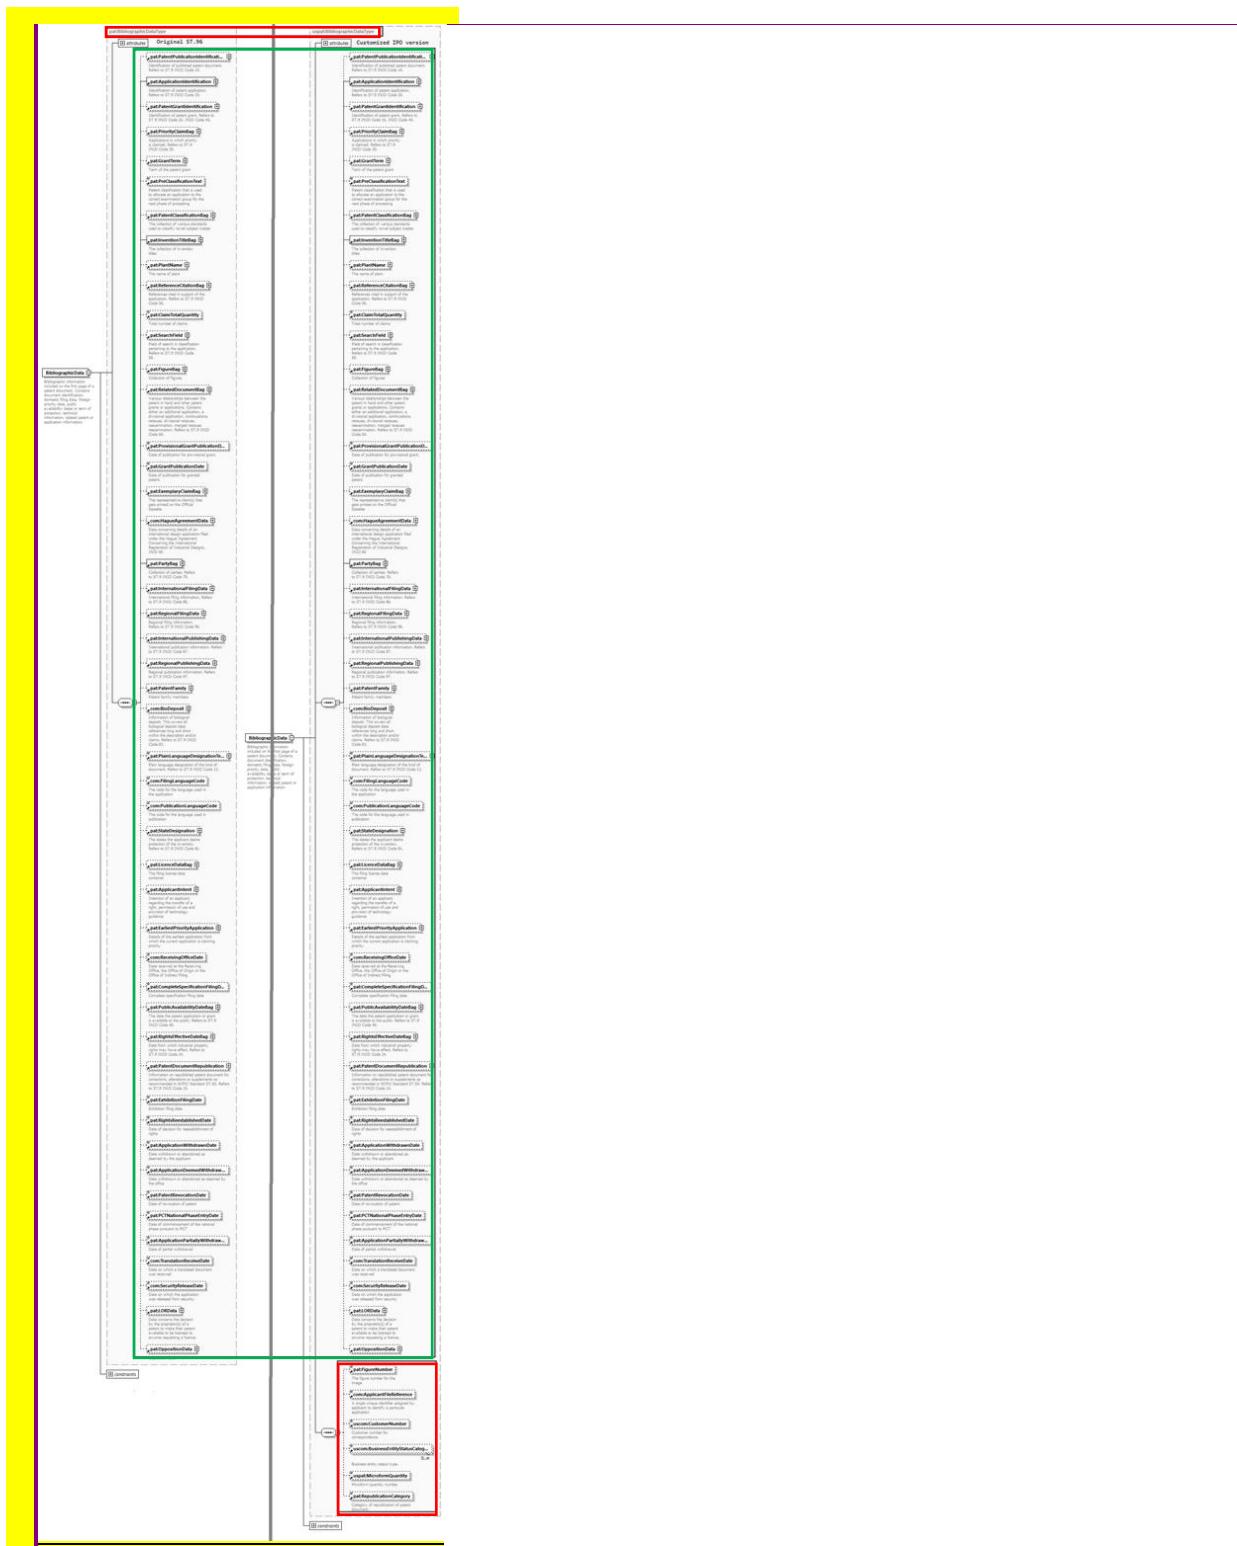


Figure 22: uspat: BibliographicData: customized versus official

2.8. :- Remove an existing element and add a new element

In order to add a new element and remove an existing one, developers **SHOULD** follow the following steps:

Trademark Sample Business Case: Remove the RequestSoftware element and add the ApplicationCategory element to the TrademarkApplication Structure:

1. **1.** Create a new W3C schema file, USTrademarkApplication_V1_0.xsd in the same folder as TrademarkApplication_V3_0V4_01.xsd.

Set the target Namespace to the IPO's namespace and add the new namespace xmlns:xxtmk, where xx is an ST.3 Code. **2. Set the target Namespace to the IPO's namespace and add the new namespace xmlns:xxtmk, where xx is an ST.3 Code.**

- 2.

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:com="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  xmlns:tmk="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:ustmk="urn:us:gov:doc:uspto:trademark"
  targetNamespace="urn:us:gov:doc:uspto:trademark"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  version="V1_0">
```

- 3.

3. Import ST.96 Components which are needed to define a new Type TrademarkApplicationType.

```
<xsd:import
  namespace="http://www.wipo.int/standards/XMLSchema/ST96/Common"
  schemaLocation="Common_V3_0V4_01.xsd"/>
<xsd:import
  namespace="http://www.wipo.int/standards/XMLSchema/ST96/Trademark"
  schemaLocation="TrademarkApplication_V3_0V4_01.xsd"/>
```

- 4.

4. Define ApplicationCategoryType as indicated below.

```
<xsd:simpleType name="ApplicationCategoryType">
  <xsd:restriction base="xsd:token">
    <xsd:enumeration value="domestic">
      <xsd:annotation>
        <xsd:documentation>Domestic TM
        </xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="international">
```

- 5.

</xsd:enumeration>

</xsd:restriction> </xsd:simpleType>

5. Declare new element ApplicationCategory and refer to the ApplicationCategoryType simple type defined above.

```
<xsd:element name="ApplicationCategory" type="ustmk:ApplicationCategoryType">
  <xsd:annotation>
    <xsd:documentation>
      Describes type of Trademark application
    </xsd:documentation>
  </xsd:annotation>
```

```
</xsd:element>
```

6.

6. Create the new Complex Type TrademarkApplicationType which refers to existing elements except RequestSoftware and add the new element called ApplicationCategory.

```
<xsd:complexType name="TrademarkApplicationType">
<xsd:sequence>
    <xsd:element ref="ustmk:ApplicationCategory" minOccurs="0"/>
    <xsd:element ref="tmk:ApplicationFormName" minOccurs="0"/>
    <xsd:element ref="tmk:RequestSearch" minOccurs="0"/>
    <xsd:element ref="com:RequestExamination" minOccurs="0"/>
    <xsd:element ref="com:DocumentIncludedBag" minOccurs="0"/>
    <xsd:element ref="tmk:TrademarkBag"/>
    <xsd:element ref="com:PaymentBag" minOccurs="0"/>
    <xsd:element ref="com:ReimbursementBag" minOccurs="0"/>
    <xsd:element ref="com:SignatureBag" minOccurs="0"/>
</xsd:sequence>
<xsd:attribute ref="com:st96Version" use="required"/>
<xsd:attribute ref="com:ipoVersion"/>
</xsd:complexType>
```

Declare the new element TrademarkApplication which refers to TrademarkApplicationType defined above.

```
<xsd:complexType name="TrademarkApplicationType">
<xsd:sequence>
    <xsd:element ref="ustmk:ApplicationCategory" minOccurs="0"/>
    <xsd:element ref="tmk:ApplicationFormName" minOccurs="0"/>
    <xsd:element ref="tmk:RequestSearch" minOccurs="0"/>
    <xsd:element ref="com:RequestExamination" minOccurs="0"/>
    <xsd:element ref="com:DocumentIncludedBag" minOccurs="0"/>
    <xsd:element ref="tmk:TrademarkBag"/>
    <xsd:element ref="com:PaymentBag" minOccurs="0"/>
    <xsd:element ref="com:ReimbursementBag" minOccurs="0"/>
    <xsd:element ref="com:SignatureBag" minOccurs="0"/>
</xsd:sequence>
<xsd:attribute ref="com:st96Version" use="required"/>
<xsd:attribute ref="com:ipoVersion"/>
</xsd:complexType>
```

7. Declare the new element TrademarkApplication which refers to TrademarkApplicationType defined above.

7.

```
<xsd:element name="TrademarkApplication"
type="ustmk:TrademarkApplicationType">
    <xsd:annotation>
        <xsd:documentation>Details of a trademark
application</xsd:documentation>
    </xsd:annotation>
</xsd:element>
```

8. The final content model design is shown below:

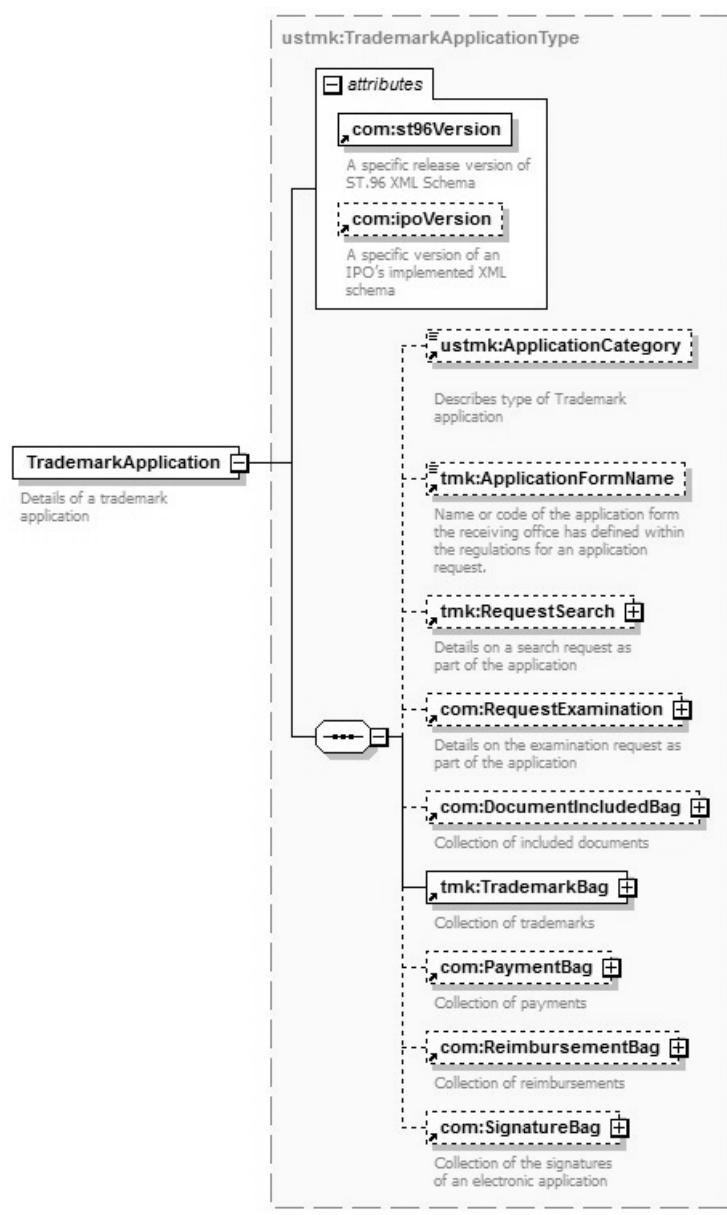


Figure 23: ustmk: TrademarkApplication

[Annex VI follows]